

LEDVANCE.COM



LEDVANCE



# OUTDOOR LUMINAIRE PROGRAM 2023

# CONTENT



<b>FLOODLIGHTS</b>	<b>3</b>
WORKLIGHTS R-STAND SOCKET (GEN 2)	3
LED WORKLIGHT BATTERY	5
LED WORKLIGHT3X50WCHRGMOB 840TRIPOD	7
WORKLIGHTS - TRIPOD 1X20 W 4000 K	9
LED WORKLIGHT PANEL 50W 840	11
ENDURA® PRO FLOOD SENSOR 15 W 1500 840 IP55 WT	13
ENDURA® GARDEN FLOOD 10 W 830 SPIKE	15



<b>SOLAR LUMINAIRES</b>	<b>17</b>
ENDURA FLOOD SOLAR	17
ENDURA STYLE SOL BOUQUET	19
ENDURA® STYLE SOLAR DOUBLE CIRCLE	21
ENDURA® STYLE SOLAR SINGLE CIRCLE WALL CIRCLE 6W BK	23
ENDURA GARDEN SOL SPOT WALLSPIKE DG	25
ENDURA GARDEN SOLAR OVAL WALL	29
ENDURA GARDEN SOLAR FUNGUS WALL	31
ENDURA GARDEN SOLAR TOSSA WALL	33



<b>SMART+ OUTDOOR LUMINAIRES</b>	<b>33</b>
SMART OUTD WIFI FLOOD CAMERA REM DG	33
SMART WIFI FLOOD	35
SMART OUTD WIFI ROUND CAMERA DG	37
SMART OUTD WIFI WALL CAMERA REM DG	39
SMART OUTD WIFI CLOUD CAMERA	41
SMART OUTD WIFI GLOBE E27 CAMERA	43
SMART OUTD WIFI MULTISPOT CAMERA	45
SMART OUTD WIFI CIRCLE CAMERA CONTROL WALL&CEILING	47
SMART OUTD WIFI ENTRANCE CAMERA	49
SMART OUTD WIFI TABLEFRAME USB RGBW	51
SMART OUTD WIFI PIPE	53
SMART OUTD WIFI CASCADE	55
SMART OUTD WIFI UPDFLARE	57
SMART OUTD WIFI BRICK	59
SMART WIFI CUBE	61
SMART WIFI CURVE WALL	63
SMART WIFI FLARE	65
SMART+ WIFI OUTD ROTARY UPDOWN RGBW	67
SMART+ WIFI OUTD BEAM ADJUST WALL RGBW	69
SMART+ WIFI OUTD ECLIPSE	71
SMART+ WIFI OUTD TRUNK	73
SMART+ WIFI SWING ROUND	75
SMART+ WIFI TABLE FRAME SOLAR	77
SMART+ OUTDOOR SPOT & BOLLARD + INDEPENDENT SOLAR PANEL	79
SMART+ OUTDOOR SOLAR ALPS	81
SMART+ OUTDOOR SOLAR PATH LIGHT IP44 RGBW	83
SMART+ OUTDOOR SOLAR SPOT LIGHT IP44 RGBW	85
SMART WIFI NEON FLEX	87
SMART WIFI GARDENPOLE	89
SMART WIFI GARDENSPOT	91
SMART WIFI GARDEN DOT	93



## OUTDOOR LUMINAIRES

95

ENDURA STYLE BAT	95
ENDURA STYLE DISC WALL	97
ENDURA STYLE BOW WALL DG	99
ENDURA STYLE CRYSTAL	101
ENDURA STYLE EDGE WALL UPDOWN 7W ST	103
ENDURA STYLE FLARE	105
ENDURA STYLE PLATE WALL	107
ENDURA STYLE PYRAMID	109
ENDURA® STYLE CYLINDER	111
ENDURA® STYLE ELLIPSE	113
ENDURA® STYLE LANTERN MODERN	115
ENDURA® STYLE MIDI SPOT	117
ENDURA® STYLE MINI SPOT	119
ENDURA® STYLE RING RD 13 W DG	121
ENDURA® STYLE SHIELD	123
ENDURA® STYLE SPOT ROUND 8 W DG	125
ENDURA® STYLE SQUARE	127
ENDURA® STYLE UPDOWN DECO	129
ENDURA® STYLE UPDOWN FLEX 13 W DG	131
ENDURA® STYLE UPDOWN	133
ENDURA® STYLE UPDOWN PUCK	135
ENDURA® STYLE WALL	137
ENDURA® STYLE WALL WIDE SENSOR 12W DG	139
ENDURA® STYLE WIDE	141
ENDURA CLASSIC PIPE	143
ENDURA CLASSIC CASCADE AMBER	145
ENDURA CLASSIC CASCADE	147
ENDURA CLASSIC FRAME	149
ENDURA CLASSIC CANNON	151
ENDURA CLASSIC BEAM	153
ENDURA CLASSIC CALICE	155
ENDURA CLASSIC ROTARY UPDOWN GU10	157
ENDURA CLASSIC GARDENSPOT SPIKE GU10	159
ENDURA CLASSIC CUBE	161
ENDURA CLASSIC DOWN/UPDOWN	163
ENDURA® CLASSIC LANTERN CYLINDER	165
ENDURA® CLASSIC LANTERN SQ	167
ENDURA® CLASSIC POST	169
ENDURA® CLASSIC TRADITION ALU	171
ENDURA GARDEN DOT	173
NEON FLEX	175
NEON DIGITALFLEX	177
ENDURA® PRO SPOT SENSOR	179
ENDURA® PRO UPDOWN SENSOR 10 W 1000 840 IP55 WT	181
SMART+ OUTDOOR STRING LIGHT IP44 RGBW	183

## **WORKLIGHTS R-STAND SOCKET**

FLEXIBLE, PORTABLE WORKLIGHT WITH INCLUDED POWER OUTLETS





1  
LED WORKLIGHT R-STAND SOCKET  
50 W 4000 K



2  
LED WORKLIGHT R-STAND SOCKET  
30 W 4000 K



3  
LED WORKLIGHT R-STAND SOCKET  
20 W 4000 K



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	tn <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	°C	K
LED WORKLIGHT R-STAND SOCKET 50 W 4000 K	4058075321342	1	Dark gray	Aluminum/Steel	25 000	50.00	4500	-	-20...+45	4000
LED WORKLIGHT R-STAND SOCKET 30 W 4000 K	4058075321328	2	Dark gray	Aluminum/Steel	25 000	30.00	2700	-	-20...+45	4000
LED WORKLIGHT R-STAND SOCKET 20 W 4000 K	4058075321304	3	Dark gray	Aluminum/Steel	25 000	20.00	1700	-	-20...+45	4000

Product name	CRI	°	IP	lm	w (mm)	w (mm)	h (mm)	mm
LED WORKLIGHT R-STAND SOCKET 50 W 4000 K	≥80	120	IP44	100 000	278.0	270.0	375.0	2
LED WORKLIGHT R-STAND SOCKET 30 W 4000 K	≥80	120	IP44	100 000	224.0	232.0	307.0	4
LED WORKLIGHT R-STAND SOCKET 20 W 4000 K	≥80	120	IP44	100 000	224.0	227.0	278.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## WORKLIGHT BATTERY

PORTABLE LED WORKLIGHTS WITH INTEGRATED BATTERY FOR OFF-GRID OPERATION





1  
LED WORKLIGHT BATTERY  
10W



2  
LED WORKLIGHT BATTERY  
67cm Tube


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	$t(h)$ <sup>2</sup>	W	$l_m$ <sup>3</sup> OUTPUT	$l_m$ <sup>4</sup> LIGHT SOURCE	K	CRI	
LED WORKLIGHT BATTERY 10W	4058075576476	3	Orange	Aluminum/Plastic	15 000	10.00	800	900	4 000	≥80	110
LED WORKLIGHT BATTERY Tube	4058075576551	4	Orange	Plastic	15 000	10.00	800	1 250	4 000	≥80	110

Product name			$l$ [mm]	$b$ [mm]	$h$ [mm]	
LED WORKLIGHT BATTERY 10W	IP44	15 000	200.0	206.0	276.0	4
LED WORKLIGHT BATTERY Tube	IP20	15 000	704.0	72.0	42.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **WORKLIGHTS TRIPOD – ADJUST AND REMOVE**

LED WORKLIGHT WITH A STABLE TRIPOD AND REMOVABLE FLOODLIGHTS FOR SEPARATE USE

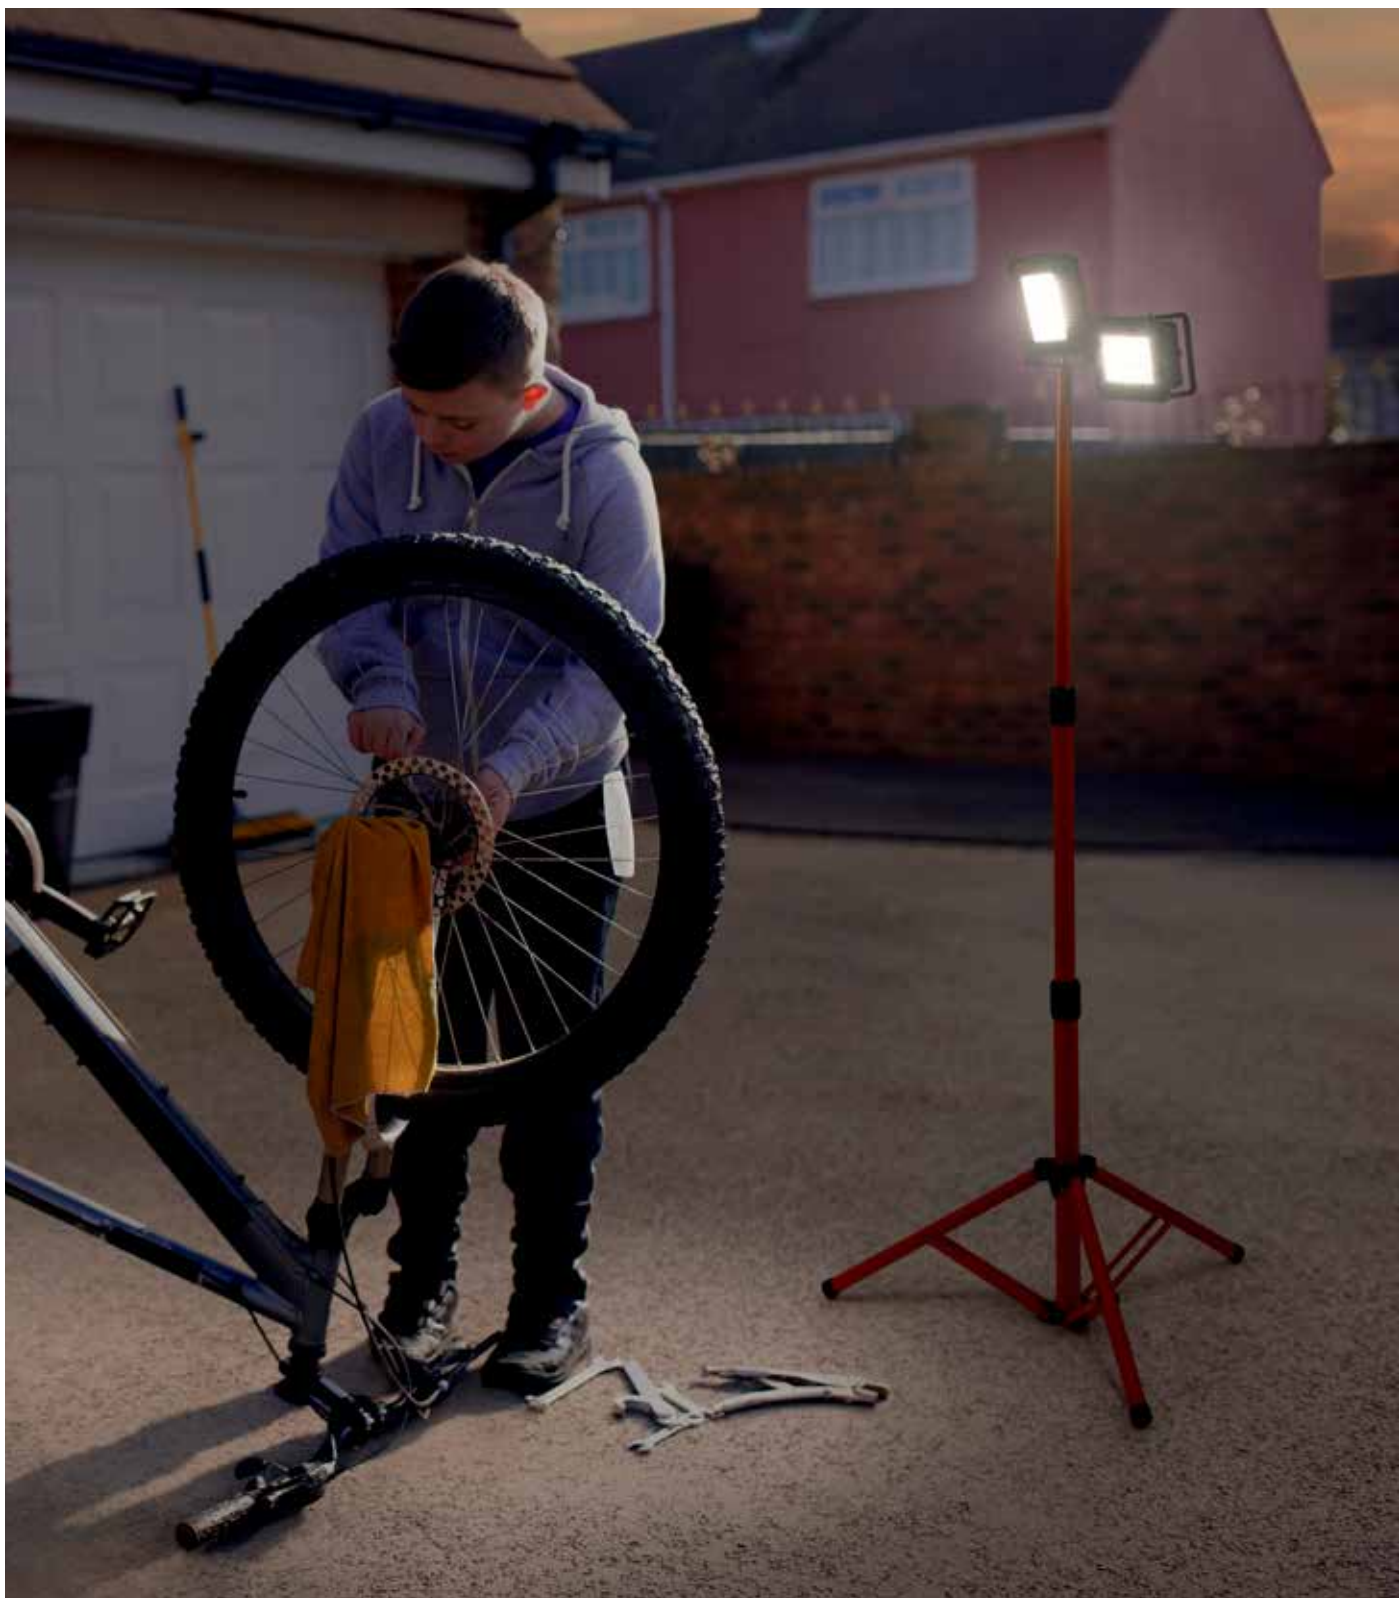





1  
LED WORKLIGHT BATTERY  
3 LIGHT CHARGEABLE  
1x30W + 2x5W



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W <sup>3</sup>	lm <sup>4</sup> OUTPUT	lm <sup>5</sup> LIGHT SOURCE	K	CRI	°
--------------	------------	-----	-------	----------	-------------------	----------------	------------------------	------------------------------	---	-----	---

LED WORKLIGHT BATTERY 3 LIGHT CHARGEABLE	4058075576575	1	Orange	Aluminum/Plastic	15000	40.00	3600	-	4000	≥80	110
--	---------------	---	--------	------------------	-------	-------	------	---	------	-----	-----

Product name	IP	l (mm)	b (mm)	h (mm)	2
--------------	----	--------	--------	--------	---

LED WORKLIGHT BATTERY 3 LIGHT CHARGEABLE	IP54	15000	1694.0	755.0	658.0	2
--	------	-------	--------	-------	-------	---

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> 40 W = 1 x 30 W + 2 x 5 W | <sup>4</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>5</sup> Total luminous flux of the contained light sources without the diffuser

## **WORKLIGHTS – TRIPOD**

WORKLIGHTS WITH ROBUST STAND





1  
LED WORKLIGHT TRIPOD  
2X50 W 4000 K



2  
LED WORKLIGHT TRIPOD  
2X30 W 4000 K



3  
LED WORKLIGHT TRIPOD  
1X50 W 4000 K



4  
LED WORKLIGHT TRIPOD  
2X20 W 4000 K



5  
LED WORKLIGHT TRIPOD  
1X30 W 4000 K



6  
LED WORKLIGHT TRIPOD  
1X20 W 4000 K




Product name	GTIN (EAN)	No.	COLOR	MATERIAL	tn <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	°C	K
LED WORKLIGHT TRIPOD 2X50 W 4000 K	4058075213999	1	Dark gray	Aluminum/Steel	25 000	100.00	9000	-	-20...+45	4000
LED WORKLIGHT TRIPOD 2X30 W 4000 K	4058075213951	2	Dark gray	Aluminum/Steel	25 000	60.00	3400	-	-20...+45	4000
LED WORKLIGHT TRIPOD 1X50 W 4000 K	4058075213975	3	Dark gray	Aluminum/Steel	25 000	50.00	4500	-	-20...+45	4000
LED WORKLIGHT TRIPOD 2X20 W 4000 K	4058075213913	4	Dark gray	Aluminum/Steel	25 000	40.00	3400	-	-20...+45	4000
LED WORKLIGHT TRIPOD 1X30 W 4000 K	4058075213937	5	Dark gray	Aluminum/Steel	25 000	30.00	2700	-	-20...+45	4000
LED WORKLIGHT TRIPOD 1X20 W 4000 K	4058075213890	6	Dark gray	Aluminum/Steel	25 000	20.00	1700	-	-20...+45	4000

Product name	CRI	°C	IP	lm	l (mm)	w (mm)	h (mm)	Weight
LED WORKLIGHT TRIPOD 2X50 W 4000 K	≥80	120	IP65	100 000	780.0	680.0	1 800.0	4
LED WORKLIGHT TRIPOD 2X30 W 4000 K	≥80	120	IP65	100 000	780.0	680.0	1 750.0	4
LED WORKLIGHT TRIPOD 1X50 W 4000 K	≥80	120	IP65	100 000	780.0	680.0	1 800.0	4
LED WORKLIGHT TRIPOD 2X20 W 4000 K	≥80	120	IP65	100 000	780.0	680.0	1 700.0	4
LED WORKLIGHT TRIPOD 1X30 W 4000 K	≥80	120	IP65	100 000	780.0	680.0	1 750.0	4
LED WORKLIGHT TRIPOD 1X20 W 4000 K	≥80	120	IP65	100 000	780.0	680.0	1 700.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## WORKLIGHT PANEL

LED PANEL WORKLIGHT FOR A PARTICULARLY UNIFORM LIGHT DISTRIBUTION

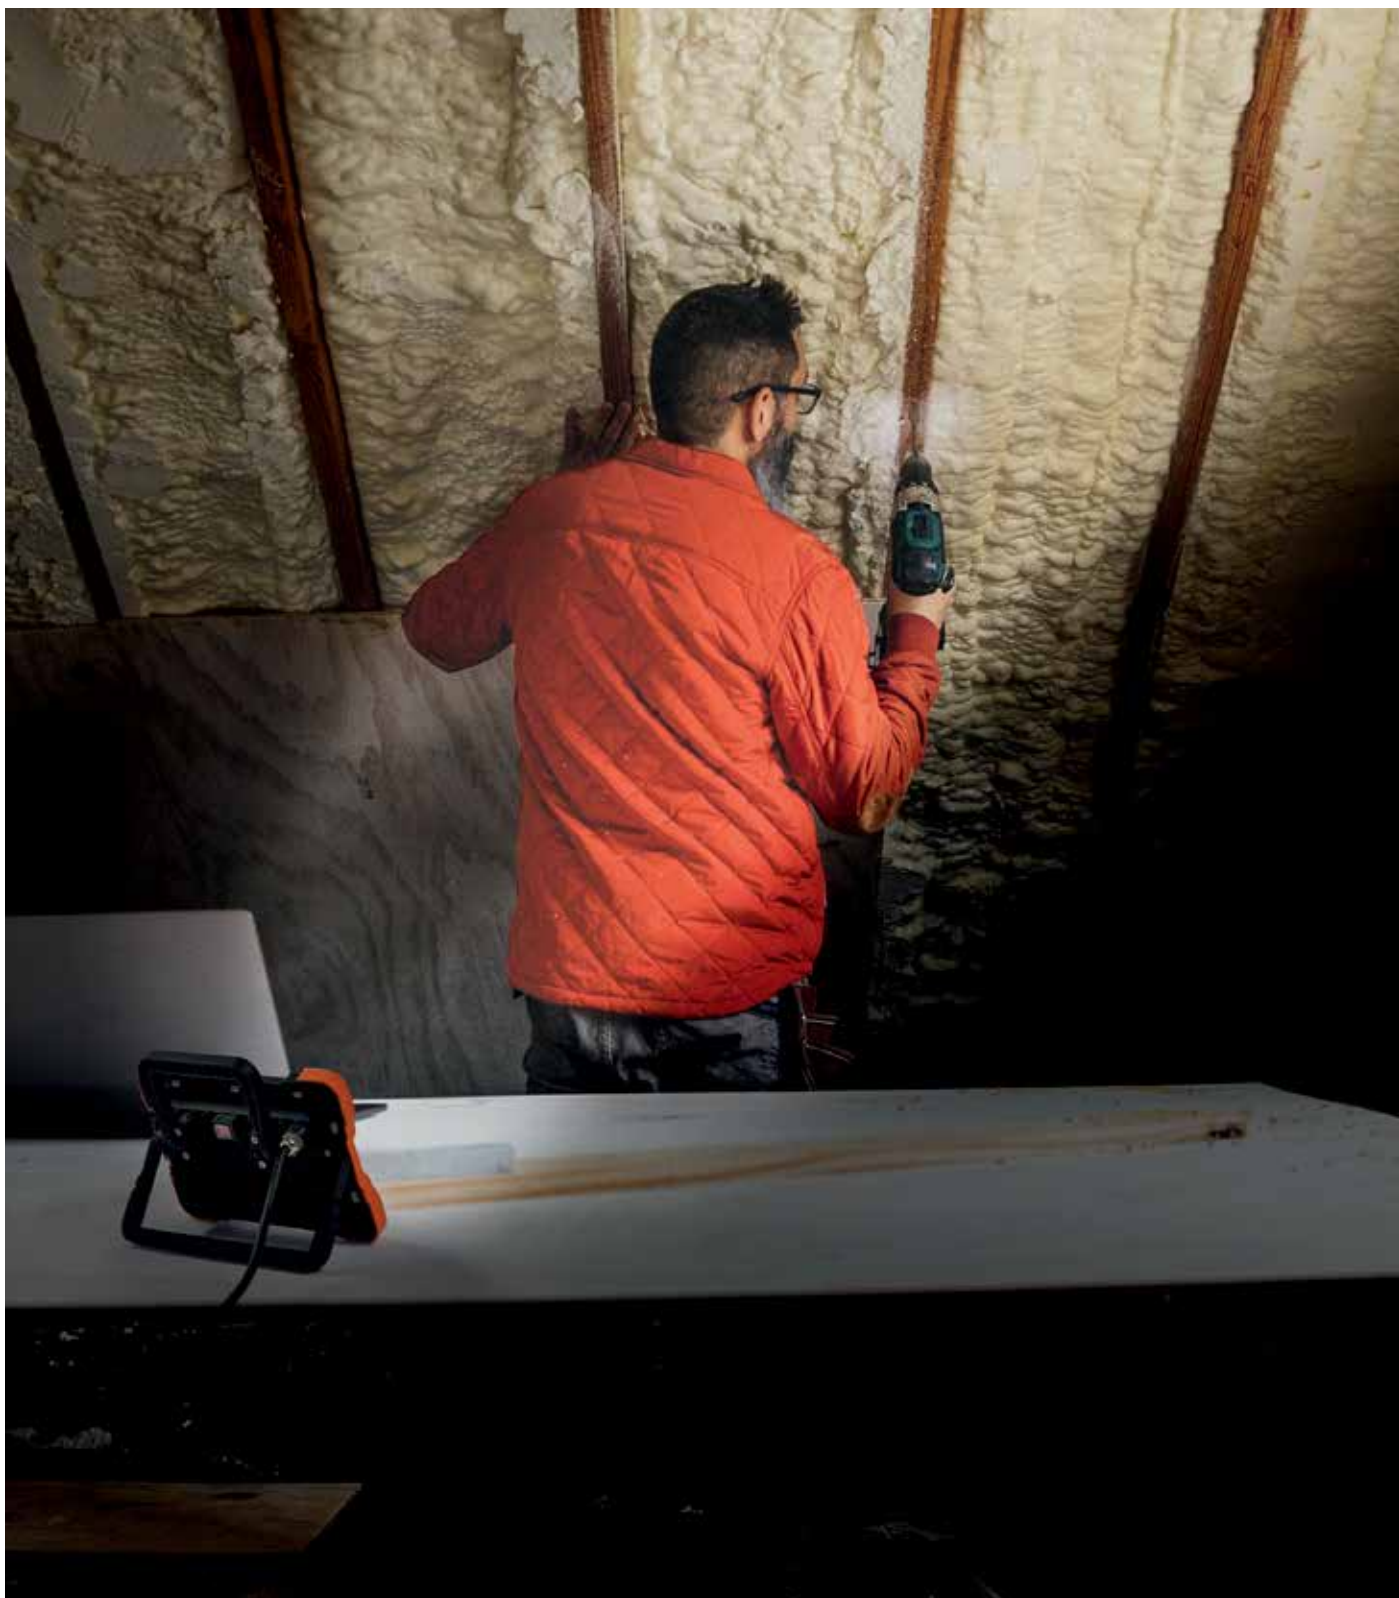



1  
LED WORKLIGHT PANEL



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<sup>2</sup>	W	<sup>3</sup>	<sup>4</sup>	K	CRI	
LED WORKLIGHT PANEL	4058075576599	1	Orange	Aluminum/Plastic	15000	50.00	4000	4300	4000	≥80	110

Product name						
LED WORKLIGHT PANEL	IP20	15000	50.0	201.0	141.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® PRO FLOOD SENSOR**

HIGHLY EFFICIENT OUTDOOR WALL SENSOR SPOTLIGHT WITH WIDE BEAM ANGLE IN INNOVATIVE DESIGN





1  
ENDURA PRO FLOOD SENSOR  
27W 840 IP55 WT



2  
ENDURA PRO FLOOD SENSOR  
27W 840 IP55 DG



3  
ENDURA PRO FLOOD SENSOR  
15W 840 IP55 WT



4  
ENDURA PRO FLOOD SENSOR  
15W 840 IP55 DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI
ENDURA PRO FLOOD SENSOR 27W 840 IP55 WT	4058075228825	1	White	Plastic (PC)	50000	27.00	3000	3800	4000	≥80
ENDURA PRO FLOOD SENSOR 27W 840 IP55 DG	4058075228849	2	Dark	Plastic (PC)	30000	27.00	3000	3800	4000	≥80
ENDURA PRO FLOOD SENSOR 15W 840 IP55 WT	4058075228788	3	White	Plastic (PC)	30000	15.00	1500	1980	4000	≥80
ENDURA PRO FLOOD SENSOR 15W 840 IP55 DG	4058075228801	4	Dark	Plastic (PC)	50000	15.00	1500	1980	4000	≥80

Product name	100	IP	100000	l [mm]	b [mm]	h [mm]	4
ENDURA PRO FLOOD SENSOR 27W 840 IP55 WT	100	IP55	100000	201.0	56.0	225.0	4
ENDURA PRO FLOOD SENSOR 27W 840 IP55 DG	100	IP55	100000	201.0	56.0	225.0	4
ENDURA PRO FLOOD SENSOR 15W 840 IP55 WT	100	IP55	100000	151.0	56.0	205.0	6
ENDURA PRO FLOOD SENSOR 15W 840 IP55 DG	100	IP55	100000	151.0	56.0	205.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® GARDEN FLOOD** LED FLOODLIGHT WITH SPIKE







1  
ENDURA GARDEN Flood  
20 W 830 Spike



2  
ENDURA GARDEN Flood  
10 W 830 Spike



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	---

ENDURA GARDEN Flood 20 W 830 Spike	4058075206861	1	Dark gray	Aluminum	25 000	20.00	1 700	-	3 000	≥80	120
ENDURA GARDEN Flood 10 W 830 Spike	4058075206847	2	Dark gray	Aluminum	25 000	10.00	800	-	3 000	≥80	120

Product name	IP	l (mm)	w (mm)	h (mm)	mm
--------------	----	--------	--------	--------	----

ENDURA GARDEN Flood 20 W 830 Spike	IP65	100 000	44.0	133.0	323.0	8
ENDURA GARDEN Flood 10 W 830 Spike	IP65	100 000	44.0	108.0	292.0	8

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® FLOOD SOLAR**

SOLAR-POWERED LED FLOODLIGHTS WITH MOTION SENSOR  
AND INTELLIGENT LIGHTING CONTROL





1  
ENDURA FLOOD Solar  
10W 4000K



2  
ENDURA FLOOD Solar  
double Sensor



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	K	CRI	°	IP
--------------	------------	-----	-------	----------	-------------------	---	------------------------	---	-----	---	----

ENDURA FLOOD Solar 10W 4000K	4058075762350	1	Black	Metal	36000	10.00	1200	4000	80	95	IP65
ENDURA FLOOD Solar double Sensor	4058075576636	2	Dark gray	Plastic	25000	2.90	380	3000	≥80	110	IP44

Product name	t(h) <sup>2</sup>	l (mm)	b (mm)	h (mm)	Icons
--------------	-------------------	--------	--------	--------	-------

ENDURA FLOOD Solar 10W 4000K	36000	194.0	67.0	313.0	4
ENDURA FLOOD Solar double Sensor	12500	160.0	110.0	172.0	8

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser

## **ENDURA® STYLE SOLAR BOUQUET**

LED OUTDOOR LUMINAIRE FAMILY WITH INTEGRATED SOLAR MODULE





1  
ENDURA STYLE SOLAR BOUQUET Wall  
sensor stainless steel



2  
ENDURA STYLE SOLAR BOUQUET Wall  
sensor black



3  
ENDURA STYLE SOLAR BOUQUET  
50cm Post sensor stainless steel



4  
ENDURA STYLE SOLAR BOUQUET  
50cm Post sensor black



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
ENDURA STYLE SOLAR BOUQUET Wall sensor stainless steel	4058075564503	1	Steel	Aluminum	25 000	6.00	550	-	3000	>80	IP44
ENDURA STYLE SOLAR BOUQUET Wall sensor black	4058075564541	2	Dark gray	Aluminum	25 000	6.00	550	-	3000	>80	IP44
ENDURA STYLE SOLAR BOUQUET 50cm Post sensor stainless steel	4058075564527	3	Steel	Aluminum	25 000	6.00	550	-	3000	>80	IP44
ENDURA STYLE SOLAR BOUQUET 50cm Post sensor black	4058075564565	4	Dark gray	Aluminum	25 000	6.00	550	-	3000	>80	IP44

Product name	l (mm)	b (mm)	h (mm)	Weight	
ENDURA STYLE SOLAR BOUQUET Wall sensor stainless steel	12 500	180.0	150.0	365.0	4
ENDURA STYLE SOLAR BOUQUET Wall sensor black	12 500	180.0	150.0	365.0	4
ENDURA STYLE SOLAR BOUQUET 50cm Post sensor stainless steel	12 500	150.0	150.0	500.0	4
ENDURA STYLE SOLAR BOUQUET 50cm Post sensor black	12 500	150.0	150.0	500.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

**ENDURA® STYLE SOLAR SENSOR DOUBLE CIRCLE**  
STAINLESS STEEL WALL- AND BOLLARD LUMINAIRES WITH  
SOLAR PANEL AND SENSOR





1  
ENDURA STYLE Solar Sensor Wall  
Double Circle 6W ST



2  
ENDURA STYLE Solar Sensor Wall  
Double Circle 6W BK



3  
ENDURA STYLE Solar Sensor Post  
Double Circle 40CM 6W ST



4  
ENDURA STYLE Solar Sensor Post  
Double Circle 40CM 6W B



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
ENDURA STYLE Solar Sensor Wall Double Circle 6W ST	4058075392687	1	Steel	Stainless steel	50 000	6.00	400	-	3 000	≥80	IP44
ENDURA STYLE Solar Sensor Wall Double Circle 6W BK	4058075392724	2	Black	Stainless steel	50 000	6.00	400	-	3 000	≥80	IP44
ENDURA STYLE Solar Sensor Post Double Circle 40CM 6W ST	4058075392700	3	Steel	Stainless steel	50 000	6.00	400	-	3 000	≥80	IP44
ENDURA STYLE Solar Sensor Post Double Circle 40CM 6W BK	4058075392748	4	Black	Stainless steel	50 000	6.00	400	-	3 000	≥80	IP44

Product name	l (mm)	w (mm)	h (mm)	d (mm)	Weight (kg)	
ENDURA STYLE Solar Sensor Wall Double Circle 6W ST	12 500	185.0	178.0	220.0	-	4
ENDURA STYLE Solar Sensor Wall Double Circle 6W BK	12 500	185.0	178.0	220.0	-	4
ENDURA STYLE Solar Sensor Post Double Circle 40CM 6W ST	12 500	-	-	400.0	178.0	4
ENDURA STYLE Solar Sensor Post Double Circle 40CM 6W BK	12 500	-	-	400.0	178.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE SOLAR SENSOR WALL CIRCLE

SELF-POWERED SOLAR WALL LUMINAIRE WITH DAYLIGHT- AND MOTION SENSOR







1  
ENDURA STYLE Solar Sensor Wall Circle  
6W BK



Product name	GTIN (EAN)	Light No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
--------------	------------	-----------	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	----

ENDURA STYLE Solar Sensor Wall Circle 6W BK	4058075392762	1	Black	Plastic (PC + ABS)	50 000	6.00	400	-	3000	≥80	IP44
---	---------------	---	-------	--------------------	--------	------	-----	---	------	-----	------

Product name	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
--------------	-------------	------------	-------------	-------------

ENDURA STYLE Solar Sensor Wall Circle 6W BK	12 500	200.0	160.0	70.0	4
---	--------	-------	-------	------	---

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® GARDEN SOLAR SPOT WALL & SPIKE**

SOLAR-POWERED GARDEN SPOTLIGHTS WITH RGB FUNCTION –  
INCL. WALL MOUNT AND GROUND SPIKE





1  
ENDURA GARDEN SOLAR SPOT RGBW



Product name	GTIN (EAN)	LED No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
--------------	------------	---------	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	----

ENDURA GARDEN SOLAR SPOT RGBW	4058075564169	1	Dark gray	Plastic	25 000	0.50	55	-	3 000	≥80	IP44
-------------------------------	---------------	---	-----------	---------	--------	------	----	---	-------	-----	------

Product name	l (mm)	b (mm)	h (mm)	Weight
--------------	--------	--------	--------	--------

ENDURA GARDEN SOLAR SPOT RGBW	12 500	175.0	92.0	295.0	4
-------------------------------	--------	-------	------	-------	---

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE SOLAR OVAL WALL**











MODERN OUTDOOR WALL LUMINAIRES WITH ALUMINUM HOUSING, SOLAR PANEL AND MOTION SENSOR





1  
ENDURA STYLE SOLAR OVAL WALL SEN




Product name	GTIN (EAN)	 No.	 MATERIAL	 t[h] <sup>2</sup>	 W	 lm <sup>3</sup> OUTPUT	 lm <sup>4</sup> LIGHT SOURCE	 K	 CRI	 IP	 l [mm]
ENDURA STYLE SOLAR OVAL WALL SEN	4058075766242	1	Aluminum	25 000	6.00	540	550	4000	≥80	IP44	340.0
ENDURA STYLE SOLAR OVAL S WALL SEN	4058075766266	1	Aluminum	25 000	4.00	380	400	3000	≥80	IP44	200.0

Product name	 b [mm]	 h [mm]	
ENDURA STYLE SOLAR OVAL WALL SEN	125.0	60.0	4
ENDURA STYLE SOLAR OVAL S WALL SEN	124.0	45.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE SOLAR LUNAR**

ATTRACTIVE OUTDOOR WALL LUMINAIRE WITH SWIVEL LUMINAIRE HEAD, SOLAR PANEL AND MOTION SENSOR

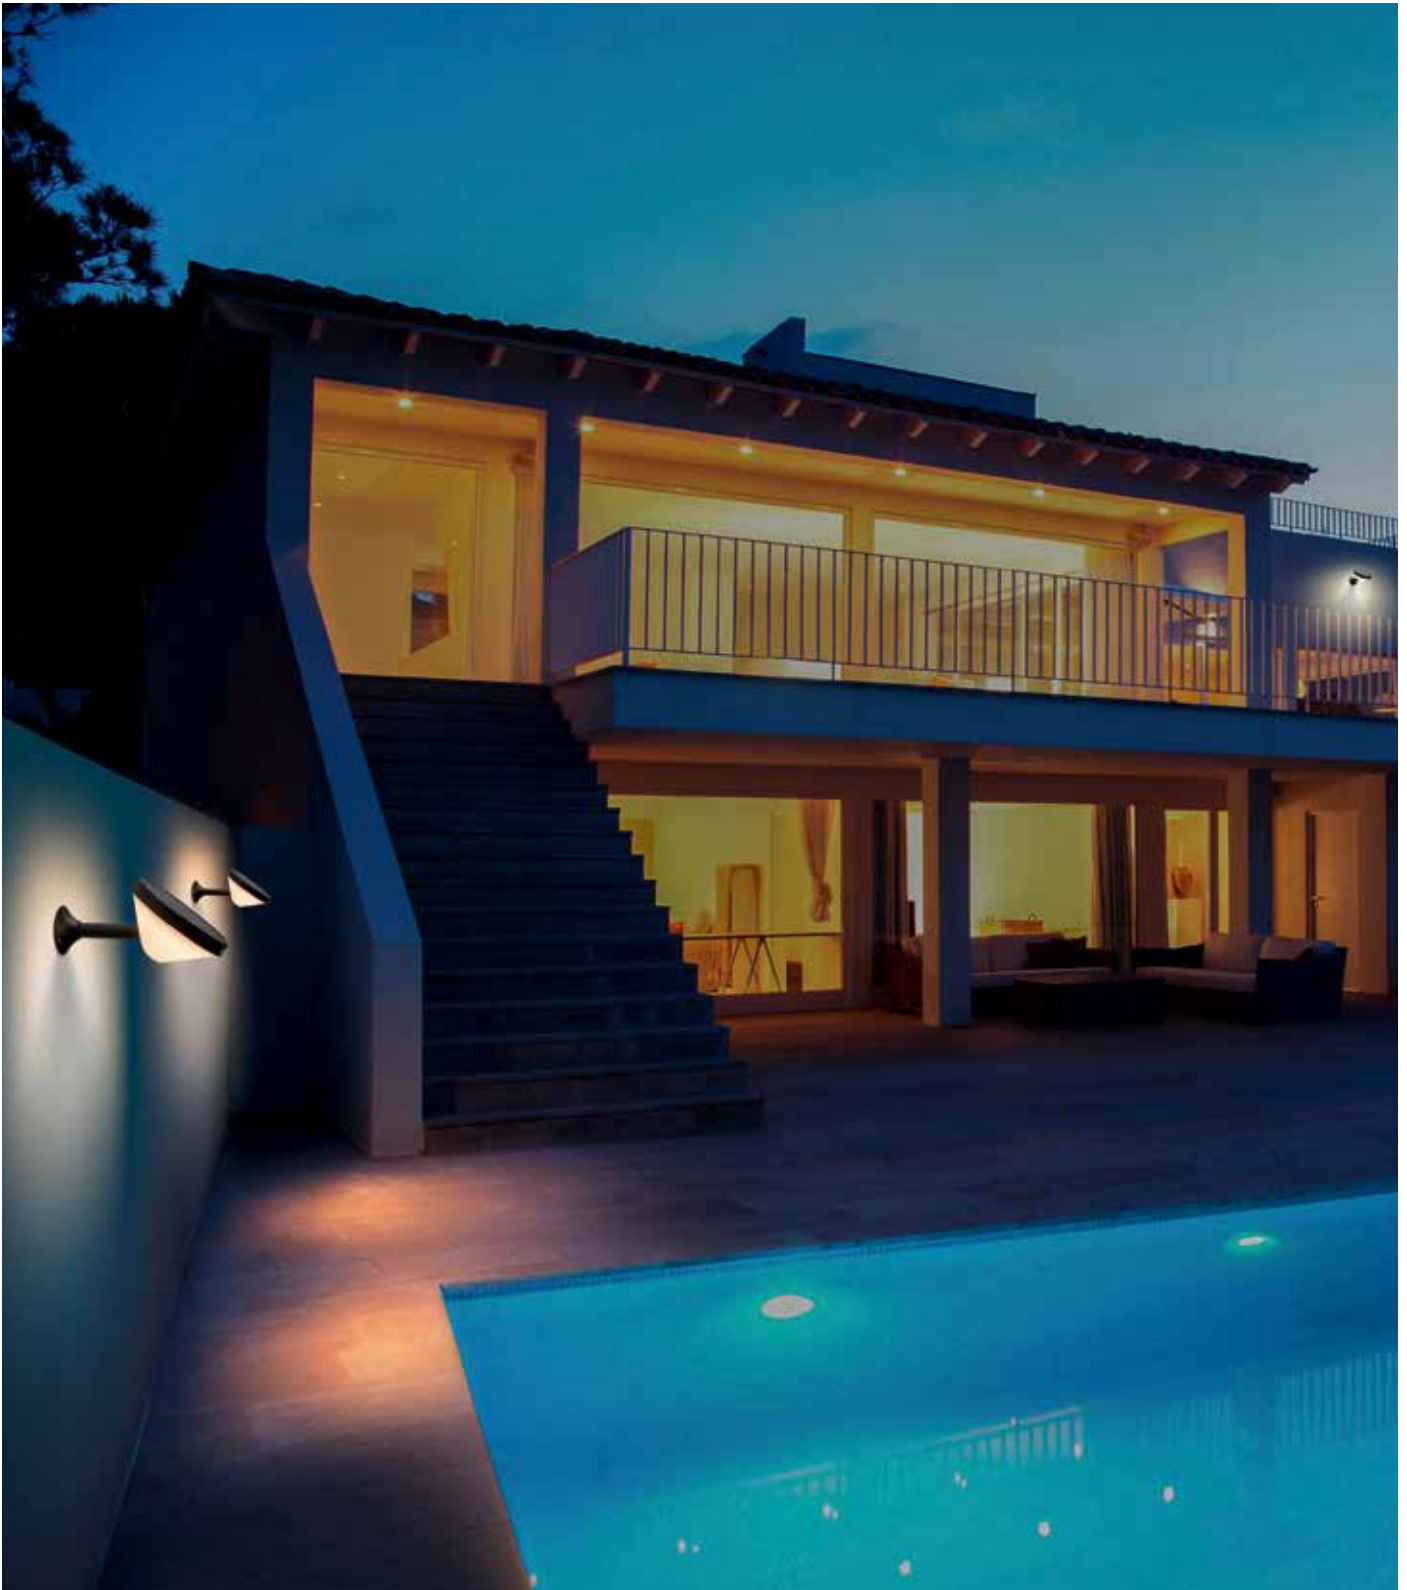



1  
ENDURA STYLE SOLAR LUNAR WALL SEN

LED
IP44
HEAD ADJUSTABLE
SOLAR
WARM LIGHT
5Y PARTIAL GUARANTEE

Product name
GTIN (EAN)
No.
MATERIAL
t(h)
W
lm OUTPUT
lm LIGHT SOURCE
K
CRI
IP
l (mm)

ENDURA STYLE SOLAR LUNAR WALL SEN	4058075766280	1	Plastic (ABS)	25000	4.50	300	500	3000	≥80	IP44	160.0
-----------------------------------	---------------	---	---------------	-------	------	-----	-----	------	-----	------	-------


Product name
b (mm)
h (mm)
d (mm)
Quantity

ENDURA STYLE SOLAR LUNAR WALL SEN	226.5	83.2	160.0	4
-----------------------------------	-------	------	-------	---

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE SOLAR TOSSA**

CLASSIC OUTDOOR WALL LUMINAIRE WITH ALUMINUM HOUSING, SOLAR PANEL AND MOTION SENSOR

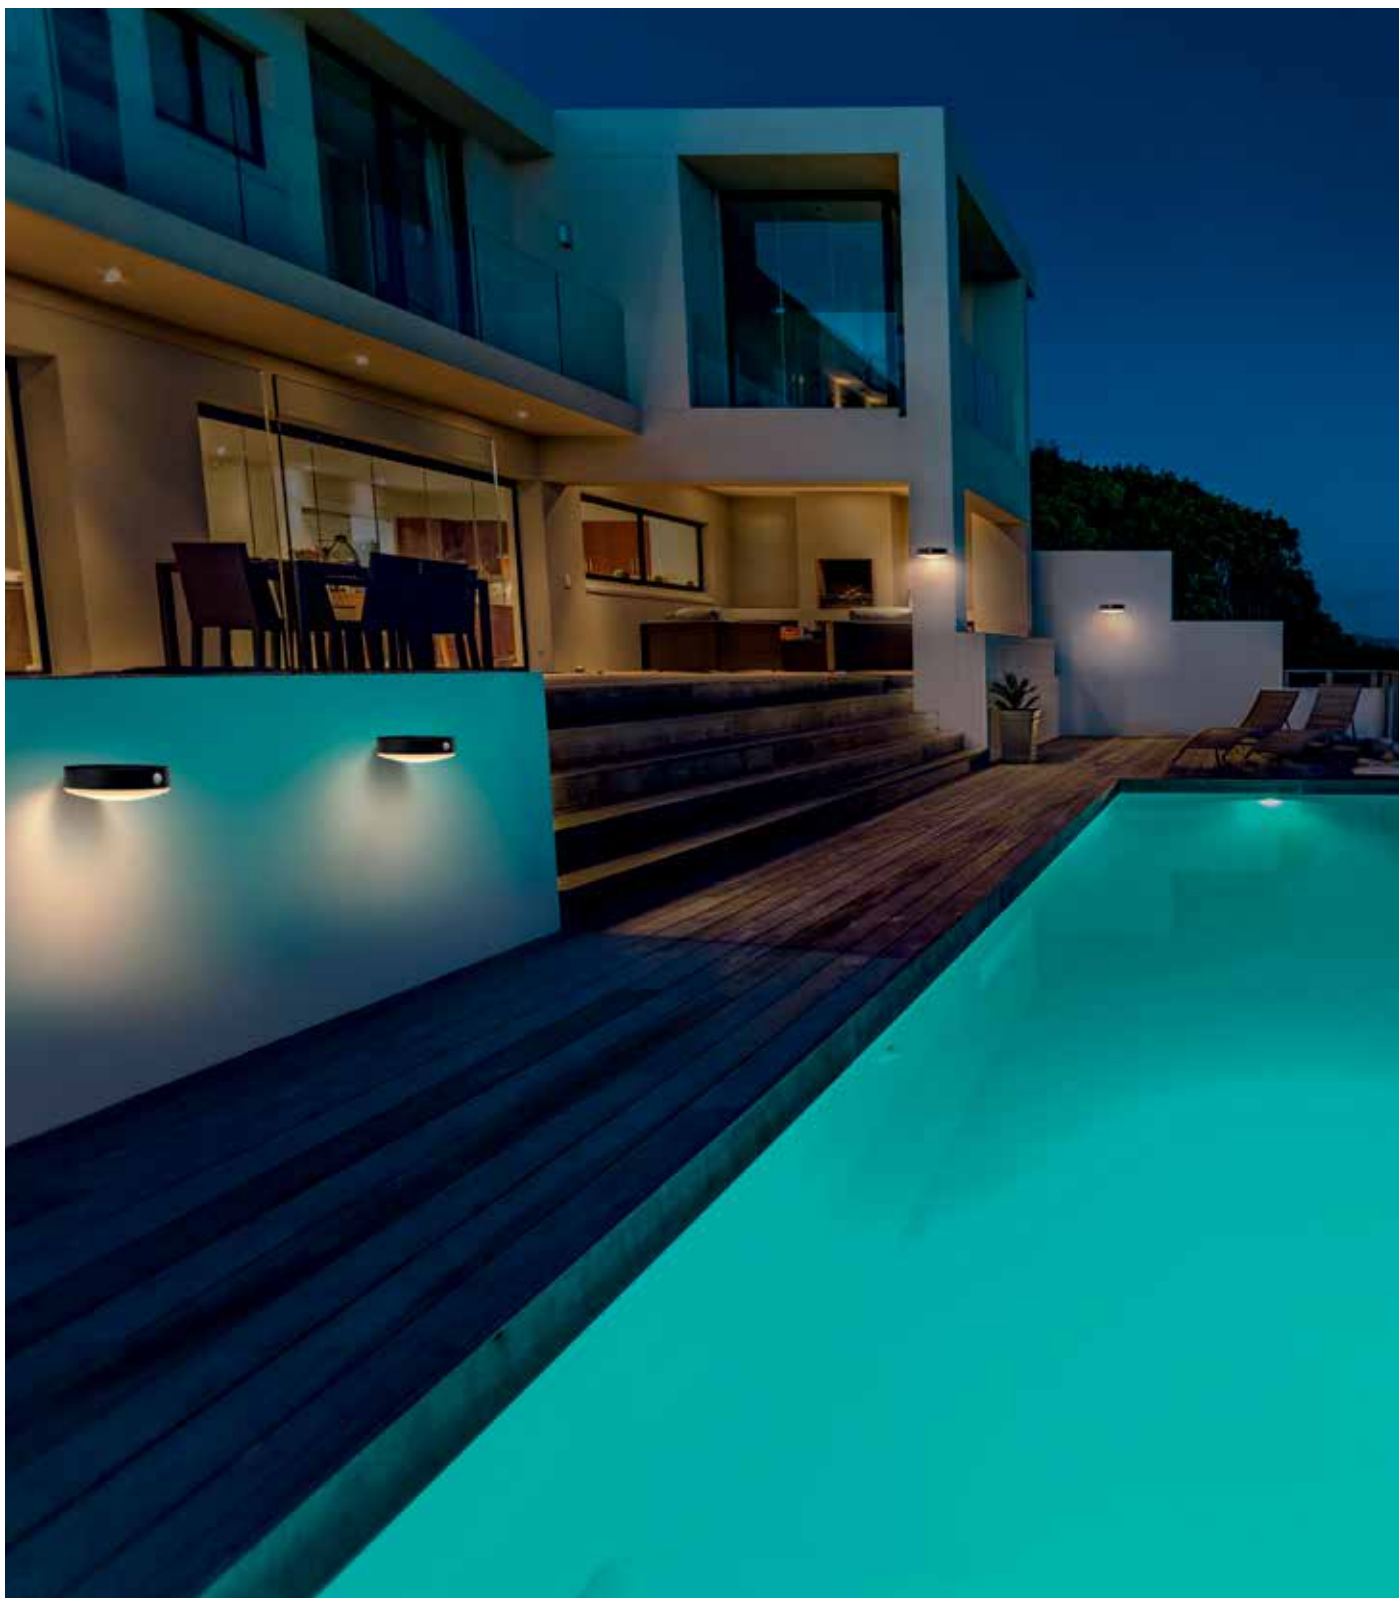





1  
ENDURA STYLE SOLAR TOSSA WALL SEN



LED
IP44
ALU


WARM LIGHT
5Y<sup>1</sup> PARTIAL GUARANTEE

Product name	GTIN (EAN)		MATERIAL	t[h] <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP	
ENDURA STYLE SOLAR TOSSA WALL SEN	4058075766303	1	Aluminum	25000	6.00	500	650	3000	>80	IP44	160.0

Product name			
ENDURA STYLE SOLAR TOSSA WALL SEN	173.0	50.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI FLOOD CAMERA

SMART OUTDOOR FLOODLIGHTS WITH CAMERA,  
INTERCOM AND ALARM FUNCTION





1  
SMART+ WIFI OUTDOOR FLOOD CAMERA CONTROL DG

works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | EASY MOUNTING | DIM | WARM LIGHT | LEDVANCE 1 | 3 year guarantee

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°C
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	----

SMART+ WIFI OUTDOOR FLOOD CAMERA CONTROL DG	4058075564626	1	Dark gray	Aluminum	25 000	23.00	2 000	2 580	3 000	>80	200
---	---------------	---	-----------	----------	--------	-------	-------	-------	-------	-----	-----

Product name	IP	l (mm)	b (mm)	h (mm)	4
--------------	----	--------	--------	--------	---

SMART+ WIFI OUTDOOR FLOOD CAMERA CONTROL DG	IP44	12 500	1	200.0	197.0	262.0	4
---	------	--------	---	-------	-------	-------	---

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART<sup>+</sup> WIFI FLOOD

EXTREMELY LOW-PROFILE AND ROBUST FLOODLIGHTS IN DIFFERENT SIZES – ALSO AVAILABLE WITH RGB FUNCTION





1  
SMART+ WIFI FLOOD  
50W



2  
SMART+ WIFI FLOOD  
30W



3  
SMART+ WIFI FLOOD  
20W



4  
SMART+ WIFI FLOOD  
10W



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
SMART+ WIFI FLOOD 50 W	4058075474666	1	Dark gray	Aluminum	30 000	50.00	4 000	-	3 000	≥80	-
SMART+ WIFI FLOOD 30W	4058075474642	2	Dark gray	Aluminum	30 000	30.00	2 400	-	3 000	≥80	-
SMART+ WIFI FLOOD 20W	4058075474628	3	Dark gray	Aluminum	30 000	20.00	1 600	-	3 000	≥80	-
SMART+ WIFI FLOOD 10W	4058075474604	4	Dark gray	Aluminum	30 000	10.00	800	-	3 000	≥80	100

Product name	IP	l (mm)	b (mm)	h (mm)	mm	
SMART+ WIFI FLOOD 50 W	IP65	30 000	237.0	200.0	36.0	8
SMART+ WIFI FLOOD 30W	IP65	30 000	209.0	168.0	30.0	12
SMART+ WIFI FLOOD 20W	IP65	30 000	152.0	125.0	28.0	12
SMART+ WIFI FLOOD 10W	IP65	30 000	152.0	125.0	28.0	12

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART<sup>+</sup> WIFI ROUND CAMERA

SMART OUTDOOR WALL LUMINAIRE WITH CAMERA, INTERCOM AND ALARM FUNCTION FOR ENTRANCE AREAS





1  
SMART+ WIFI OUTDOOR ROUND CAMERA  
DG

works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | SWITCH ON/OFF | EASY MOUNTING | SENSOR | DIM | WARM LIGHT | LEDVANCE 3 year guarantee |


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	$t_{90}$ <sup>2</sup>	W	$l_m$ <sup>3</sup> OUTPUT	$l_m$ <sup>4</sup> LIGHT SOURCE	K	CRI	
SMART+ WIFI OUTDOOR ROUND CAMERA DG	4058075564480	1	Dark gray	Plastic	25 000	15.00	950	1350	3 000	≥80	120

Product name	IP		$l$ <sub>(mm)</sub>	$b$ <sub>(mm)</sub>	$h$ <sub>(mm)</sub>	$\varnothing$ <sub>(mm)</sub>	
SMART+ WIFI OUTDOOR ROUND CAMERA DG	IP44	12 500	105.0	-	105.0	180.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI WALL CAMERA

SMART OUTDOOR WALL LUMINAIRES WITH CAMERA, INTERCOM AND ALARM FUNCTION FOR FACADE LIGHTING

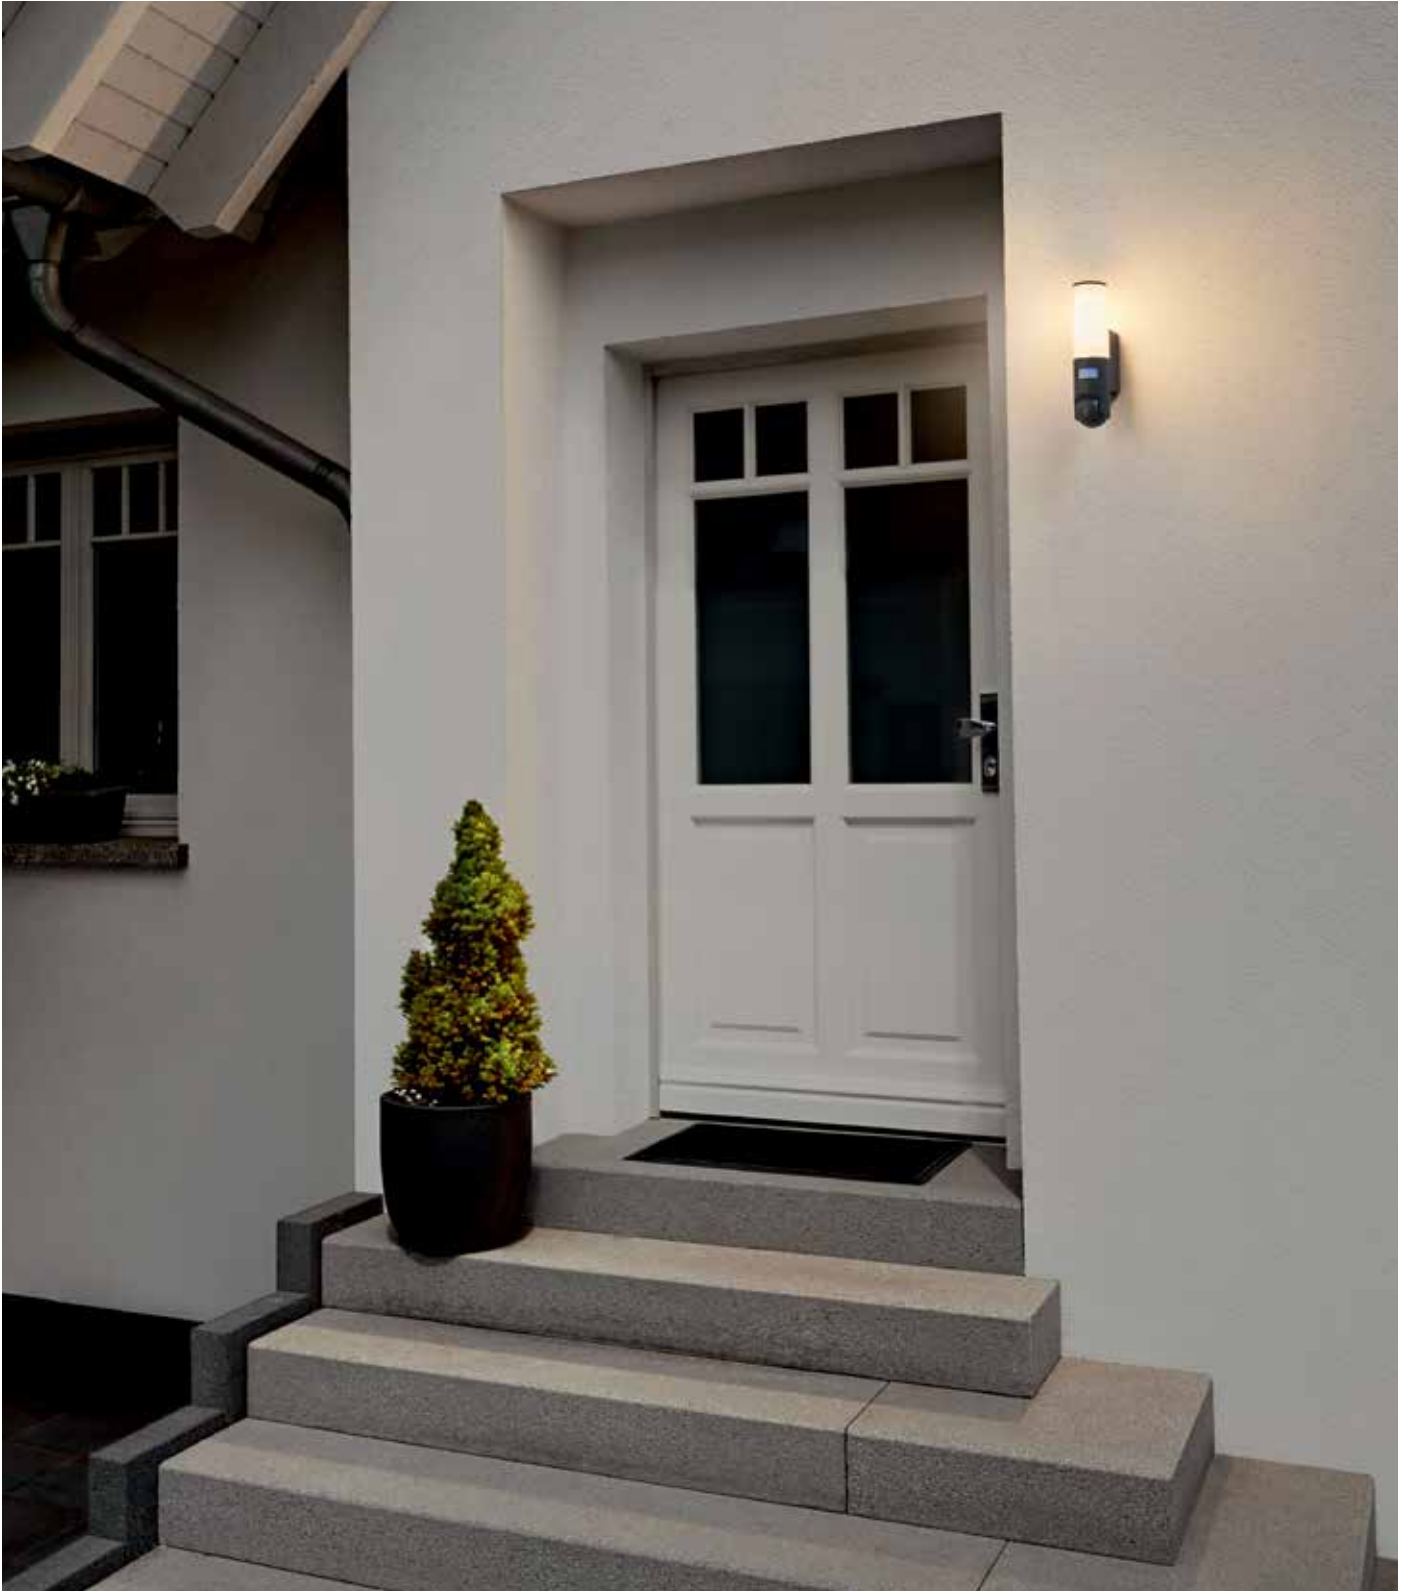





1  
SMART+ WIFI OUTDOOR WALL CAMERA CONTROL DG

works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | SWITCH ON/OFF | EASY MOUNTING | SENSOR | DIM | WARM LIGHT | LEDVANCE 3 year guarantee |

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	$t_{90}$ <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	
--------------	------------	-----	-------	----------	-----------------------	---	------------------------	------------------------------	---	-----	--

SMART+ WIFI OUTDOOR WALL CAMERA CONTROL DG	4058075564602	1	Dark	Plastic	25 000	16.00	900	1750	3 000	>80	208
--	---------------	---	------	---------	--------	-------	-----	------	-------	-----	-----

Product name	IP		$l$ <sub>(mm)</sub>	$b$ <sub>(mm)</sub>	$h$ <sub>(mm)</sub>	
--------------	----	--	---------------------	---------------------	---------------------	--

SMART+ WIFI OUTDOOR WALL CAMERA CONTROL DG	IP44	12 500	120.0	80.0	320.0	4
--	------	--------	-------	------	-------	---

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI CLOUD CAMERA

SMART OUTDOOR WALL LUMINAIRE WITH CAMERA AND INTERCOM FUNCTION





1  
SMART+ OUTD WIFI CLOUD CAM



Product name

GTIN (EAN)



COLOR

MATERIAL



K

CRI

IP



SMART+ OUTD WIFI CLOUD CAM

4058075763401

1

White

Plastic (PC)

900

1400

3000

≥80

IP44

2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>3</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI GLOBE E27 CAMERA

SMART OUTDOOR WALL LUMINAIRE WITH AUTO-SWIVEL CAMERA, INTERCOM FUNCTION AND E27 BASE





1  
SMART+ WIFI GLOBE E27 CAMERA




Product name	GTIN (EAN)	No.	MATERIAL	IP	l [mm]	b [mm]	h [mm]	d [mm]	
SMART+ WIFI GLOBE E27 CAMERA	4058075763425	1	Plastic (PC + Glass)	IP44	197.5	311.0	314.0	175.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## SMART+ WIFI MULTISPOT CAMERA

SMART OUTDOOR WALL SPOTLIGHT WITH CAMERA, INTERCOM FUNCTION AND TWO ADJUSTABLE LUMINAIRE HEADS

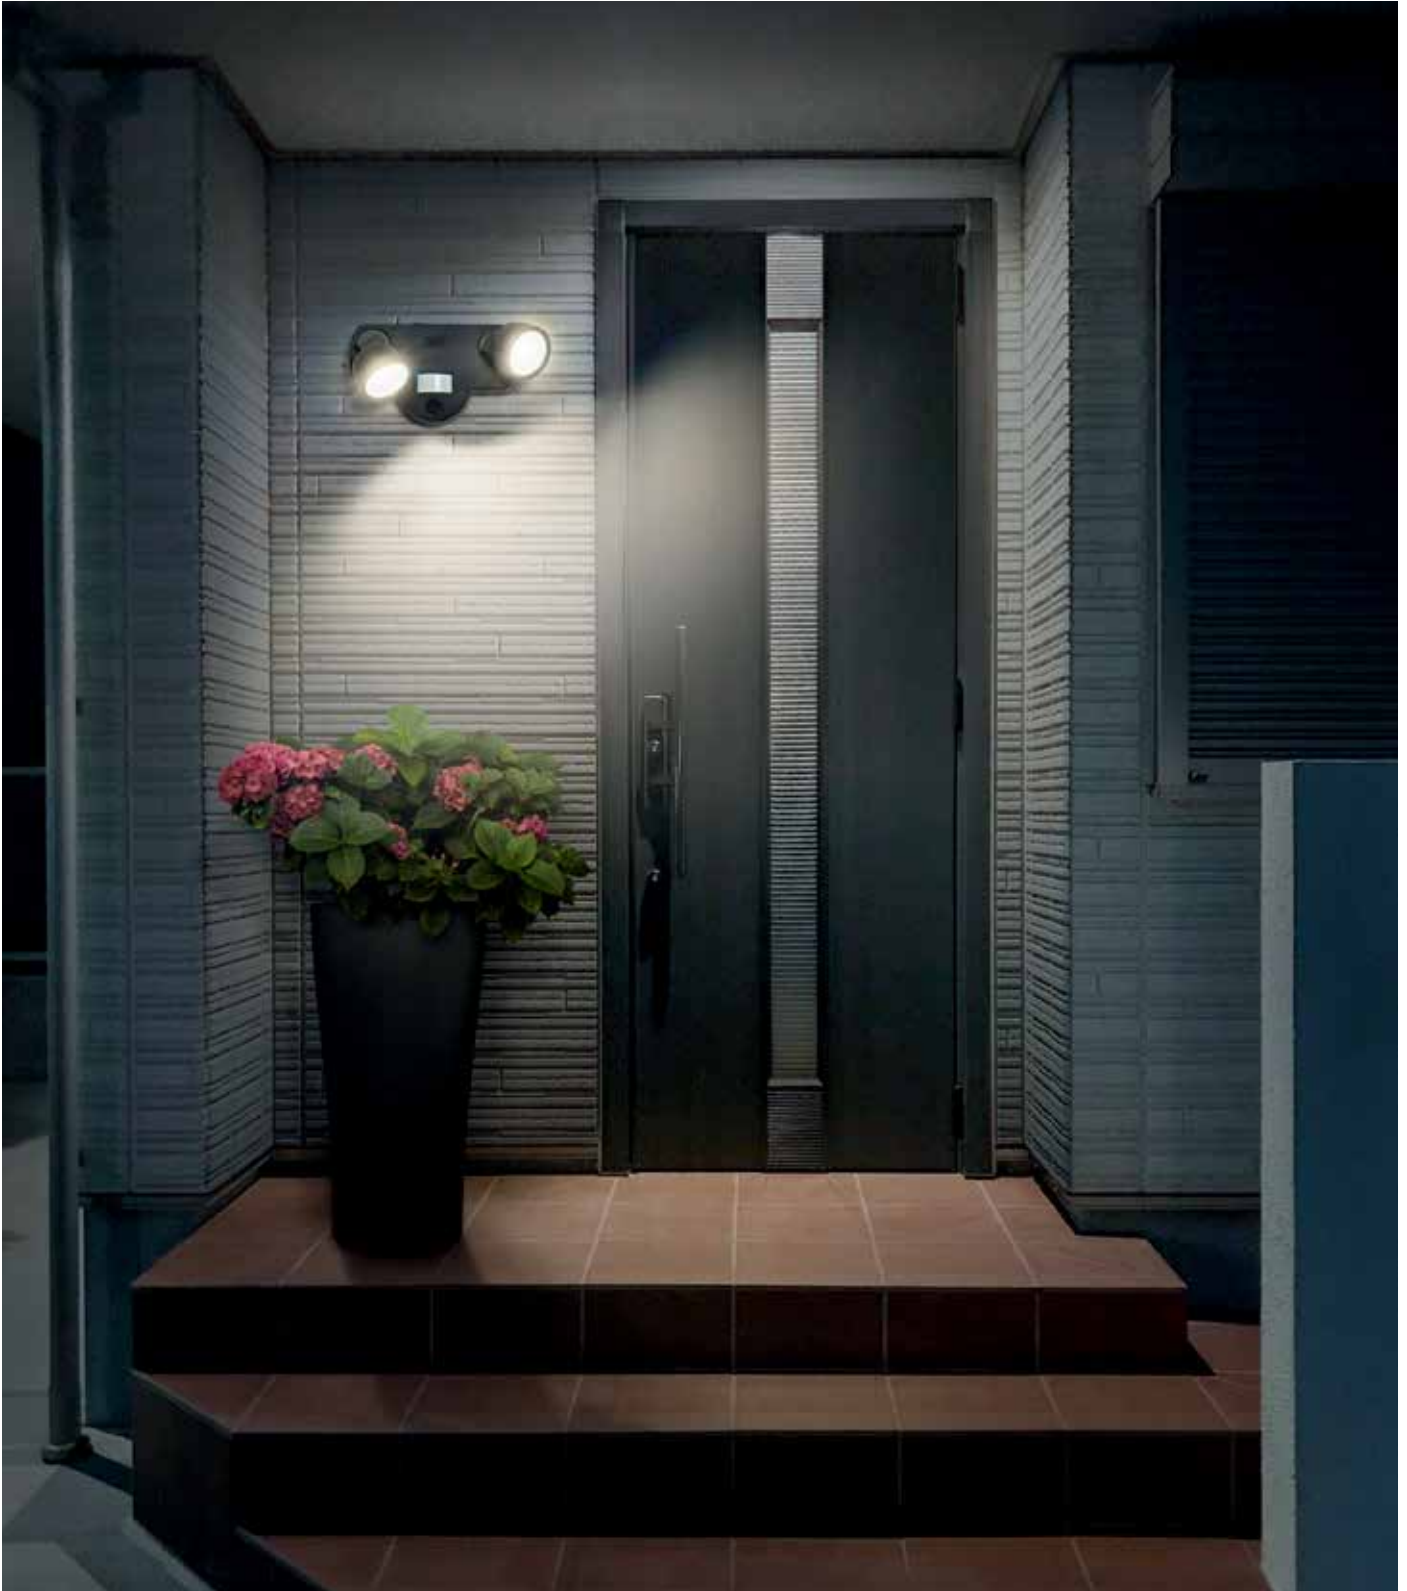



1  
SMART+ WIFI MULTISPOT CAMERA



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | WIFI SMART+ | EASY MOUNTING | IP44 | WARM LIGHT | LEDVANCE 3 year guarantee


Product name	GTIN (EAN)	No.	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
SMART+ WIFI MULTISPOT CAMERA	4058075763487	1	Aluminium/Plastic (ABS)	30 000	16.00	900	1720	3000	>80	85

Product name	IP	l (mm)	b (mm)	h (mm)	4	
SMART+ WIFI MULTISPOT CAMERA	IP44	100 000	250.0	130.0	135.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **SMART+ WIFI CIRCLE CAMERA CONTROL WALL & CEILING**

SMART OUTDOOR WALL AND CEILING LUMINAIRE WITH  
AUTO-SWIVEL CAMERA AND INTERCOM FUNCTION

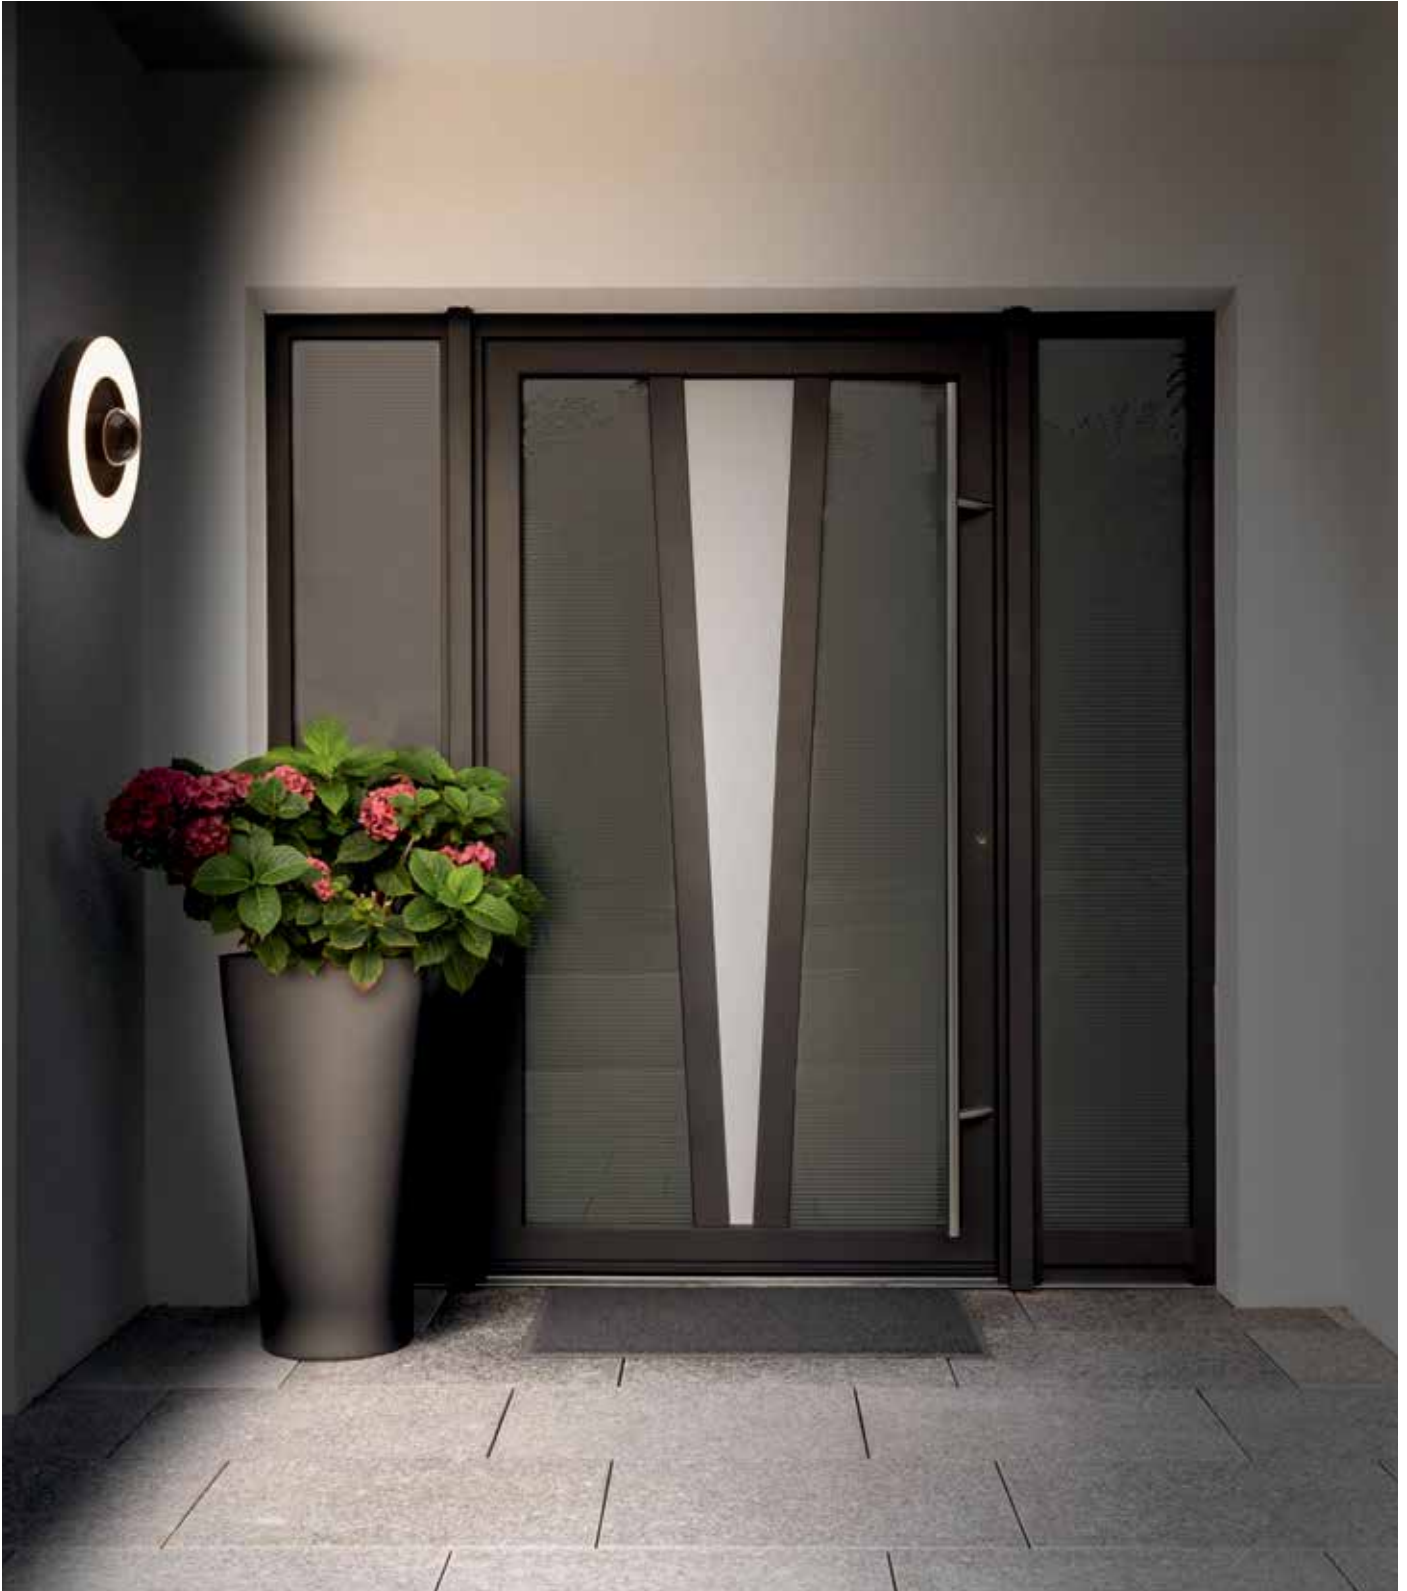





1  
SMART+ WIFI CIRCLE CAMERA CONTROL  
WALL & CEILING

works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | SMART+ | IP 44 | WARM LIGHT | LEDVANCE 3 year guarantee

Product name	GTIN (EAN)	No.	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°	IP
SMART+ WIFI CIRCLE CAMERA CONTROL WALL & CEILING	4058075763500	1	Plastic (ABS)	30000	22.00	1600	2450	3000	>80	112	IP44

Product name	h (mm)	d (mm)	Quantity
SMART+ WIFI CIRCLE CAMERA CONTROL WALL & CEILING	112.0	280.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI ENTRANCE CAMERA

SMART HOUSE NUMBER LUMINAIRE WITH CAMERA AND INTERCOM FUNCTION





1  
SMART+ WIFI ENTRANCE CAMERA

works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | EASY MOUNTING | IP44 | WARM LIGHT | LEDVANCE 3 year guarantee

Product name	GTIN (EAN)	No.	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°	IP
SMART+ WIFI ENTRANCE CAMERA	4058075763524	1	Plastic (ABS)	30000	22.00	1500	2550	3000	>80	117	IP44

Product name	Quantity	h (mm)	b (mm)	l (mm)	W (mm)
SMART+ WIFI ENTRANCE CAMERA	100 000	180.0	73.0	280.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **SMART<sup>+</sup> WIFI TABLEFRAME WITH USB POWERBANK**

MOBILE OUTDOOR TABLE OR FLOOR LAMP WITH RGBW FUNCTION  
– RECHARGEABLE VIA USB AND USABLE AS A POWER BANK





1  
SMART+ WIFI OUTDOOR TABLEFRAME  
POWERBANK Dark grey



2  
SMART+ WIFI OUTDOOR TABLEFRAME  
POWERBANK MAXI



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | SWITCH ON/OFF | USB | DIM | COLOR | WARM LIGHT | LEDVANCE 3 year guarantee |

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	K	CRI	°	IP
--------------	------------	-----	-------	----------	-------------------	---	------------------------	---	-----	---	----

SMART+ WIFI OUTDOOR TABLEFRAME POWERBANK	4058075564466	1	Dark gray	Aluminum	25 000	5.00	270	3000	≥80	360	IP44
SMART+ WIFI OUTDOOR TABLEFRAME POWERBANK MAXI	4058075763241	2	Dark gray	Aluminum	25 000	5.00	270	3000	≥80	360	IP44

Product name	l (mm)	b (mm)	h (mm)	
--------------	--------	--------	--------	--

SMART+ WIFI OUTDOOR TABLEFRAME POWERBANK Dark grey	12 500	120.0	120.0	203.0	4
SMART+ WIFI OUTDOOR TABLEFRAME POWERBANK MAXI Dark grey	12 500	140.0	140.0	263.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser

## SMART<sup>+</sup> WIFI PIPE

SMART OUTDOOR LUMINAIRE FAMILY WITH RGBW FUNCTION  
IN A SLIM PIPE LOOK





1 SMART+ WIFI OUTDOOR PIPE Wall



2 SMART+ WIFI OUTDOOR PIPE 80cm Post



3 SMART+ WIFI OUTDOOR PIPE 50cm Post




Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
SMART+ WIFI OUTDOOR PIPE Wall	4058075564183	1	Dark gray	Aluminum	25 000	10.00	380	850	3 000	≥80	270
SMART+ WIFI OUTDOOR PIPE 80CM Post	4058075564220	2	Dark gray	Stainless Steel	25 000	10.00	380	850	3 000	≥80	270
SMART+ WIFI OUTDOOR PIPE 50CM Post	4058075564206	3	Dark gray	Stainless Steel	25 000	10.00	380	850	3 000	≥80	270

Product name	IP	l (mm)	b (mm)	h (mm)	d (mm)	⊞	
SMART+ WIFI OUTDOOR PIPE Wall	IP44	12 500	129.0	89.0	197.0	-	4
SMART+ WIFI OUTDOOR PIPE 80CM Post	IP44	12 500	-	-	800.0	89.0	2
SMART+ WIFI OUTDOOR PIPE 50CM Post	IP44	12 500	-	-	500.0	135.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART<sup>+</sup> WIFI CASCADE

SMART OUTDOOR LUMINAIRE FAMILY WITH RGBW FUNCTION  
IN AN EXTRAORDINARY DESIGN

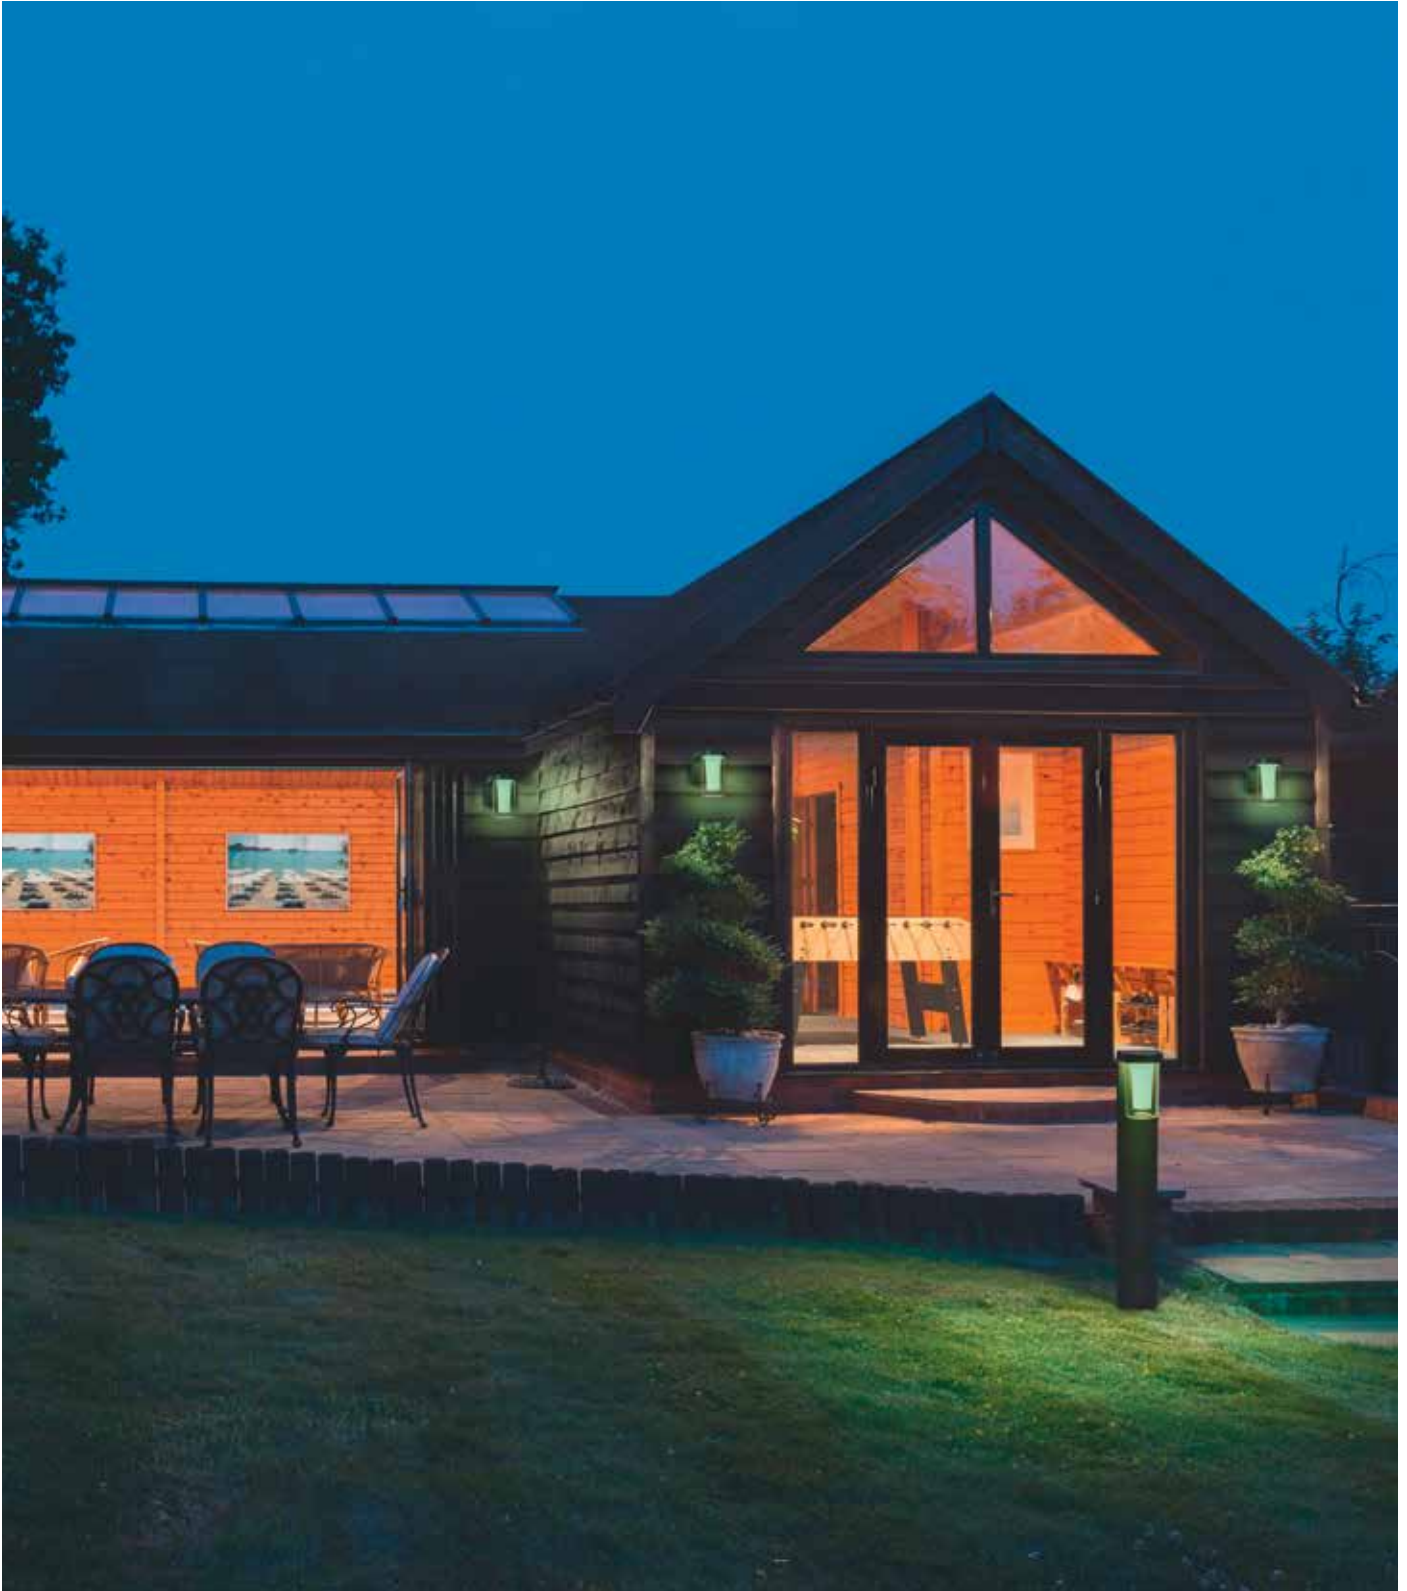





1  
SMART+ WIFI OUTDOOR CASCADE  
80cm Post



2  
SMART+ WIFI OUTDOOR CASCADE  
50cm Post



3  
SMART+ WIFI OUTDOOR CASCADE Wall



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | SWITCH ON/OFF | EASY MOUNTING | DIM | COLOR | WARM LIGHT | LEDVANCE 3 year guarantee |


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	
SMART+ WIFI OUTDOOR CASCADE 80CM Post	4058075564282	1	Dark gray	Aluminum	25 000	10.00	420	800	3 000	≥80	270
SMART+ WIFI OUTDOOR CASCADE 50CM Post	4058075564268	2	Dark gray	Aluminum	25 000	10.00	420	800	3 000	≥80	270
SMART+ WIFI OUTDOOR CASCADE Wall	4058075564244	3	Dark gray	Aluminum	25 000	10.00	420	800	3 000	≥80	270

Product name	IP		l (mm)	b (mm)	h (mm)	
SMART+ WIFI OUTDOOR CASCADE 80CM Post	IP44	12 500	200.0	160.0	800.0	2
SMART+ WIFI OUTDOOR CASCADE 50CM Post	IP44	12 500	200.0	160.0	500.0	2
SMART+ WIFI OUTDOOR CASCADE Wall	IP44	12 500	160.0	120.0	180.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI FLARE UPDOWN

SMART OUTDOOR LUMINAIRE FAMILY WITH RGBW FUNCTION –  
LIGHT OUTPUT UPWARD AND DOWNWARD

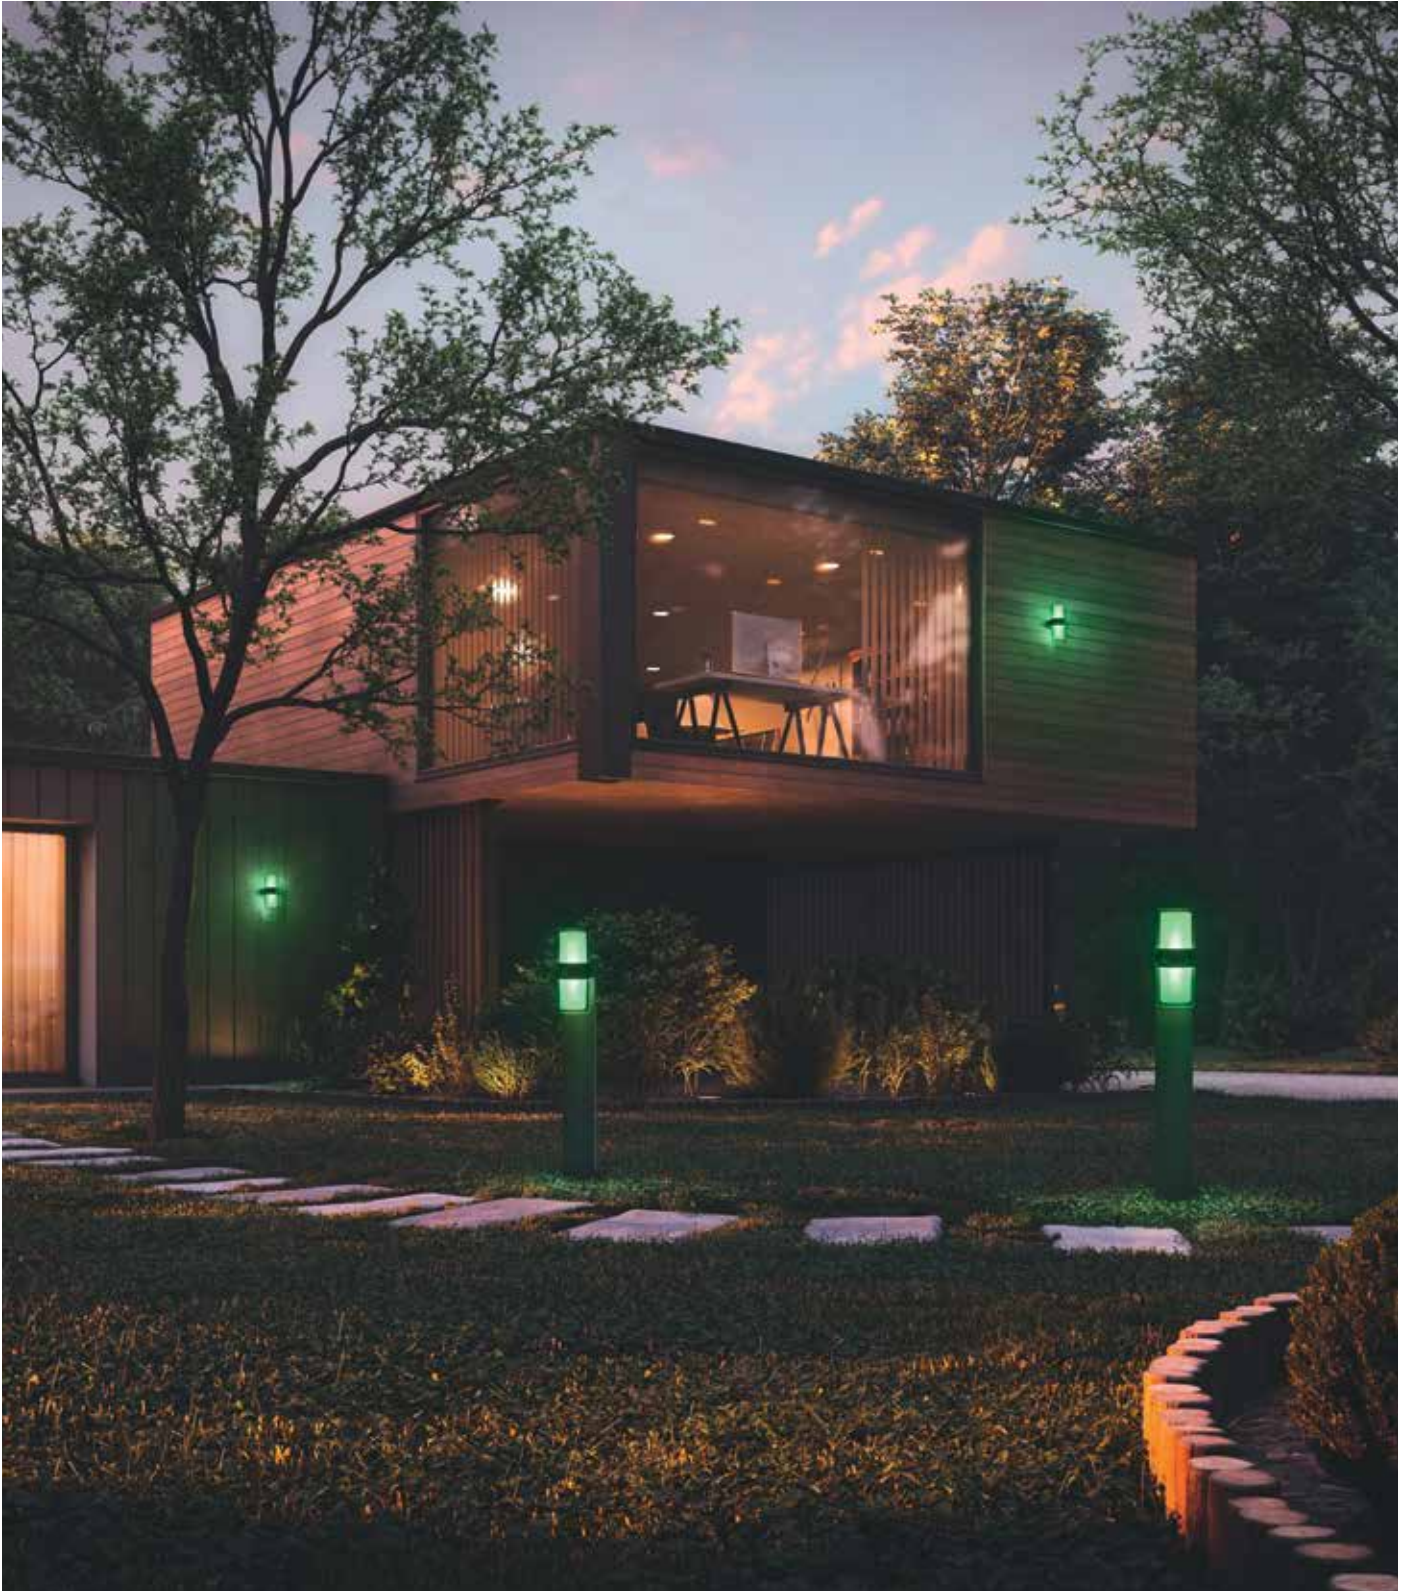



1 SMART+ WIFI OUTDOOR FLARE UPDOWN 80cm Post



2 SMART+ WIFI OUTDOOR FLARE UPDOWN 50Ccm Post



3 SMART+ WIFI OUTDOOR FLARE UPDOWN Wall



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | SWITCH ON/OFF | EASY MOUNTING | DIM | COLOR | WARM LIGHT | LEDVANCE 3 year guarantee |


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	
SMART+ WIFI OUTDOOR FLARE UPDOWN 80CM Post	4058075564343	1	Dark gray	Aluminum	25 000	14.00	1 000	1 350	3 000	≥80	320
SMART+ WIFI OUTDOOR FLARE UPDOWN 50CM Post	4058075564329	2	Dark gray	Aluminum	25 000	14.00	1 000	1 350	3 000	≥80	320
SMART+ WIFI OUTDOOR FLARE UPDOWN Wall	4058075564305	3	Dark gray	Aluminum	25 000	14.00	1 000	1 350	3 000	≥80	320

Product name	IP		l (mm)	b (mm)	h (mm)	
SMART+ WIFI OUTDOOR FLARE UPDOWN 80CM Post	IP44	12 500	194.0	144.0	800.0	2
SMART+ WIFI OUTDOOR FLARE UPDOWN 50CM Post	IP44	12 500	194.0	144.0	500.0	2
SMART+ WIFI OUTDOOR FLARE UPDOWN Wall	IP44	12 500	132.0	100.0	246.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI BRICK

SMART WALL LUMINAIRES WITH RGBW FUNCTION AND LIGHT OUTPUT UPWARD AND DOWNWARD

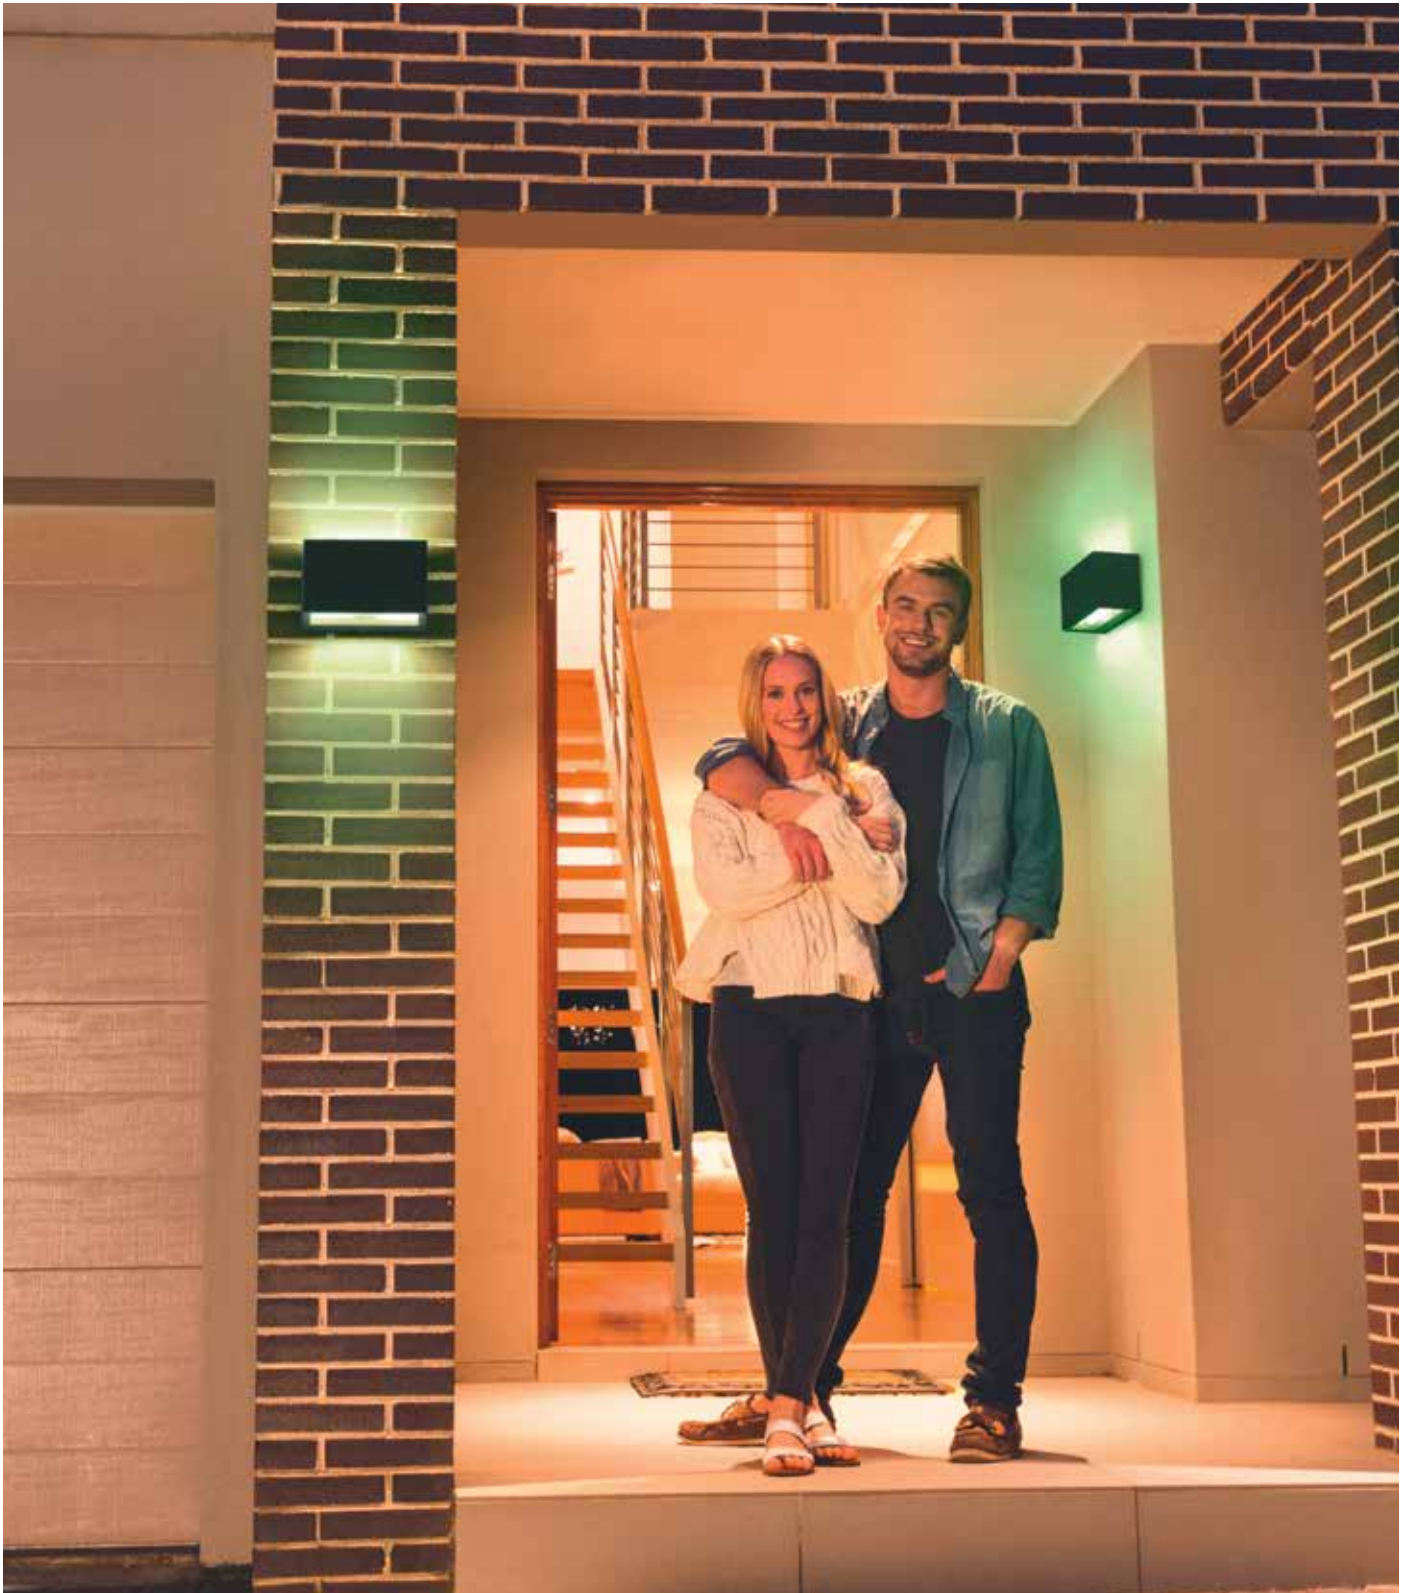



1 SMART+ WIFI OUTDOOR BRICK Wide Dark Grey



2 SMART+ WIFI OUTDOOR BRICK Dark grey



3 SMART+ WIFI OUTDOOR BRICK Stainless steel



4 SMART+ WIFI OUTDOOR BRICK Wide Stainless steel



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
SMART+ WIFI OUTDOOR BRICK Wide Dark Grey	4058075564404	1	Dark gray	Aluminum	25 000	14.00	600	1350	3000	≥80	290
SMART+ WIFI OUTDOOR BRICK Dark grey	4058075564367	2	Dark gray	Aluminum	25 000	14.00	550	1350	3000	≥80	275
SMART+ WIFI OUTDOOR BRICK Stainless steel	4058075564428	3	Steel	Aluminum/Steel	25 000	14.00	550	1350	3000	≥80	275
SMART+ WIFI OUTDOOR BRICK Wide Stainless steel	4058075564442	4	Steel	Aluminum/Steel	25 000	14.00	600	1350	3000	≥80	290

Product name	IP	l (mm)	b (mm)	h (mm)	4	
SMART+ WIFI OUTDOOR BRICK Wide Dark Grey	IP44	12500	145.0	75.0	85.0	4
SMART+ WIFI OUTDOOR BRICK Dark grey	IP44	12500	85.0	85.0	85.0	4
SMART+ WIFI OUTDOOR BRICK Stainless steel	IP44	12500	85.0	85.0	85.0	4
SMART+ WIFI OUTDOOR BRICK Wide Stainless steel	IP44	12500	75.0	145.0	85.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART<sup>+</sup> WIFI CUBE MULTICOLOR

STYLISH WALL AND BOLLARD LUMINAIRES WITH  
COLOR-CHANGING FUNCTION





1 SMART+ WIFI CUBE UpDown



2 SMART+ WIFI CUBE 80CM Post



3 SMART+ WIFI CUBE 50CM Post



4 SMART+ WIFI CUBE Wall



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | SWITCH ON/OFF | LED MODULE INTEGRATED | DIM | COLOR | WARM LIGHT | LEDVANCE 3 year guarantee

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t <sub>90</sub> <sup>2</sup>	W	lm <sub>OUT</sub> <sup>3</sup>	lm <sub>LS</sub> <sup>4</sup>	K	CRI
SMART+ WIFI CUBE UpDown	4058075478077	1	Dark gray	Aluminum	25 000	13.50	950	1 200	RGB, 3 000	≥80
SMART+ WIFI CUBE 80CM Post	4058075478176	2	Dark gray	Aluminum	25 000	9.50	500	800	RGB, 3 000	≥80
SMART+ WIFI CUBE 50CM Post	4058075478152	3	Dark gray	Aluminum	25 000	9.50	500	800	RGB, 3 000	≥80
SMART+ WIFI CUBE Wall	4058075478114	4	Dark gray	Aluminum	25 000	9.50	500	800	RGB, 3 000	≥80

Product name	h [mm]	b [mm]	l [mm]	IP	W	W	h [mm]
SMART+ WIFI CUBE UpDown	315	IP44	12 500	110.0	80.0	205.0	4
SMART+ WIFI CUBE 80CM Post	205	IP44	12 500	120.0	120.0	800.0	2
SMART+ WIFI CUBE 50CM Post	205	IP44	12 500	120.0	120.0	500.0	2
SMART+ WIFI CUBE Wall	205	IP44	12 500	110.0	80.0	116.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI CURVE MULTICOLOR

WALL LUMINAIRES IN AESTHETIC CURVED DESIGNS WITH COLOR-CHANGING FUNCTION







1  
SMART+ WIFI CURVE DG



2  
SMART+ WIFI CURVE SI



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | SWITCH ON/OFF | LED MODULE INTEGRATED | DIM | COLOR | WARM LIGHT | LEDVANCE 3 year guarantee |

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----

SMART+ WIFI CURVE DG	4058075478336	1	Dark gray	Aluminum	25 000	9.00	550	850	RGB, 3000	≥80
SMART+ WIFI CURVE SI	4058075478350	2	Silver	Aluminum	25 000	9.00	550	850	RGB, 3000	≥80

Product name		IP		l (mm)	b (mm)	h (mm)	
--------------	--	----	--	--------	--------	--------	--

SMART+ WIFI CURVE DG	260	IP44	12 500	93.0	100.0	248.0	4
SMART+ WIFI CURVE SI	260	IP44	12 500	93.0	100.0	248.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **SMART<sup>+</sup> WIFI LANTERN FLARE MULTICOLOR**

WALL AND BOLLARD LUMINAIRES IN FLARE DESIGNS WITH COLOR-CHANGING FUNCTION





1  
SMART+ WIFI FLARE Wall



2  
SMART+ WIFI FLARE  
60CM Post



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | SWITCH ON/OFF | LED MODULE INTEGRATED | DIM | COLOR | WARM LIGHT | LEDVANCE 3 year guarantee

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----

SMART+ WIFI FLARE Wall	4058075478275	1	Dark gray	Aluminum	25 000	7.50	320	570	RGB, 3000	≥80
SMART+ WIFI FLARE 60CM Post	4058075478299	2	Dark gray	Aluminum	25 000	7.50	320	570	RGB, 3000	≥80


Product name	△	IP	⏏	l (mm)	b (mm)	h (mm)	∅ (mm)	⊞
--------------	---	----	---	--------	--------	--------	--------	---

SMART+ WIFI FLARE Wall	230	IP44	12 500	98.0	66.0	331.0	-	4
SMART+ WIFI FLARE 60CM Post	230	IP44	12 500	-	-	604.0	110.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI ROTARY UPDOWN RGBW

SMART OUTDOOR WALL LIGHT WITH ROTATABLE ALUMINUM HOUSING

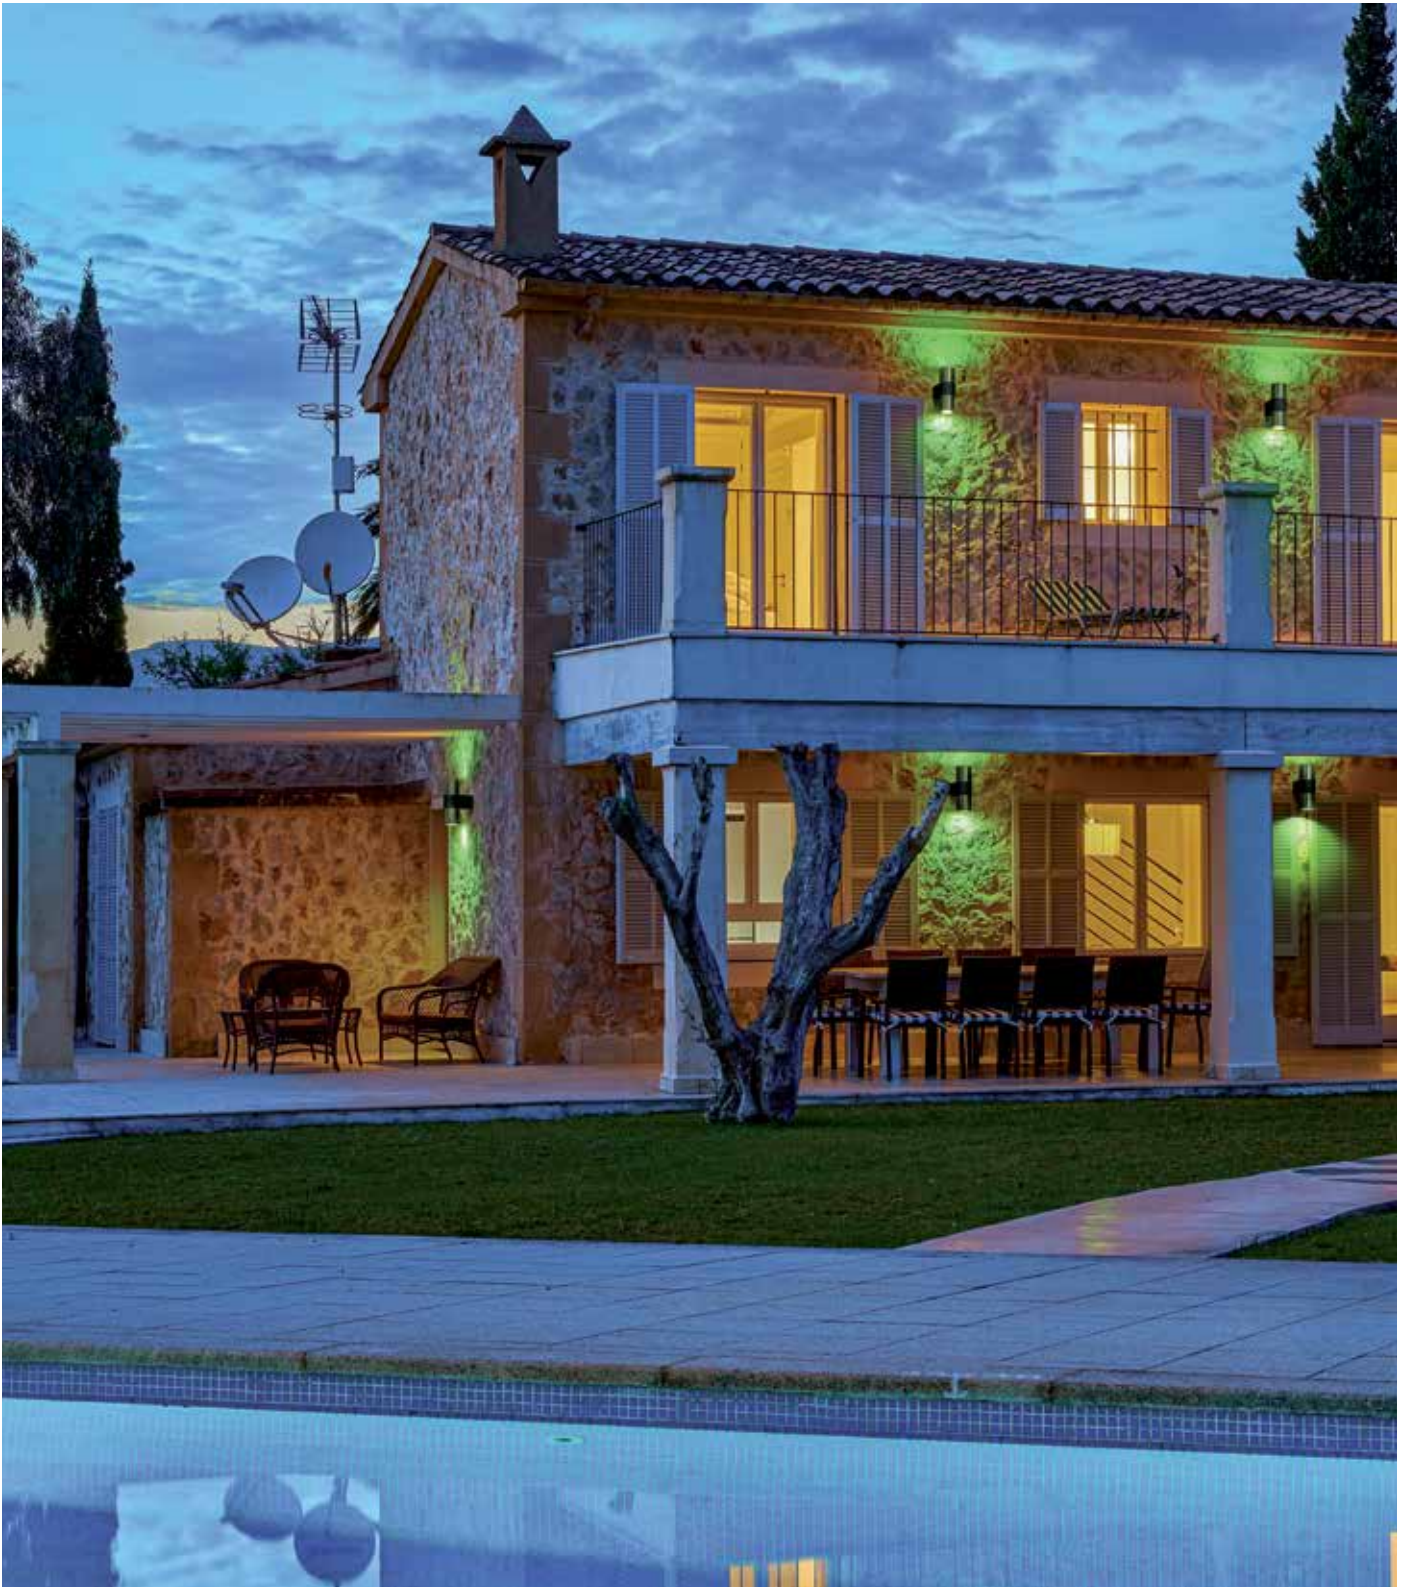



1  
SMART+ WIFI ROTARY UPDOWN RGBW



works with alexa | works with LEDVANCE app | works with Hey Google | Switch on/off | WIFI | COLOR | WARM LIGHT | HEAD ADJUSTABLE | DIM | LEDVANCE 3 JAHRE GARANTIE

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
SMART+ WIFI ROTARY UPDOWN RGBW	4058075763265	1	Dark	Aluminum/Steel	25 000	10.00	520	800	3 000	≥80	285

Product name	IP	l (mm)	b (mm)	h (mm)	∅ d (mm)	4	
SMART+ WIFI ROTARY UPDOWN RGBW	IP44	12 500	69.0	112.0	175.0	60.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **SMART+ WIFI BEAM ADJUST WALL RGBW**

SMART DIE-CAST ALUMINUM OUTDOOR WALL LIGHT WITH ADJUSTABLE BEAM ANGLE





1  
SMART+ WIFI BEAM ADJUST WALL RGBW



works with alexa | works with LEDVANCE app | works with Hey Google | Switch on/off | WIFI | WIFI SMART+ | COLOR | WARM COOL | USB | LEDVANCE 3 JAHRE GARANTIE


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI
SMART+ WIFI BEAM ADJUST WALL RGBW	4058075763463	1	Black	Aluminium Plastic (ABS)	30 000	8.00	320	750	3000..1	> 80

Product name	IP	h (mm)	b (mm)	h (mm)	4	
SMART+ WIFI BEAM ADJUST WALL RGBW	IP44	100 000	100.0	105.0	100.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI ECLIPSE

FAMILY OF SMART OUTDOOR LIGHTS WITH STAINLESS STEEL HOUSING IN MINIMALIST DESIGN

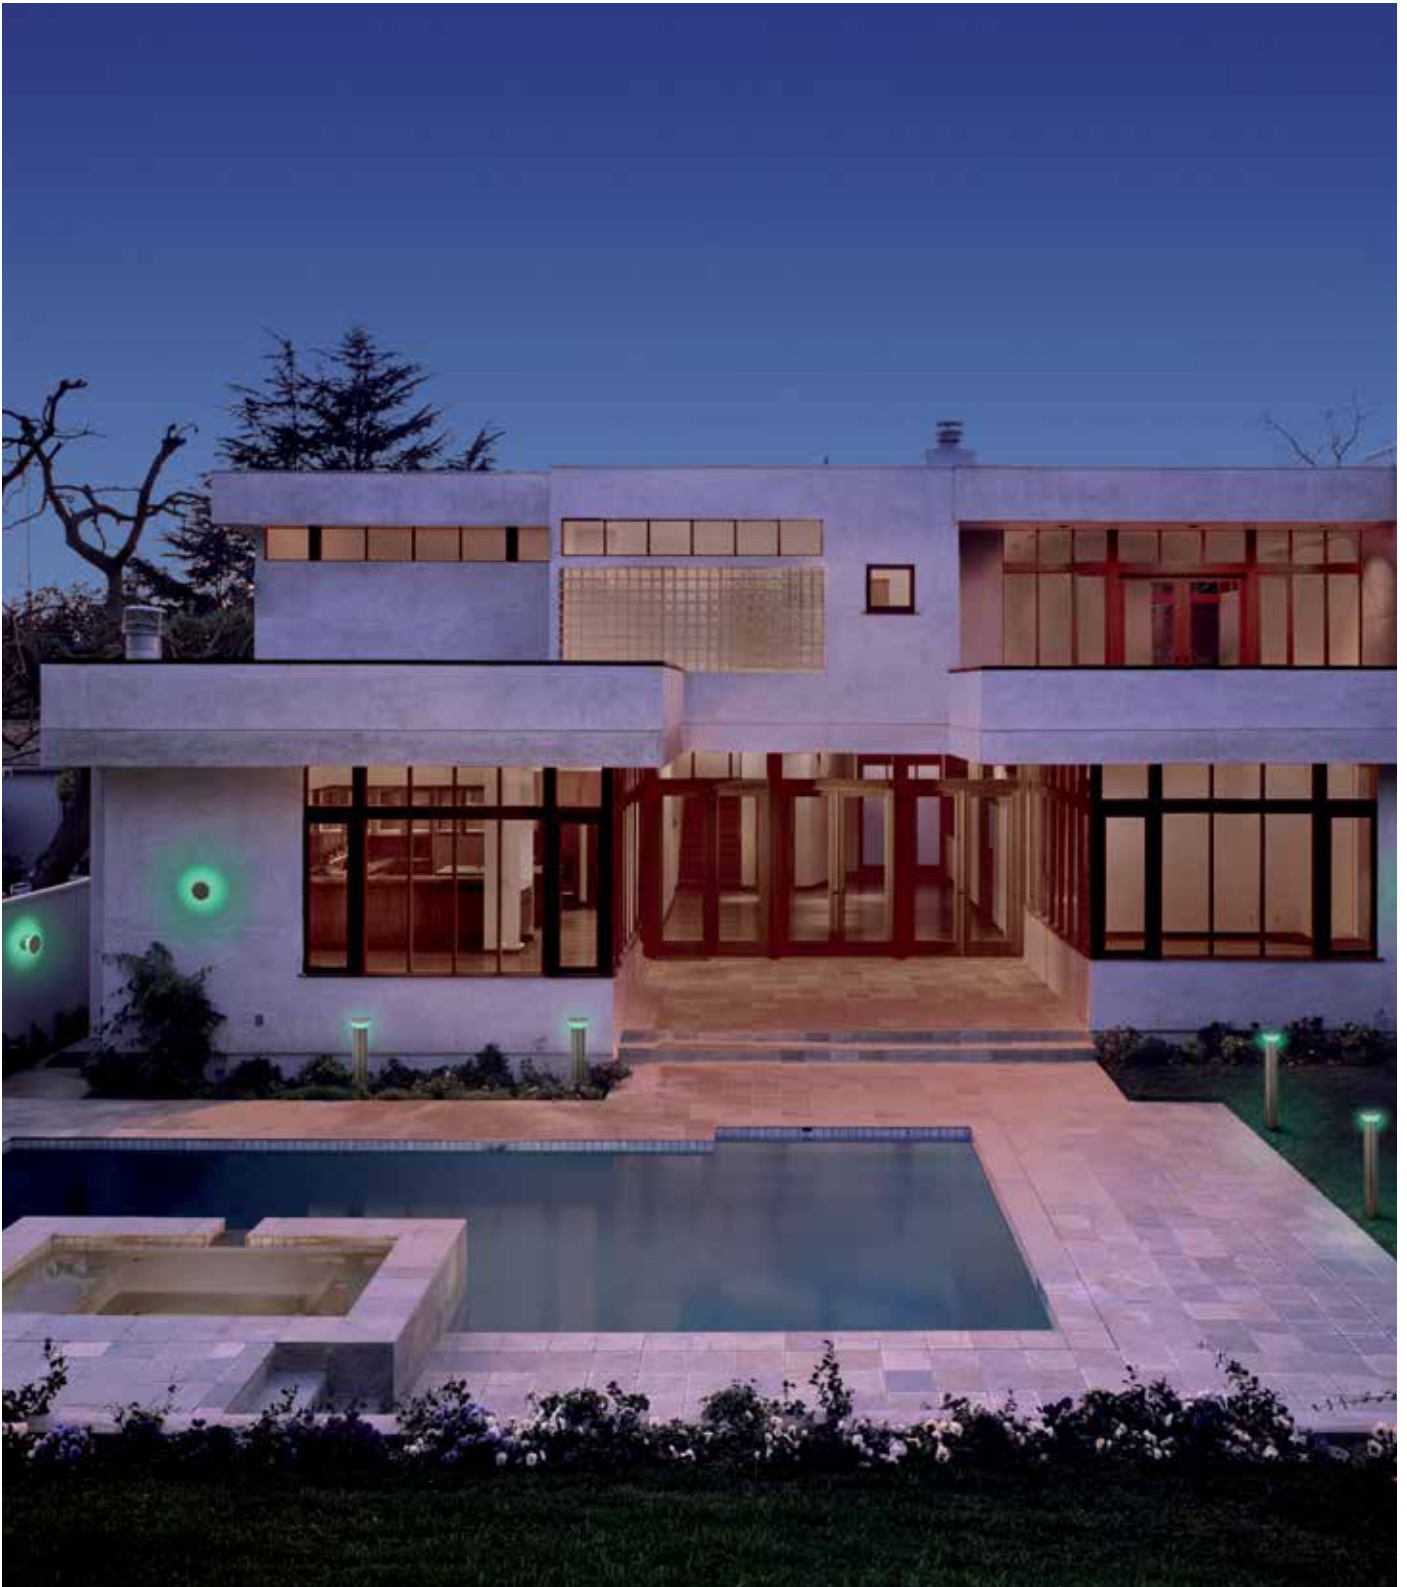





1  
SMART+ ECLIPSE MULTICOLOR  
80cm



2  
SMART+ ECLIPSE MULTICOLOR  
50cm



3  
SMART+ ECLIPSE MULTICOLOR WALL



works with alexa | works with LEDVANCE app | works with Hey Google | Switch on/off | WIFI SMART+ | IP 44 | WARM LIGHT | COLOR | EASY MOUNTING | DIM | LEDVANCE 3 JAHRE GARANTIE


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t <sub>h</sub> <sup>2</sup>	W	l <sub>m</sub> <sup>3</sup> OUTPUT	l <sub>m</sub> <sup>4</sup> LIGHT SOURCE	K	CRI	°
SMART+ ECLIPSE MULTICOLOR 80cm	4058075763326	1	Silver	Stainless steel	25 000	10.00	250	850	3 000	≥80	330
SMART+ ECLIPSE MULTICOLOR 50cm	4058075763302	2	Silver	Stainless steel	25 000	10.00	250	850	3 000	≥80	330
SMART+ ECLIPSE MULTICOLOR WALL	4058075763289	3	Silver	Stainless steel	25 000	10.00	250	850	3 000	≥80	330

Product name	IP	h (mm)	d (mm)	°	
SMART+ ECLIPSE MULTICOLOR 80cm	IP44	12 500	800.0	150.0	2
SMART+ ECLIPSE MULTICOLOR 50cm	IP44	12 500	500.0	150.0	2
SMART OUTD WIFI	IP44	12 500	102.0	150.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ WIFI TRUNK SQUARE

FAMILY OF SMART OUTDOOR LIGHTS WITH ALUMINUM HOUSING IN WOODEN DESIGN

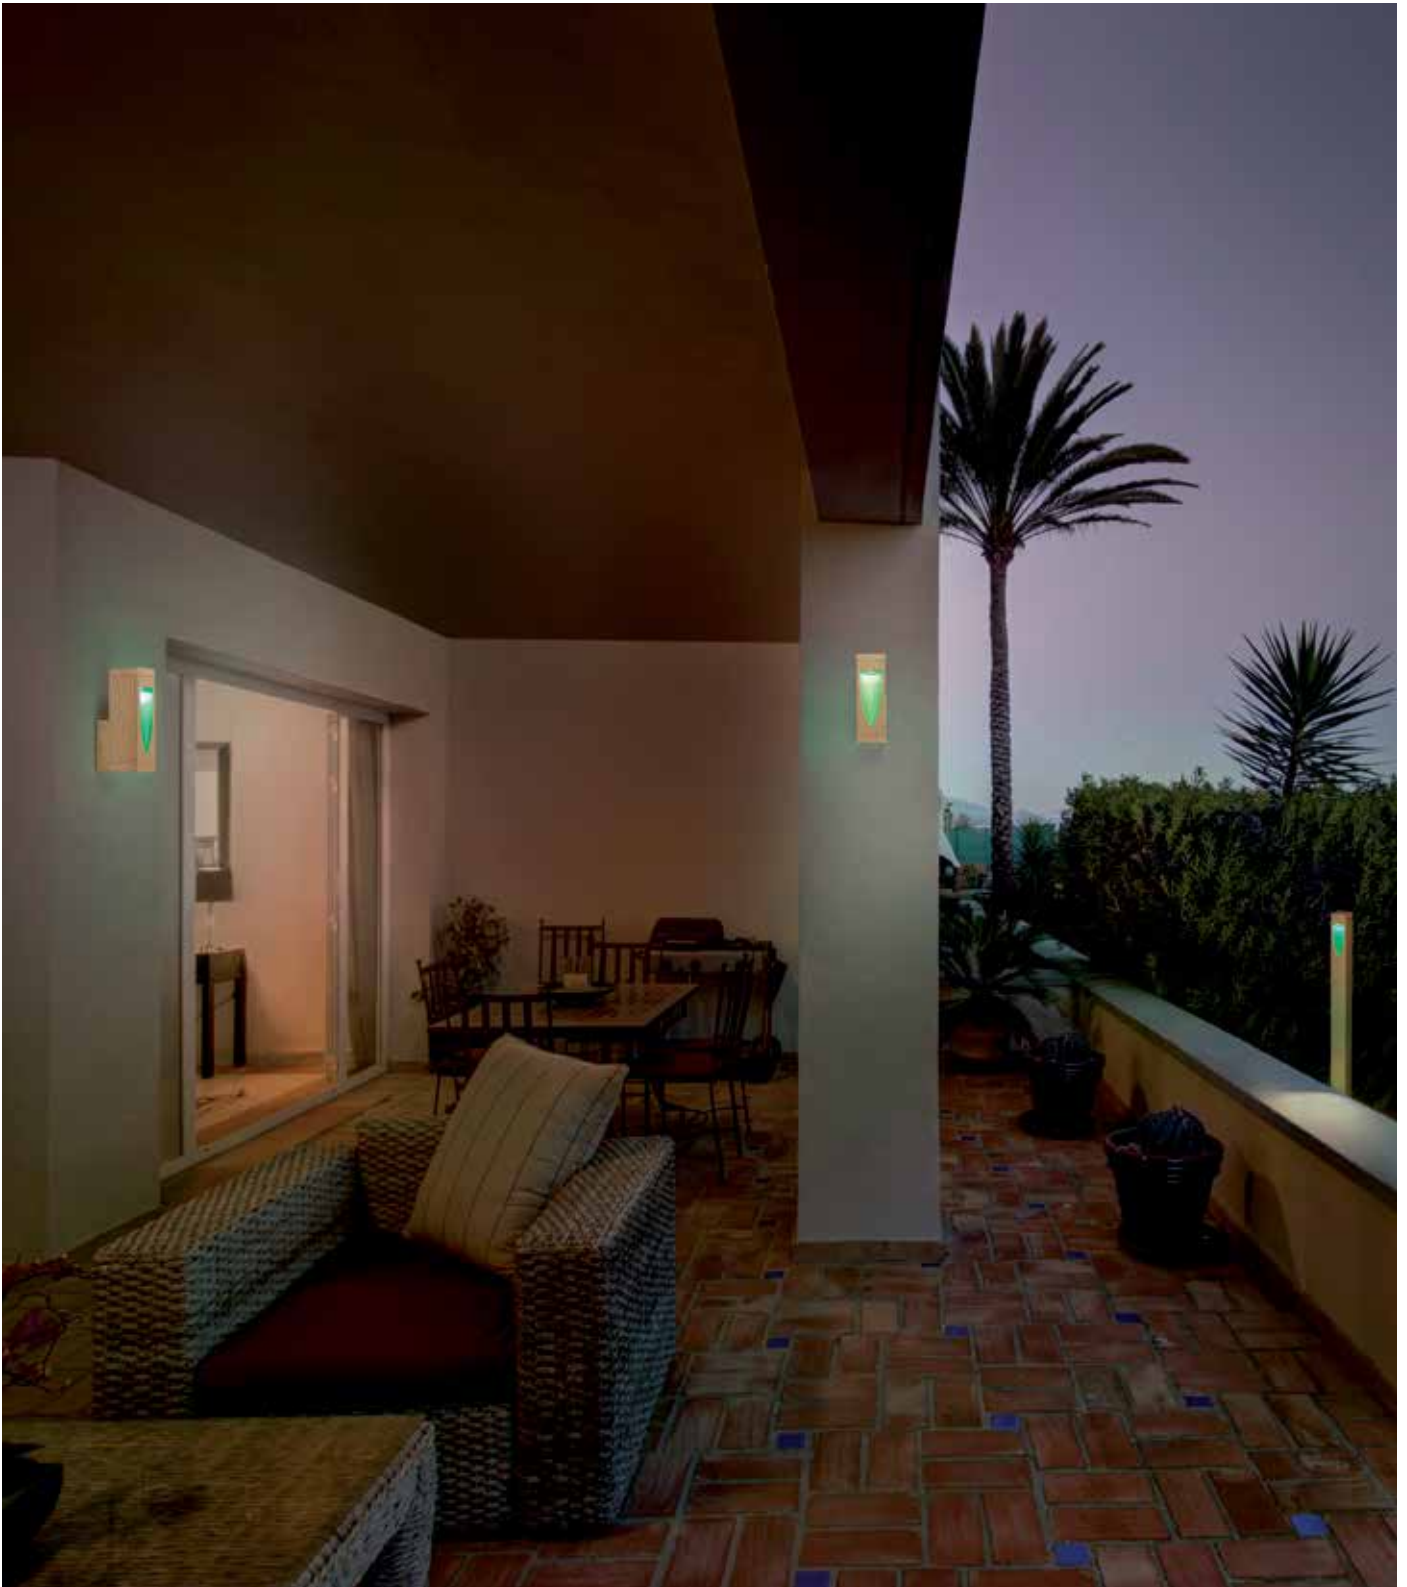



1 SMART+ TRUNK SQ MULTICOLOR WALL



2 SMART+ TRUNK SQ MULTICOLOR 80cm



3 SMART+ TRUNK SQ MULTICOLOR 50cm



works with alexa | works with LEDVANCE app | works with Hey Google | Switch on/off | WIFI SMART+ | IP 44 | WARM LIGHT | COLOR | EASY MOUNTING | DIM | LEDVANCE 3 JAHRE GARANTIE


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	Im <sup>3</sup> OUTPUT	Im <sup>4</sup> LIGHT SOURCE	K	CRI	°
SMART+ TRUNK SQ MULTICOLOR WALL	4058075763340	1	Wood	Aluminum	25 000	7.50	220	550	3 000	≥80	75
SMART+ TRUNK SQ MULTICOLOR 80cm	4058075763388	2	Wood	Aluminum	25 000	7.50	220	550	3 000	≥80	75
SMART+ TRUNK SQ MULTICOLOR 50cm	4058075763364	3	Wood	Aluminum	25 000	7.50	220	550	3 000	≥80	75

Product name	IP	l (mm)	b (mm)	h (mm)	°	
SMART+ TRUNK SQ MULTICOLOR WALL	IP44	12 500	67.5	97.0	204.0	4
SMART+ TRUNK SQ MULTICOLOR 80cm	IP44	12 500	66.0	66.0	800.0	2
SMART+ TRUNK SQ MULTICOLOR 50cm	IP44	12 500	66.0	66.0	500.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Gesamtlichtstrom der Leuchte unter Berücksichtigung des Diffusors | <sup>4</sup> Gesamtlichtstrom der enthaltenen Lichtquellen ohne Diffusor

## SMART+ WIFI SWING ROUND

FAMILY OF SMART OUTDOOR LIGHTS WITH ALUMINUM HOUSING AND ROTATABLE LIGHT SOURCE

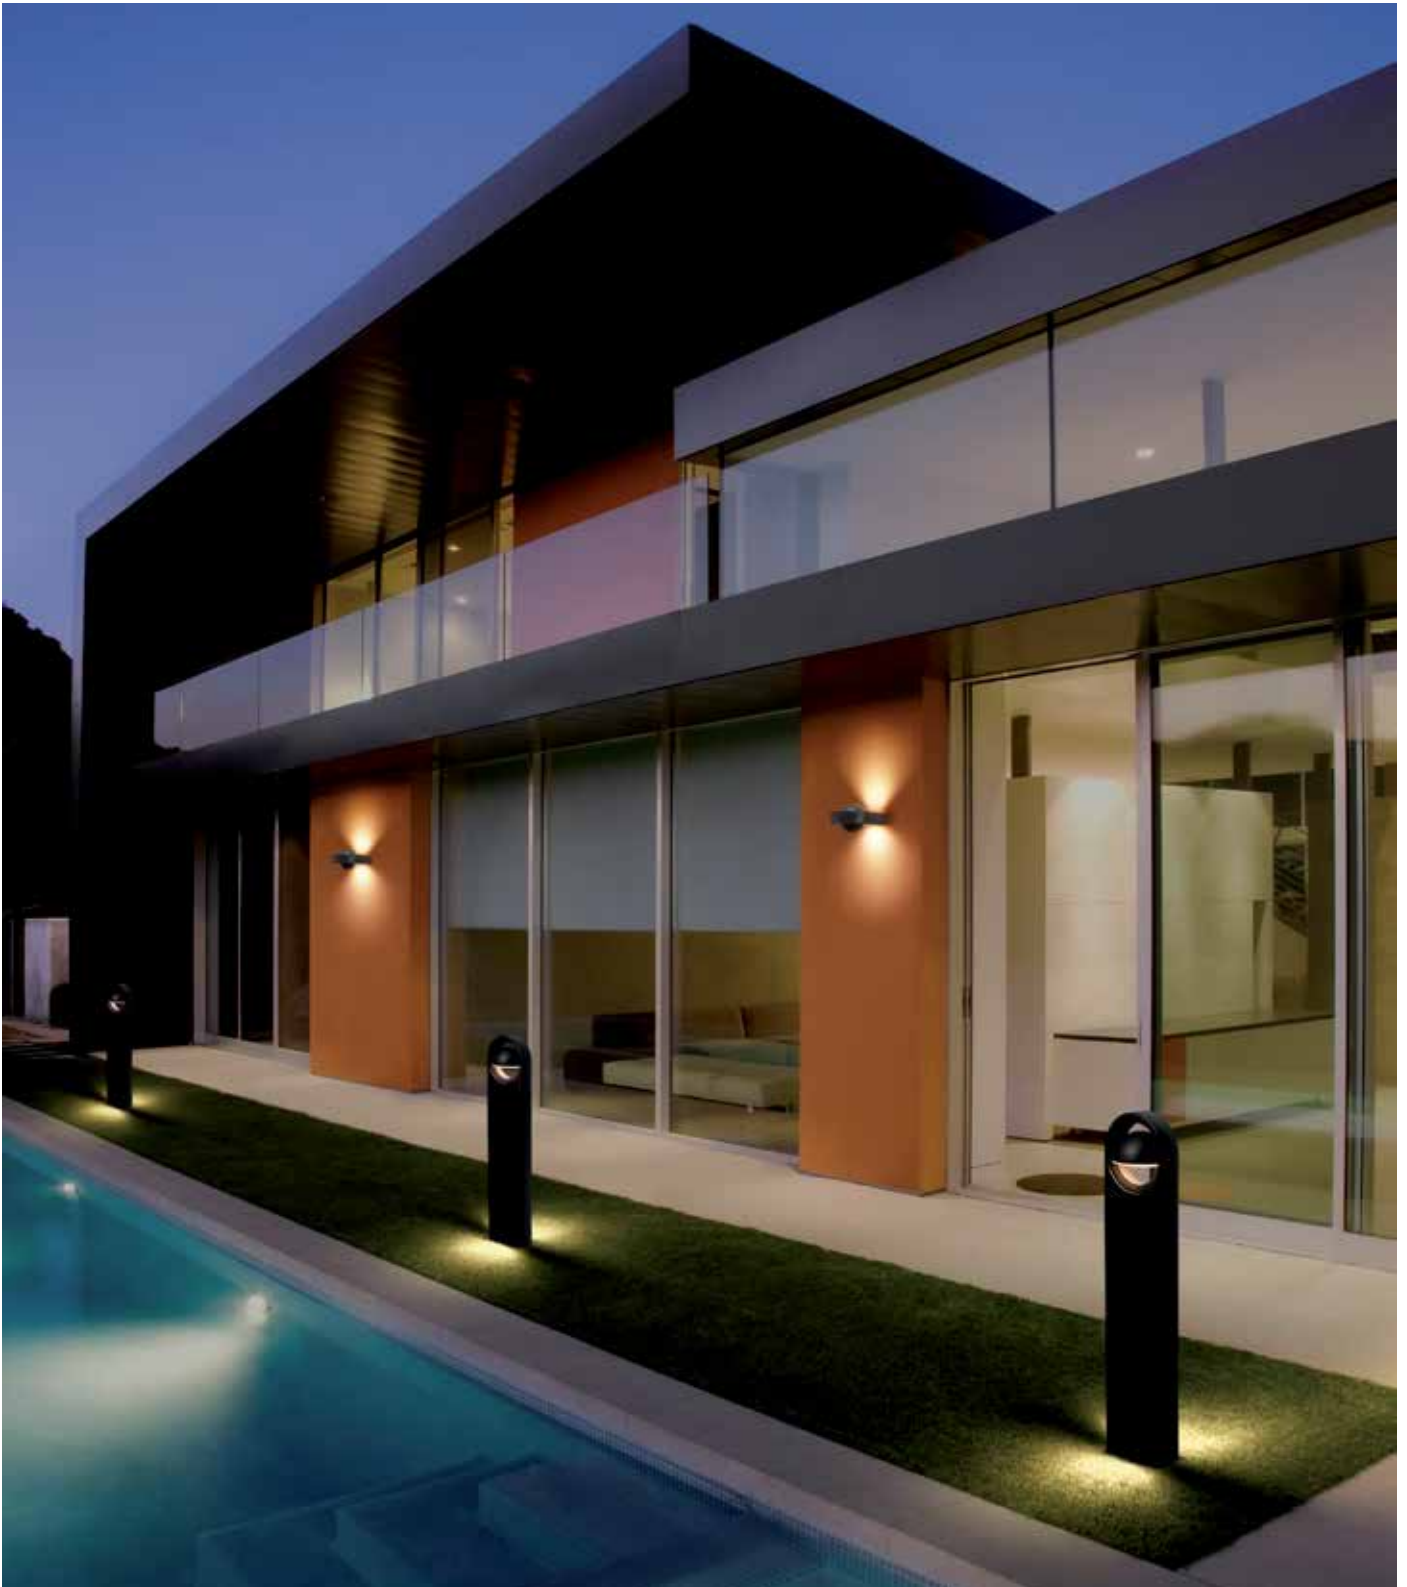



1  
SMART+ WIFI SWING ROUND



2  
SMART+ WIFI SWING ROUND Wall



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----

SMART+ WIFI SWING ROUND 70cm	4058075763821	1	Black	Aluminum	25 000	6.70	350	420	3 000...6 500	> 80
SMART+ WIFI SWING ROUND Wall	4058075763807	2	Black	Aluminum	25 000	6.70	350	420	3 000...6 500	> 80


Product name	IP	l (mm)	b (mm)	h (mm)	Weight
--------------	----	--------	--------	--------	--------

SMART+ WIFI SWING ROUND 70cm	IP44	12 500	170.0	65.0	700.0	4
SMART+ WIFI SWING ROUND Wall	IP44	12 500	160.0	185.0	65.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART<sup>+</sup> BLUETOOTH TABLEFRAME SOLAR

MOBILE IP44 TABLE LIGHT WITH SOLAR PANEL, TUNABLE WHITE, RGB AND DIMMING FUNCTIONS

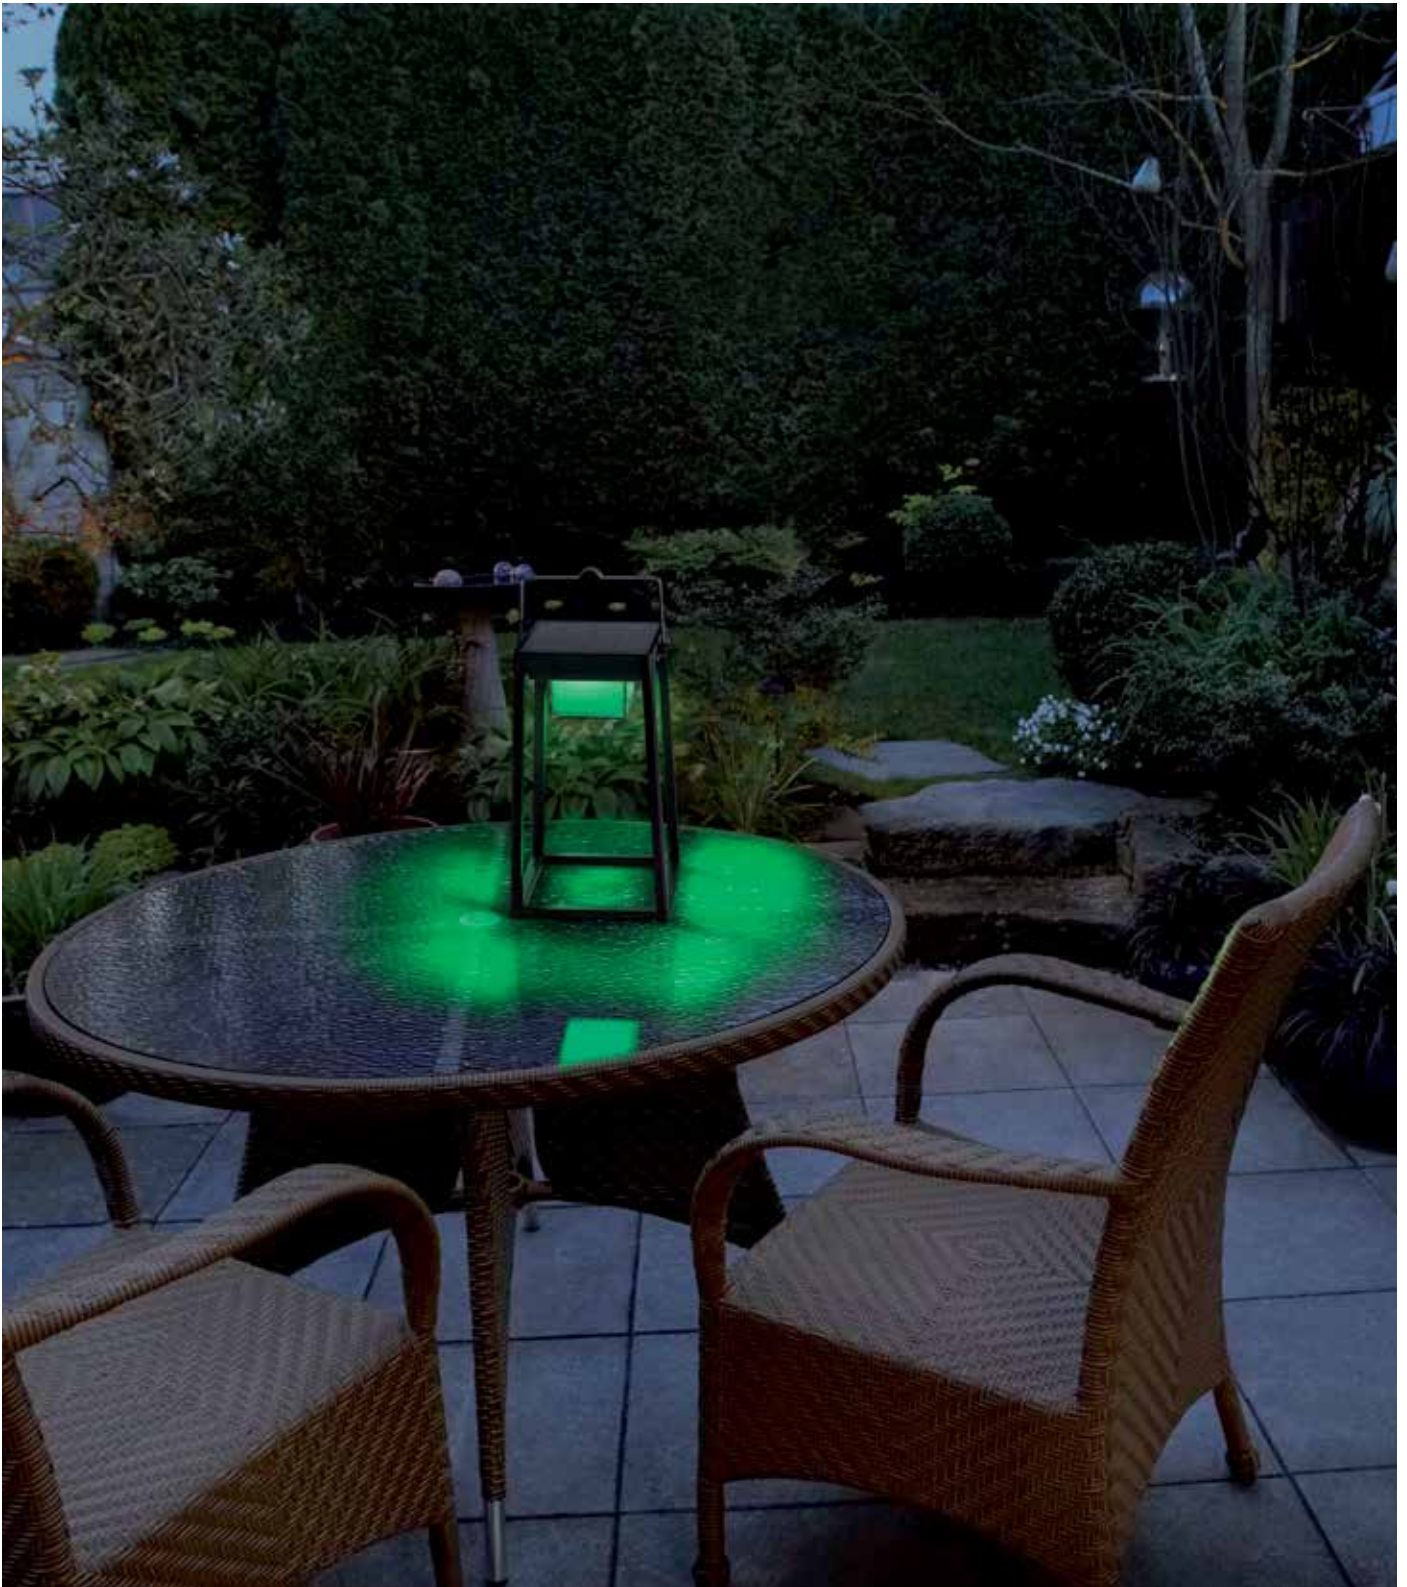



1  
SMART+ BT TABLEFRAME  
SOLAR



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t <sub>h</sub> <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	K	CRI	IP
--------------	------------	-----	-------	----------	-----------------------------	---	------------------------	---	-----	----

SMART+ BT TABLEFRAME SOLAR	4058075763760	1	Black	Aluminum Plastic (PC)	25 000	2.50	200	3 000	> 80	IP44
----------------------------	---------------	---	-------	-----------------------	--------	------	-----	-------	------	------


Product name	Area (cm²)	Length (mm)	Width (mm)	Height (mm)	Qty
--------------	------------	-------------	------------	-------------	-----

SMART+ BT TABLEFRAME SOLAR	12 500	180.0	180.0	300.0	4
----------------------------	--------	-------	-------	-------	---

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser

## SMART<sup>+</sup> BLUETOOTH SPOT & BOLLARD

SMART RGBW OUTDOOR SPIKE LUMINAIRE WITH SWIVEL LUMINAIRE HEAD AND INDEPENDENT SOLAR PANEL

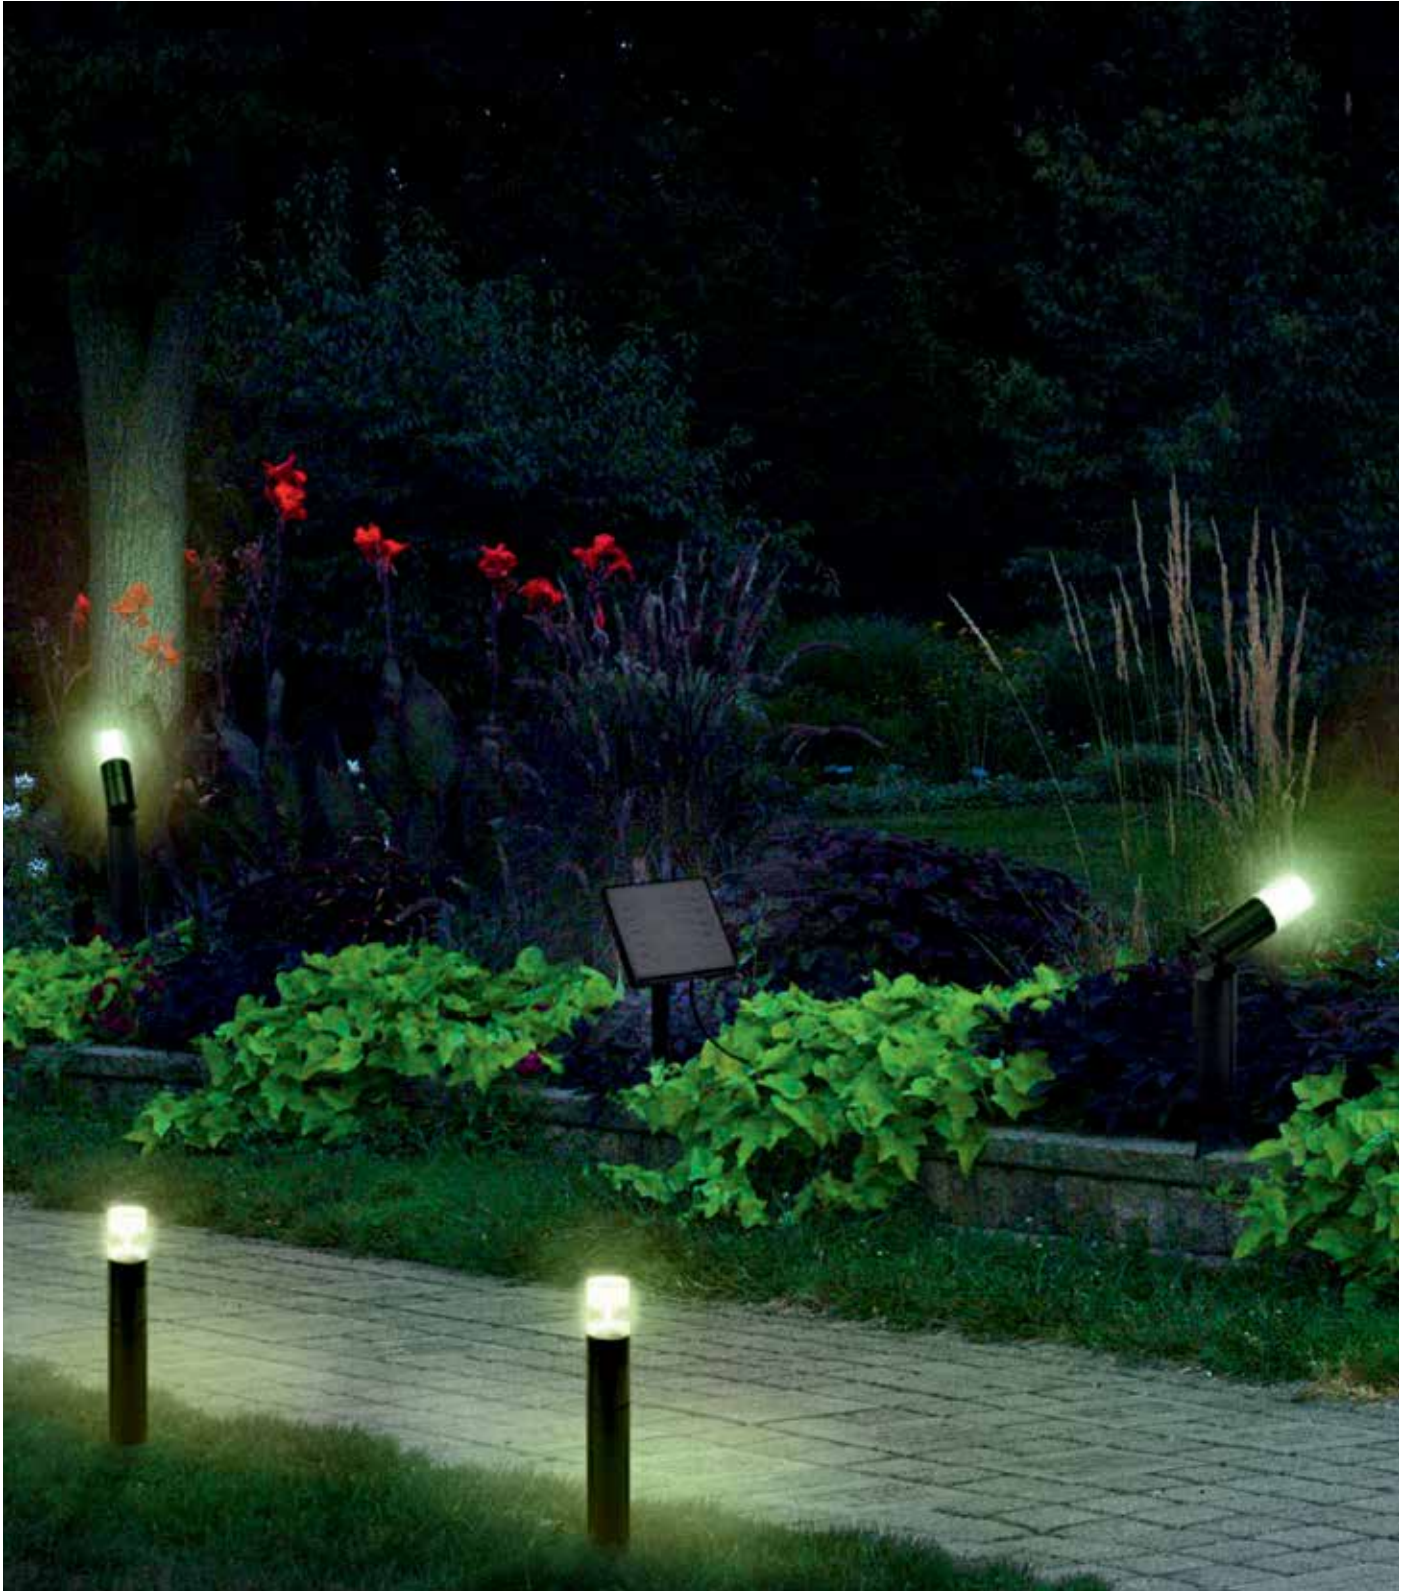





1  
SMART+ OUTD BT SOL  
2BOLLARDSPOTPANEL

works with LEDVANCE app | Bluetooth | DIM | HEAD ADJUSTABLE | SOLAR | WARM LIGHT | COLOR | LEDVANCE 3 year guarantee

Product name	GTIN (EAN)	No.	MATERIAL	t[h] <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP	h [mm]
SMART+ OUTD BT SOL 2BOLLARDSPOTPANEL	4058075763708	1	Plastic (ABS)	25000	2.00	90	200	3000	>80	IP44	455.0

Product name	∅ d [mm]	Quantity
SMART+ OUTD BT SOL 2BOLLARDSPOTPANEL	48.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART<sup>+</sup> BLUETOOTH SOLAR ALPS

FAMILY OF SOLAR OUTDOOR LIGHTS WITH SENSOR, DIMMING FUNCTION AND USB C CHARGING PORT





1  
SMART+ BT ALPS SOLAR WALL



2  
SMART+ BT ALPS SOLAR 70cm



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----

SMART+ BT ALPS SOLAR WALL	4058075763722	1	Black	Aluminum Plastic (PC)	25 000	6.00	400	600	3 000	> 80
SMART+ BT ALPS SOLAR 70cm	4058075763746	2	Black	Aluminum Plastic (PC)	25 000	6.00	400	600	3 000	> 80

Product name	IP	l (mm)	b (mm)	h (mm)	Weight
--------------	----	--------	--------	--------	--------

SMART+ BT ALPS SOLAR WALL	IP44	12 500	152.0	193.0	365.0	4
SMART+ BT ALPS SOLAR 70cm	IP44	12 500	152.0	152.0	700.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART<sup>+</sup> BLUETOOTH SOLAR PATH

SMART, SOLAR-POWERED OUTDOOR SPIKE LUMINAIRES WITH TUNABLE WHITE, RGB AND DIMMING FUNCTION





1  
SMART+ OUTD BT SOLAR PATH RGBTW



works with LEDVANCE app | Bluetooth | DIM | SOLAR | WARM COOL | COLOR | LEDVANCE 3 year guarantee | 1


Product name	GTIN (EAN)	No.	MATERIAL	<sup>2</sup>	<sup>3</sup>	<sup>3</sup>	<sup>4</sup>			
SMART+ OUTD BT SOLAR PATH RGBTW	4058075763869	1	Glass/Aluminum	15000	0.12	5	15	3000...6500	>80	175

Product name					
SMART+ OUTD BT SOLAR PATH RGBTW	IP44	1000	562.0	150.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART+ BLUETOOTH SOLAR SPOT

SMART, SOLAR-POWERED OUTDOOR SPOTLIGHTS WITH TUNABLE WHITE, RGB AND DIMMING FUNCTION

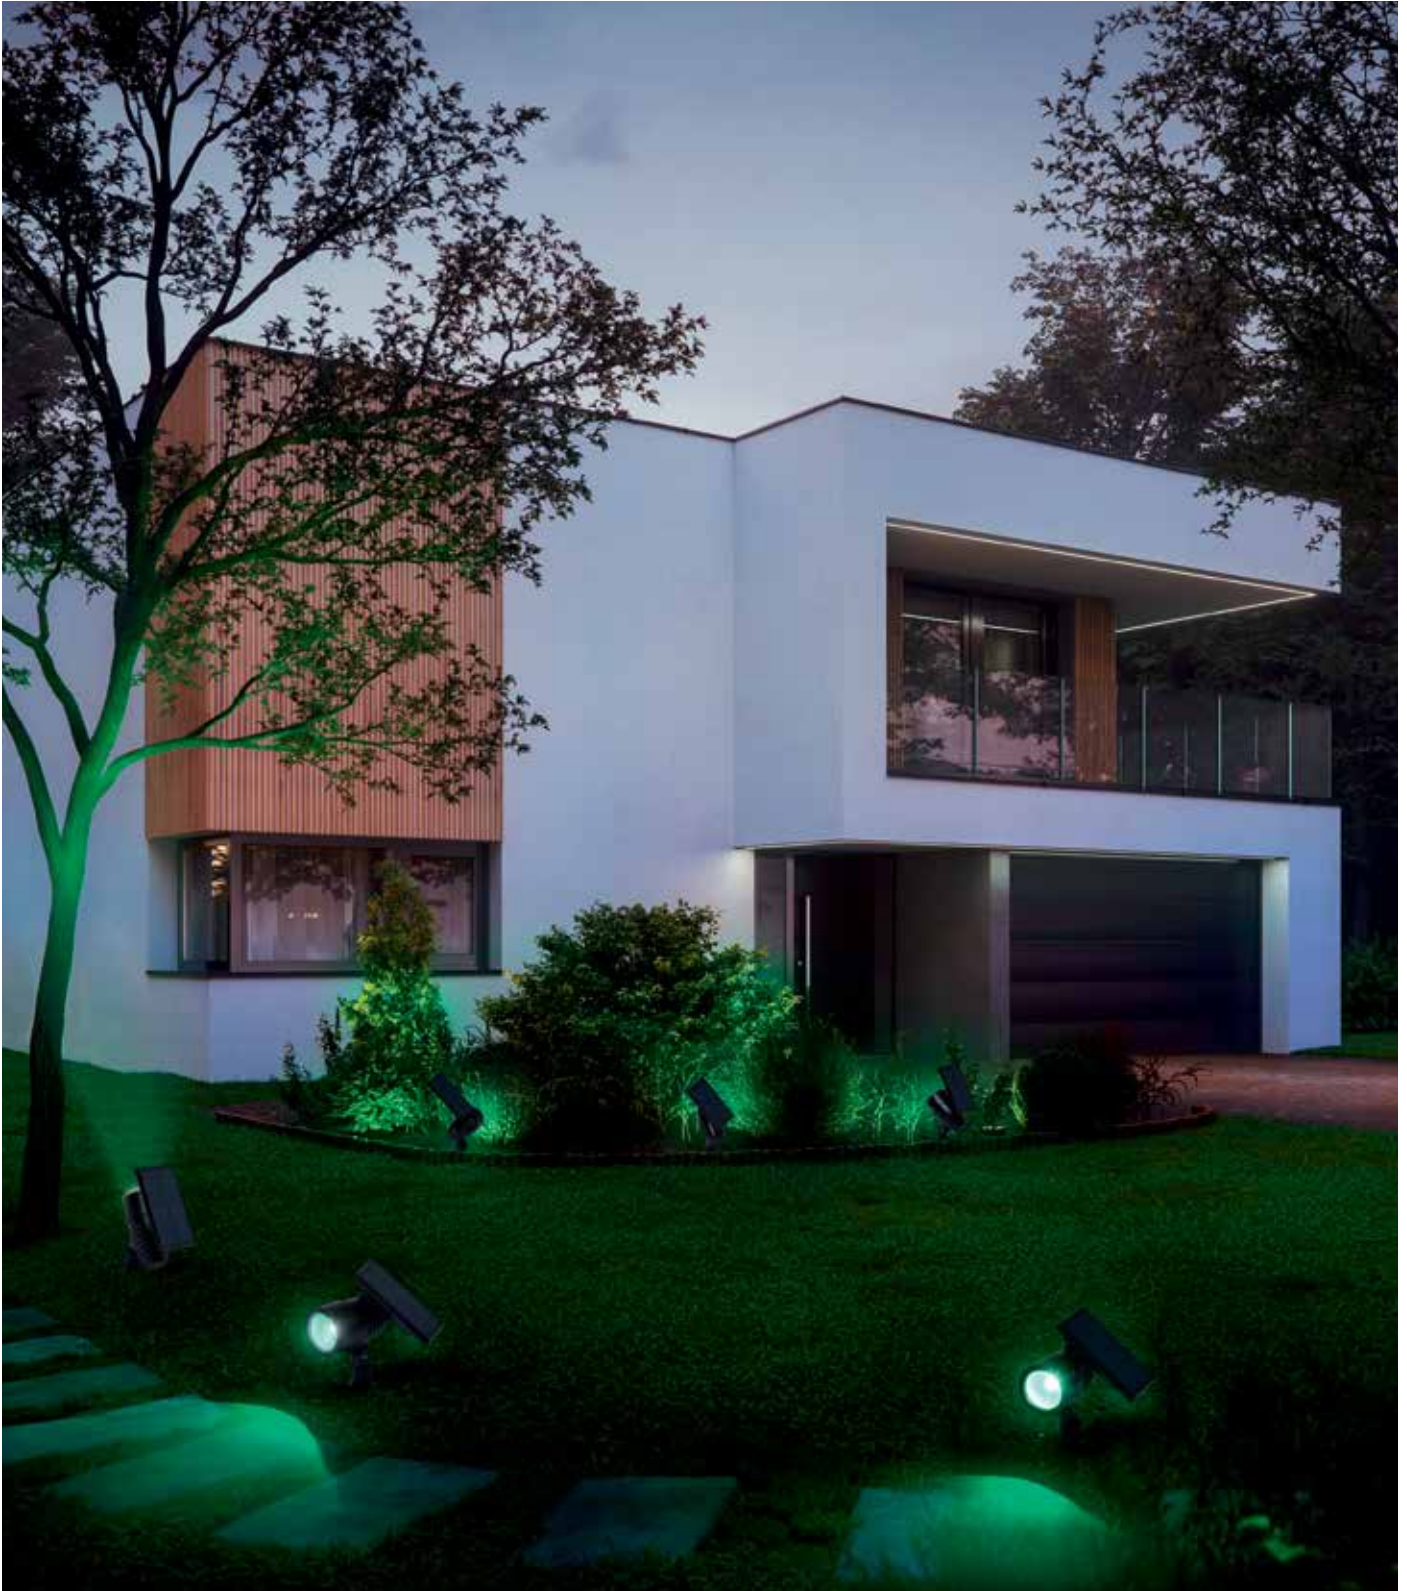



1  
SMART+ OUTD BT SOLAR SPOT RGBTW



Product name	GTIN (EAN)	No.	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	
SMART+ OUTD BT SOLAR SPOT RGBTW	4058075763883	1	Plastic (ABS)	15000	0.60	45	60	3000...6500	>80	58

Product name	IP		l (mm)	b (mm)	h (mm)	
SMART+ OUTD BT SOLAR SPOT RGBTW	IP44	1000	92.0	245.0	348.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## SMART<sup>+</sup> WIFI NEON FLEX MULTICOLOR

DECORATIVE LED STRIPS WITH PARTICULARLY HOMOGENEOUS LIGHT DISTRIBUTION – FOR INDOORS AND OUTDOORS







1  
SMART+ WIFI NEON FLEX



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | LED MODULE INTEGRATED | DIFFUSE LIGHT | DIM | COLOR | WARM COOL | LEDVANCE 3 year guarantee |

Product name	GTIN (EAN)	No.	MATERIAL	<sup>2</sup>		<sup>3</sup>	<sup>4</sup>			
--------------	------------	-----	----------	--------------	--	--------------	--------------	--	--	--

SMART+ WIFI NEON FLEX 5M	4058075504806	1	Silicone	30 000	20.00	630	2100	2700...6500	>80	110
SMART+ WIFI NEON FLEX 3M	4058075504783	1	Silicone	30 000	15.00	520	1260	2700...6500	>80	110

Product name						
--------------	--	--	--	--	--	--

SMART+ WIFI NEON FLEX 5M	IP44	15000	5000.0	8.8	17.5	4
SMART+ WIFI NEON FLEX 3M	IP44	15000	3000.0	8.8	17.5	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **SMART<sup>+</sup> WIFI GARDEN POLE MULTICOLOR**

DECORATIVE, EXPANDABLE GARDEN LIGHTING WITH  
COLOR-CHANGING FUNCTION





1  
SMART+ WIFI GARDEN  
5 Pole



2  
SMART+ WIFI GARDEN  
5 Pole mini



3  
SMART+ WIFI GARDEN  
3 Pole extension



4  
SMART+ WIFI GARDEN  
3 Pole mini extension




Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI
SMART+ WIFI GARDEN 5 Pole	4058075478213	1	Steel	Stainless steel	25 000	5.70	200	350	RGB, 3000	≥80
SMART+ WIFI GARDEN 5 Pole mini	4058075478190	2	Steel	Stainless steel	25 000	3.80	75	220	RGB, 3000	≥80
SMART+ WIFI GARDEN 3 Pole extension	4058075478251	3	Steel	Stainless steel	25 000	3.10	110	210	RGB, 3000	≥80
SMART+ WIFI GARDEN 3 Pole mini extension	4058075478237	4	Steel	Stainless steel	25 000	1.90	45	132	RGB, 3000	≥80

Product name	△	IP	☞	b (mm)	h (mm)	∅ d (mm)	📦
SMART+ WIFI GARDEN 5 Pole	280	IP65	12500	38.0	365.0	38.0	4
SMART+ WIFI GARDEN 5 Pole mini	280	IP65	12500	22.0	227.0	22.0	4
SMART+ WIFI GARDEN 3 Pole extension	280	IP65	12500	38.0	365.0	38.0	4
SMART+ WIFI GARDEN 3 Pole mini extension	280	IP65	12500	22.0	227.0	22.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **SMART<sup>+</sup> WIFI GARDEN SPOT MULTICOLOR**

COMPACT SPOTLIGHTS FOR GARDENS AND TERRACES WITH  
COLOR-CHANGING FUNCTION

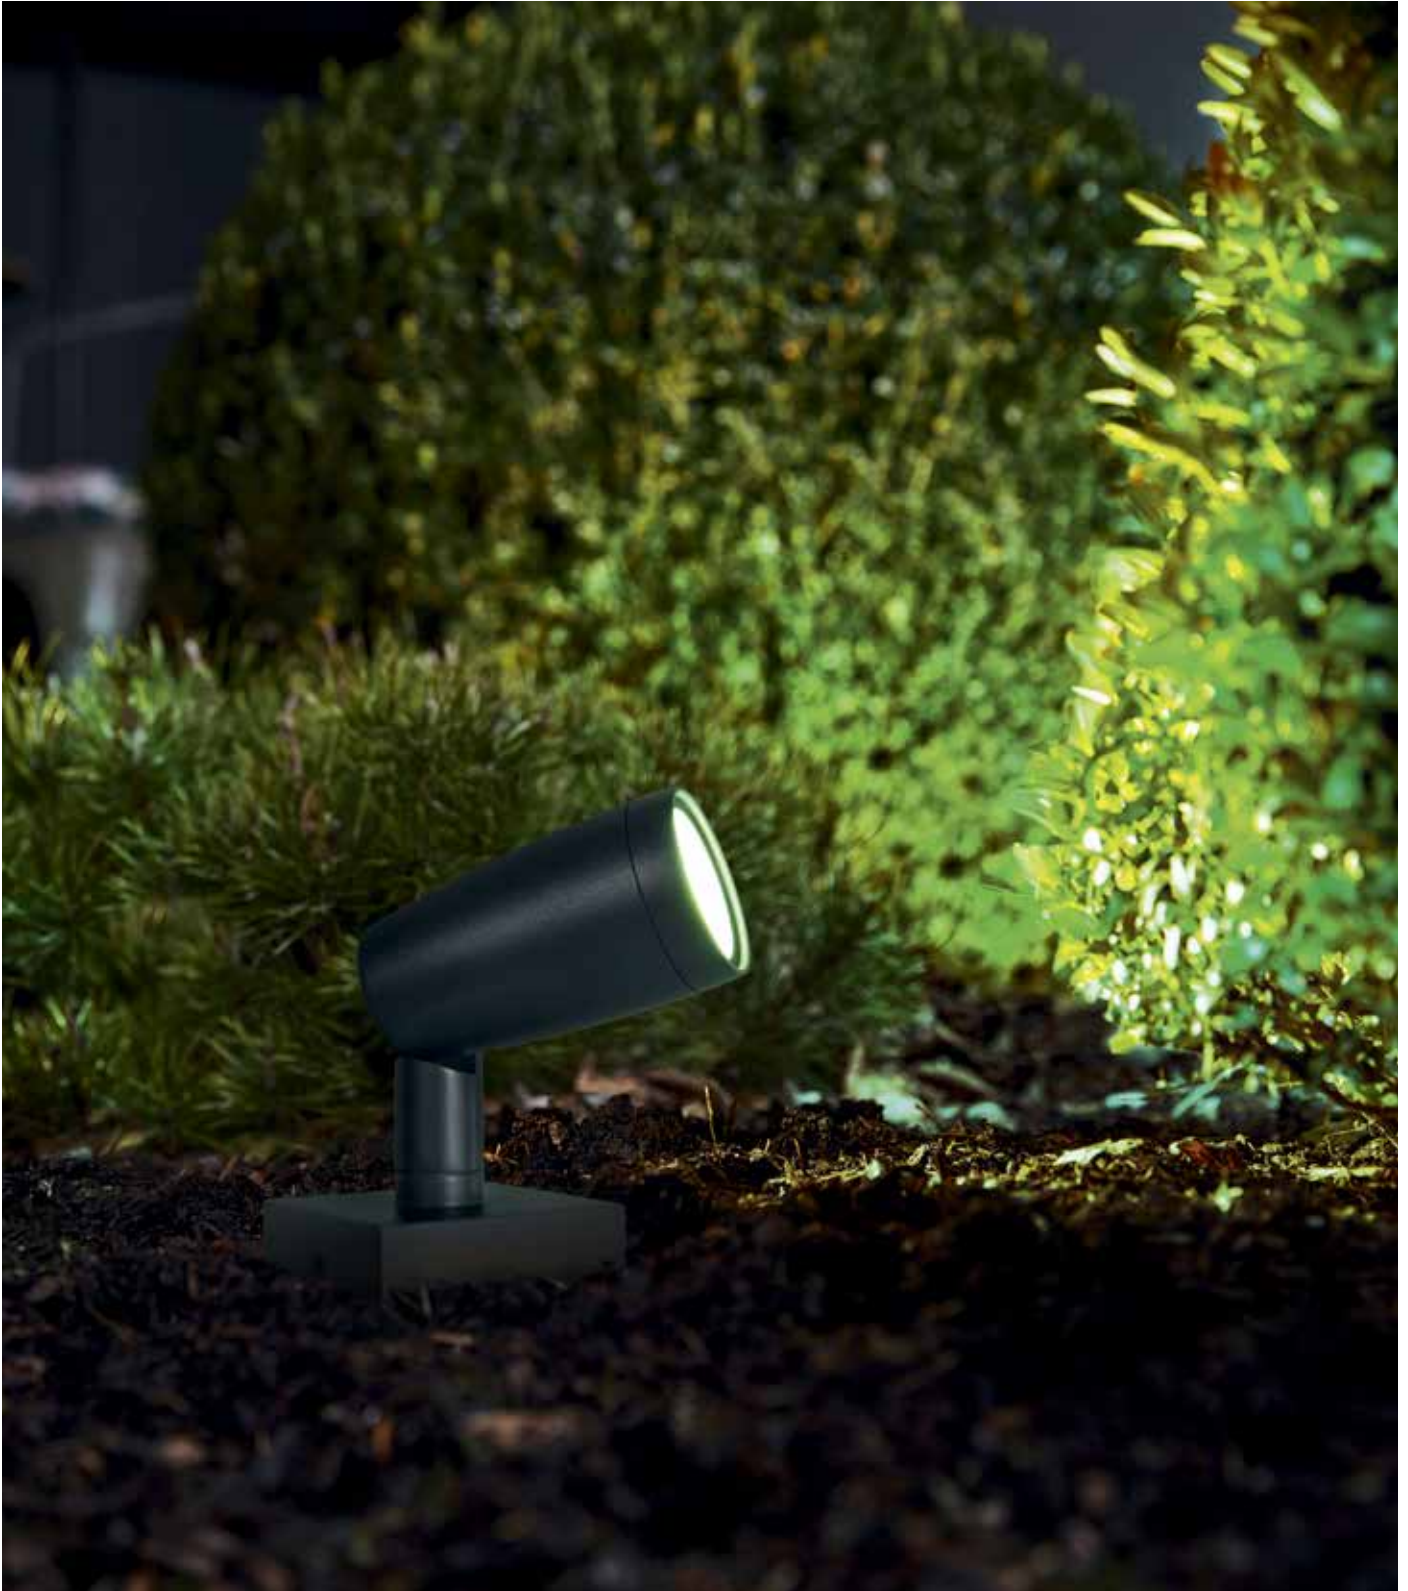



1  
SMART+ WIFI GARDEN  
3 Spot



2  
SMART+ WIFI GARDEN  
1 Spot



3  
SMART+ WIFI GARDEN  
1 Spot extension



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | EASY MOUNTING | DIM | COLOR | WARM LIGHT | LEDVANCE 3 year guarantee |


Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t <sub>90</sub> <sup>2</sup>	W	lm <sup>3</sup> <sub>OUTPUT</sub>	lm <sup>4</sup> <sub>LIGHT SOURCE</sub>	K	CRI
SMART+ WIFI GARDEN 3 Spot	4058075478497	1	Dark gray	Aluminum	25 000	14.50	680	1200	RGB, 3000	≥80
SMART+ WIFI GARDEN 1 Spot	4058075478374	2	Dark gray	Aluminum	25 000	5.00	260	400	RGB, 3000	≥80
SMART+ WIFI GARDEN 1 Spot extension	4058075478398	3	Dark gray	Aluminum	25 000	4.50	260	400	RGB, 3000	≥80


Product name		IP		l [mm]	b [mm]	h [mm]	
SMART+ WIFI GARDEN 3 Spot	76	IP65	12500	145.0	90.0	295.0	4
SMART+ WIFI GARDEN 1 Spot	76	IP65	12500	145.0	90.0	295.0	4
SMART+ WIFI GARDEN 1 Spot extension	76	IP65	12500	145.0	90.0	295.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **SMART<sup>+</sup> WIFI GARDEN DOT MULTICOLOR**

SMALL GARDEN SPOTLIGHTS WITH FLEXIBLE MOUNTING AND COLOR-CHANGING FUNCTION

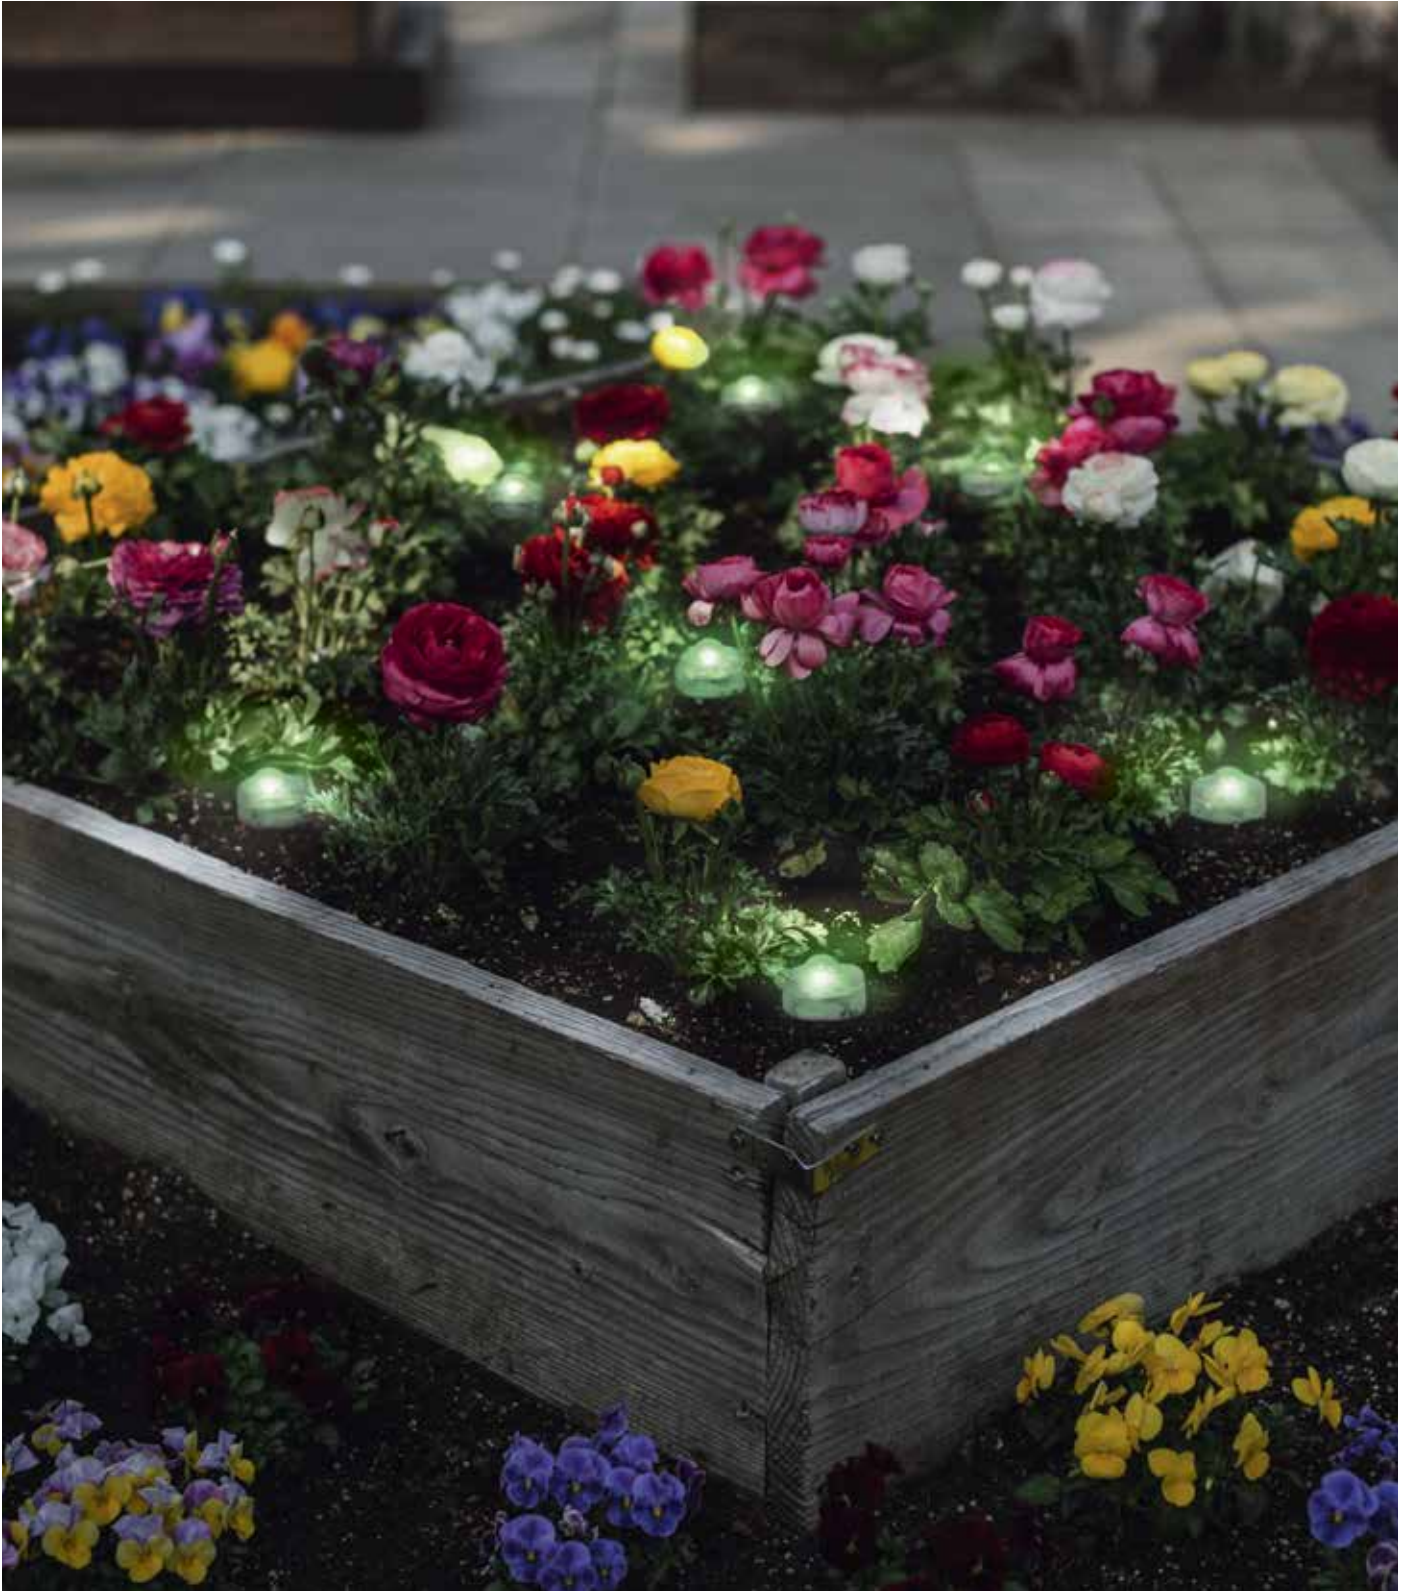



1  
SMART+ WIFI GARDEN  
18 Dot



2  
SMART+ WIFI GARDEN  
9 Dot



3  
SMART+ WIFI GARDEN  
3 Dot extension



works with alexa | works with LEDVANCE app | works with Hey Google | WIFI | LDV WIFI | LED MODULE INTEGRATED | EASY MOUNTING | DIM | COLOR | LEDVANCE 3 year guarantee |

Product name	GTIN (EAN)		COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	
SMART+ WIFI GARDEN 18 Dot	4058075478558	1	Transparent	Plastic (PC)	25 000	4.00	680	-	RGB	33
SMART+ WIFI GARDEN 9 Dot	4058075478534	2	Transparent	Plastic (PC)	25 000	2.50	380	-	RGB	33
SMART+ WIFI GARDEN 3 Dot extension	4058075478572	3	Transparent	Plastic (PC)	25 000	0.70	110	-	RGB	33

Product name	IP		b (mm)	h (mm)	∅ d (mm)	
SMART+ WIFI GARDEN 18 Dot	IP65	12500	23.0	96.0	23.0	4
SMART+ WIFI GARDEN 9 Dot	IP65	12500	23.0	96.0	23.0	4
SMART+ WIFI GARDEN 3 Dot extension	IP65	12500	23.0	96.0	23.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE BAT

OUTDOOR LUMINAIRE FAMILY IN A MODERN WING DESIGN







1  
ENDURA STYLE BAT  
80cm Post



2  
ENDURA STYLE BAT  
50cm Post



3  
ENDURA STYLE BAT Wall



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
ENDURA STYLE BAT 80CM Post	4058075564107	1	Dark gray	Aluminum	25 000	9.50	580	1000	3000	≥80	120
ENDURA STYLE BAT 50CM Post	4058075564084	2	Dark gray	Aluminum	25 000	9.50	580	1000	3000	≥80	120
ENDURA STYLE BAT Wall	4058075564060	3	Dark gray	Aluminum	25 000	9.50	580	1000	3000	≥80	120

Product name	IP	l (mm)	b (mm)	h (mm)	°	
ENDURA STYLE BAT 80CM Post	IP44	12500	200.0	177.0	800.0	2
ENDURA STYLE BAT 50CM Post	IP44	12500	200.0	177.0	500.0	2
ENDURA STYLE BAT Wall	IP44	12500	177.0	169.0	84.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE DISC WALL

LED OUTDOOR WALL LUMINAIRES WITH OR WITHOUT INTEGRATED SENSORS





1  
ENDURA STYLE DISC Wall Sensor



2  
ENDURA STYLE DISC Wall



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	----

ENDURA STYLE DISC Wall Sensor	4058075564145	1	Steel	Stainless Steel	25 000	8.00	370	850	3 000	≥80	IP44
ENDURA STYLE DISC Wall	4058075564121	2	Steel	Stainless Steel	25 000	8.00	370	850	3 000	≥80	IP44


Product name	l (mm)	b (mm)	h (mm)	d (mm)	Quantity
--------------	--------	--------	--------	--------	----------

ENDURA STYLE DISC Wall Sensor	12 500	244.0	200.0	60.0	-	4
ENDURA STYLE DISC Wall	12 500	-	-	60.0	200.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE BOW WALL**

AESTHETIC LED OUTDOOR WALL LUMINAIRES FOR  
INDIRECT LIGHTING

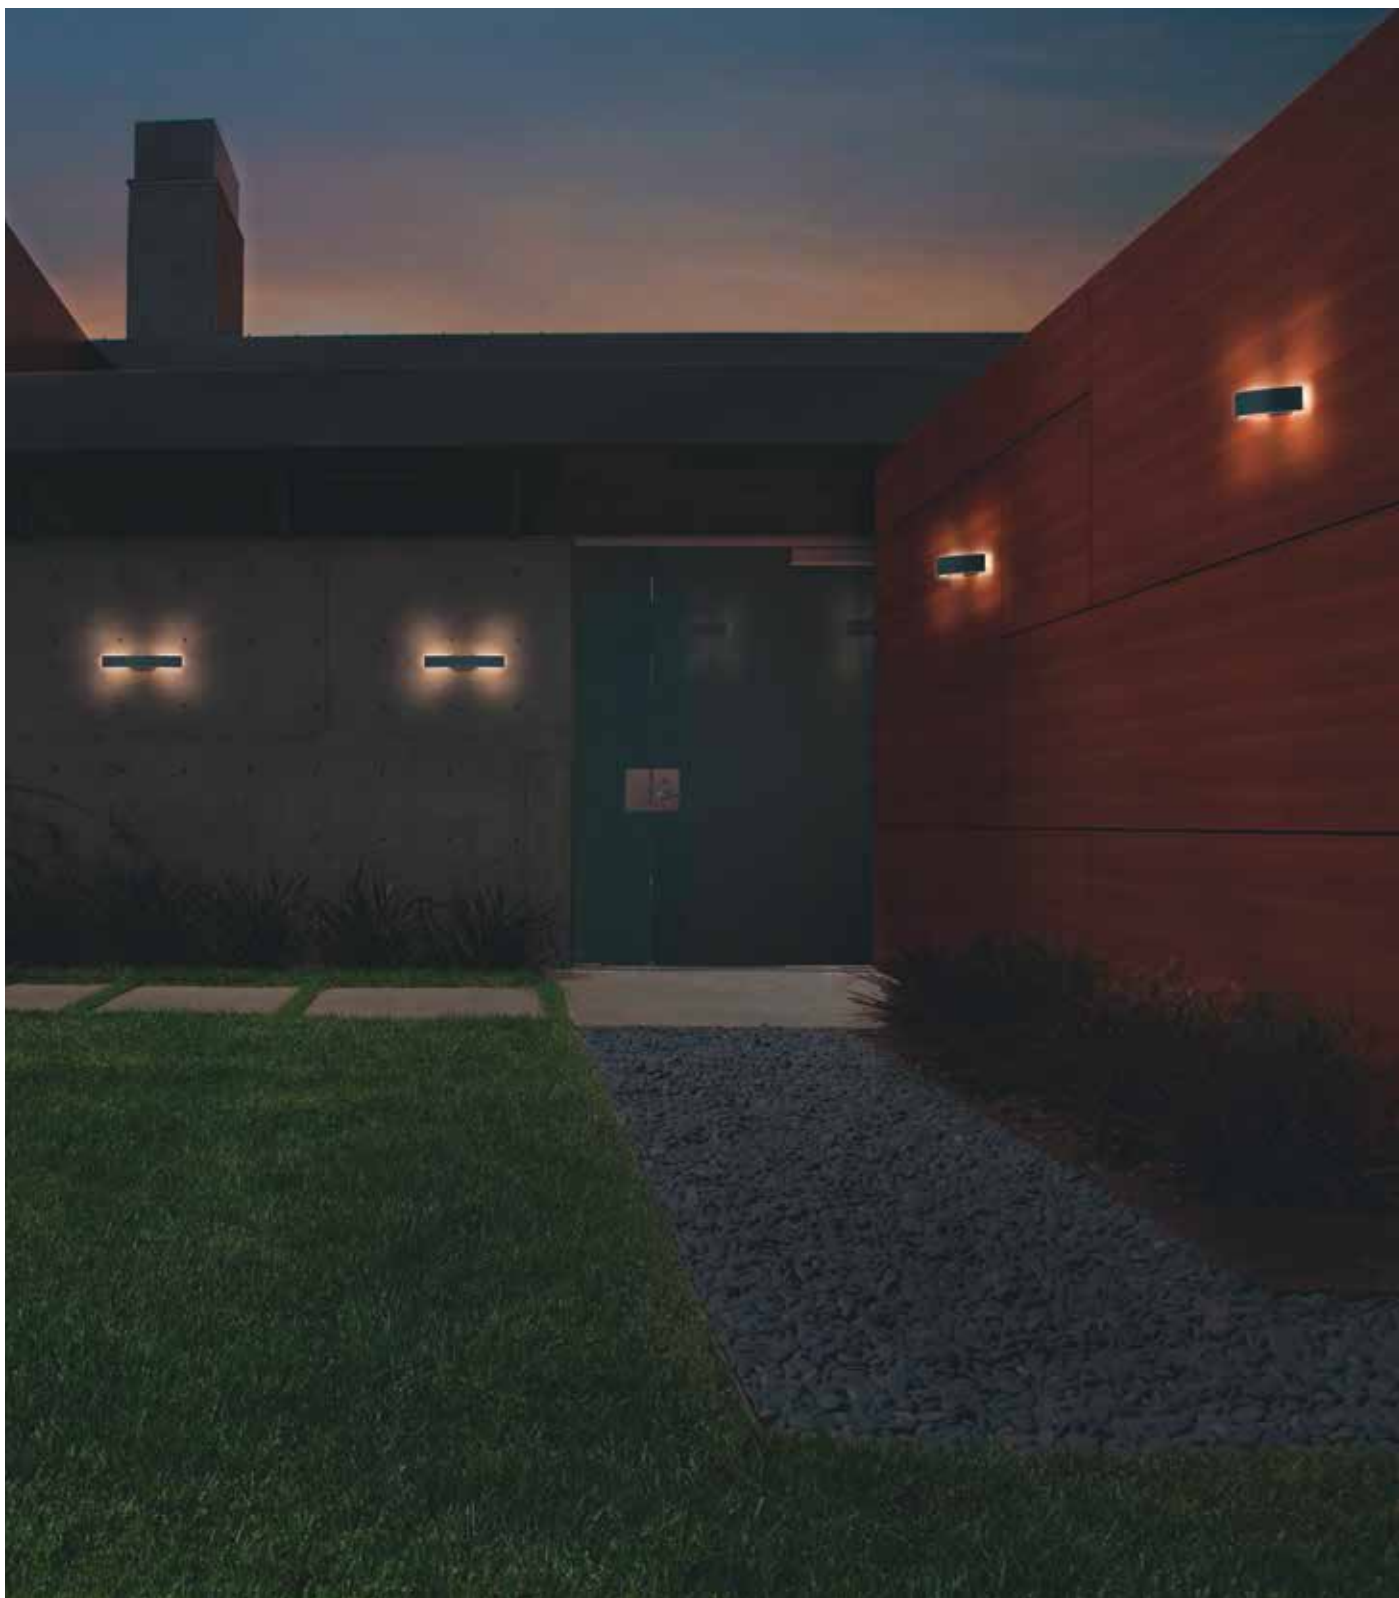



1  
ENDURA STYLE BOW Wall



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	$t_{90}$ <sup>2</sup>	W	$l_m$ <sup>3</sup> OUTPUT	$l_m$ <sup>4</sup> LIGHT SOURCE	K	CRI	
ENDURA STYLE BOW Wall	4058075564589	1	Dark gray	Aluminum	25 000	7.00	280	750	3 000	>80	355

Product name	IP		$l$ <sub>(mm)</sub>	$b$ <sub>(mm)</sub>	$h$ <sub>(mm)</sub>	
ENDURA STYLE BOW Wall	IP44	100 000	270.0	37.0	58.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE CRYSTAL

STAINLESS STEEL WALL AND BOLLARD LUMINAIRES WITH TIMELESS DESIGN





1  
ENDURA STYLE CRYSTAL Wall UpDown  
9W



2  
ENDURA STYLE CRYSTAL Wall Sensor  
5W



3  
ENDURA STYLE CRYSTAL Torch Sensor  
5W



4  
ENDURA STYLE CRYSTAL Wall  
4.5W



5  
ENDURA STYLE CRYSTAL  
80CM Post 4.5W

















6  
ENDURA STYLE CRYSTAL  
40CM Post 4.5W



7  
ENDURA STYLE CRYSTAL Torch  
4.5W



Product name	GTIN (EAN)	 No.	 COLOR	 MATERIAL	 <sup>2</sup>	 W	 <sup>3</sup>	 <sup>4</sup>	 K	 CRI	 IP
ENDURA STYLE CRYSTAL Wall UpDown 9W	4058075474130	1	Steel	Steel	25 000	9.00	800	1 000	3 000	≥80	IP44
ENDURA STYLE CRYSTAL Wall Sensor 5W	4058075474154	2	Steel	Steel	25 000	5.00	400	500	3 000	≥80	IP44
ENDURA STYLE CRYSTAL Torch Sensor 5W	4058075474192	3	Steel	Steel	25 000	5.00	400	500	3 000	≥80	IP44
ENDURA STYLE CRYSTAL Wall 4.5W	4058075474178	4	Steel	Steel	25 000	4.50	400	500	3 000	≥80	IP44
ENDURA STYLE CRYSTAL 80CM Post 4.5W	4058075474239	5	Steel	Steel	25 000	4.50	400	500	3 000	≥80	IP44
ENDURA STYLE CRYSTAL 40CM Post 4.5W	4058075474253	6	Steel	Steel	25 000	4.50	400	500	3 000	≥80	IP44
ENDURA STYLE CRYSTAL Torch 4.5W	4058075474215	7	Steel	Steel	25 000	4.50	400	500	3 000	≥80	IP44

Product name	 L (mm)	 b (mm)	 h (mm)		
ENDURA STYLE CRYSTAL Wall UpDown 9W	12 500	105.0	80.0	215.0	6
ENDURA STYLE CRYSTAL Wall sensor 5W	12 500	105.0	80.0	200.0	6
ENDURA STYLE CRYSTAL Torch Sensor 5W	12 500	80.0	80.0	250.0	6
ENDURA STYLE CRYSTAL Wall 4.5W	12 500	105.0	80.0	160.0	6
ENDURA STYLE CRYSTAL 80CM Post 4.5W	12 500	80.0	80.0	800.0	6
ENDURA STYLE CRYSTAL 40CM Post 4.5W	12 500	80.0	80.0	400.0	6
ENDURA STYLE CRYSTAL Torch 4.5W	12 500	80.0	80.0	225.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE EDGE WALL UPDOWN**

WALL LUMINAIRE IN A REDUCED ALUMINUM LOOK WITH LIGHT OUTLET UP AND DOWN







1  
ENDURA STYLE EDGE Wall UpDown  
7W



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	$t_{h}$ <sup>2</sup>	W	$l_m$ <sup>3</sup> OUTPUT	$l_m$ <sup>4</sup> LIGHT SOURCE	K	CRI	IP
ENDURA STYLE EDGE Wall UpDown 7W	4058075478091	1	Steel	Stainless steel	25 000	7.00	360	850	3 000	≥80	IP44

Product name	L (mm)	b (mm)	h (mm)		
ENDURA STYLE EDGE Wall UpDown 7W	12 500	110.0	120.0	260.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE LANTERN FLARE

WALL AND BOLLARD LUMINAIRES IN FLARE DESIGNS





1  
ENDURA STYLE LANTERN FLARE Wall  
7W



2  
ENDURA STYLE LANTERN FLARE  
60CM Post 7W



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	---

ENDURA STYLE LANTERN FLARE Wall 7W	4058075478039	1	Dark gray	Aluminum	25 000	7.00	470	780	3 000	≥80	230
ENDURA STYLE LANTERN FLARE 60CM Post 7W	4058075478053	2	Dark gray	Aluminum	25 000	7.00	470	780	3 000	≥80	230

Product name	IP	l (mm)	b (mm)	h (mm)	∅ (mm)	kg
--------------	----	--------	--------	--------	--------	----

ENDURA STYLE LANTERN FLARE Wall 7W	IP44	12 500	98.0	68.0	331.0	-	4
ENDURA STYLE LANTERN FLARE 60CM Post 7W	IP44	12 500	-	-	604.0	110.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE PLATE WALL**

WITH AND WITHOUT SENSORS: WALL LUMINAIRES IN ATTRACTIVE STAINLESS STEEL DESIGNS





1  
ENDURA STYLE PLATE Wall Sensor  
12,5W



2  
ENDURA STYLE PLATE Wall  
12W



Product name	GTIN (EAN)	No.	MATERIAL	t[h] <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP	Icon
--------------	------------	-----	----------	-------------------	---	------------------------	------------------------------	---	-----	----	------

ENDURA STYLE PLATE Wall Sensor 12,5W	4058075477872	1	Steel	25000	12.50	630	1500	3000	≥80	IP44	12500
ENDURA STYLE PLATE Wall 12W	4058075477858	2	Steel	25000	12.00	600	1500	3000	≥80	IP44	12500

Product name	l [mm]	b [mm]	h [mm]	Icon
--------------	--------	--------	--------	------

ENDURA STYLE PLATE Wall Sensor 12,5W	60.0	180.0	283.0	4
ENDURA STYLE PLATE Wall 12W	54.0	180.0	280.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE PYRAMID

PURISTIC WALL AND BOLLARD LUMINAIRES WITH INDIRECT LIGHT





1  
ENDURA STYLE PYRAMID Wall  
9W



















2  
ENDURA STYLE PYRAMID  
80CM Post 9W



3  
ENDURA STYLE PYRAMID  
50CM Post 9W



Product name	GTIN (EAN)	 No.	 COLOR	 MATERIAL	 <sup>2</sup>	 W	 <sup>3</sup>	 <sup>4</sup>	 K	 CRI	
ENDURA STYLE PYRAMID Wall 9W	4058075477896	1	Steel	Stainless steel	25 000	9.00	600	1 000	3 000	≥80	90
ENDURA STYLE PYRAMID 80CM Post 9W	4058075477933	2	Steel	Stainless steel	25 000	9.00	600	1 000	3 000	≥80	90
ENDURA STYLE PYRAMID 50CM Post 9W	4058075477919	3	Steel	Stainless steel	25 000	9.00	600	1 000	3 000	≥80	90

Product name	 IP		 l (mm)	 b (mm)	 h (mm)	
ENDURA STYLE PYRAMID Wall 9W	IP44	12 500	125.0	100.0	100.0	4
ENDURA STYLE PYRAMID 80CM Post 9W	IP44	12 500	100.0	100.0	800.0	2
ENDURA STYLE PYRAMID 50CM Post 9W	IP44	12 500	100.0	100.0	500.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE CYLINDER

HIGH-QUALITY LED WALL, CEILING AND PATHWAY LUMINAIRES







1  
ENDURA STYLE Cylinder Wall Sensor  
6 W ST



2  
ENDURA STYLE Cylinder Wall  
6 W ST



3  
ENDURA STYLE Cylinder  
800 6 W ST



4  
ENDURA STYLE Cylinder  
500 6 W ST



5  
ENDURA STYLE Cylinder Ceiling  
6 W ST



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
ENDURA STYLE Cylinder Wall Sensor 6 W ST	4058075205352	1	Steel	Stainless steel	30 000	6.00	360	660	3 000	>80	IP44
ENDURA STYLE Cylinder Wall 6 W ST	4058075205338	2	Steel	Stainless steel	30 000	6.00	360	660	3 000	>80	IP44
ENDURA STYLE Cylinder 800 6 W ST	4058075205390	3	Steel	Stainless steel	30 000	6.00	360	660	3 000	>80	IP44
ENDURA STYLE Cylinder 500 6 W ST	4058075205376	4	Steel	Stainless steel	30 000	6.00	360	660	3 000	>80	IP44
ENDURA STYLE Cylinder Ceiling 6 W ST	4058075205413	5	Steel	Stainless steel	30 000	6.00	360	660	3 000	>80	IP44

Product name	l (mm)	w (mm)	h (mm)	Ø d (mm)	Weight (kg)
ENDURA STYLE Cylinder Wall Sensor 6 W ST	150.0	102.0	135.0	-	6
ENDURA STYLE Cylinder Wall 6 W ST	138.0	102.0	135.0	-	6
ENDURA STYLE Cylinder 800 6 W ST	-	-	800.0	102.0	2
ENDURA STYLE Cylinder 500 6 W ST	-	-	500.0	102.0	2
ENDURA STYLE Cylinder Ceiling 6 W ST	-	-	87.0	102.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE ELLIPSE

STYLISH LED LUMINAIRES FOR DIRECT LIGHT





1  
ENDURA STYLE Ellipse  
13 W DG



















2  
ENDURA STYLE Ellipse  
900 13 W DG



3  
ENDURA STYLE Ellipse  
500 13 W DG



Product name	GTIN (EAN)	 No.	 COLOR	 MATERIAL	 <sup>2</sup>	 W	 <sup>3</sup>	 <sup>4</sup>	 K	 CRI	
ENDURA STYLE Ellipse 13 W DG	4058075205079	1	Dark gray	Aluminum	30 000	12.50	950	1400	3000	>80	122
ENDURA STYLE Ellipse 900 13 W DG	4058075205116	2	Dark gray	Aluminum	30 000	12.50	950	1400	3000	>80	122
ENDURA STYLE Ellipse 500 13 W DG	4058075205093	3	Dark gray	Aluminum	30 000	12.50	950	1400	3000	>80	122

Product name	 IP		 [mm]	 [mm]	 [mm]	
ENDURA STYLE Ellipse 13 W DG	IP44	15 000	161.0	186.0	75.0	4
ENDURA STYLE Ellipse 900 13 W DG	IP44	15 000	75.0	186.0	900.0	2
ENDURA STYLE Ellipse 500 13 W DG	IP44	15 000	75.0	186.0	500.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE LANTERN MODERN

### MODERN LED LUMINAIRES WITH LIGHT GUIDE





1  
ENDURA STYLE Lantern Modern  
12 W DG



2  
ENDURA STYLE Lantern Modern  
900 12 W DG



3  
ENDURA STYLE Lantern Modern  
500 12 W DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
ENDURA STYLE Lantern Modern 12 W DG	4058075205017	1	Dark gray	Aluminum	30 000	11.50	610	900	3 000	>80	210
ENDURA STYLE Lantern Modern 900 12 W DG	4058075205055	2	Dark gray	Aluminum	30 000	11.50	610	900	3 000	>80	210
ENDURA STYLE Lantern Modern 500 12 W DG	4058075205031	3	Dark gray	Aluminum	30 000	11.50	610	900	3 000	>80	210

Product name	IP	l (mm)	w (mm)	h (mm)	d (mm)	Quantity	
ENDURA STYLE Lantern Modern 12 W DG	IP44	15 000	176.0	110.0	240.0	-	4
ENDURA STYLE Lantern Modern 900 12 W DG	IP44	15 000	-	-	900.0	110.0	2
ENDURA STYLE Lantern Modern 500 12 W DG	IP44	15 000	-	-	500.0	110.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE MIDI SPOT**

FLEXIBLE OUTDOOR WALL LED SPOTLIGHTS WITH  
ADJUSTABLE LUMINAIRE HEADS





1  
ENDURA STYLE Midi Spot II  
20 W DG



2  
ENDURA STYLE Midi Spot I  
13 W DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	---

ENDURA STYLE Midi Spot II 20 W DG	4058075205499	1	Dark gray	Aluminum	30 000	20.00	1 200	2 450	3 000	≥80	110
ENDURA STYLE Midi Spot I 13 W DG	4058075205475	2	Dark gray	Aluminum	30 000	12.50	800	1 450	3 000	≥80	110

Product name	IP	l (mm)	w (mm)	h (mm)	6
--------------	----	--------	--------	--------	---

ENDURA STYLE Midi Spot II 20 W DG	IP44	15 000	168.0	252.0	115.0	6
ENDURA STYLE Midi Spot I 13 W DG	IP44	15 000	162.0	125.0	128.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE MINI SPOT

FLEXIBLE LED LUMINAIRES FOR DIRECT LIGHT







1  
ENDURA STYLE Mini Spot II  
13 W DG



2  
ENDURA STYLE Mini Spot II  
13 W WT



3  
ENDURA STYLE Mini Spot I  
8 W DG



4  
ENDURA STYLE Mini Spot I  
8 W WT



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
ENDURA STYLE Mini Spot II 13 W DG	4058075205178	1	Dark gray	Aluminum	30 000	13.00	630	720	3 000	>80	IP44
ENDURA STYLE Mini Spot II 13 W WT	4058075205192	2	White	Aluminum	30 000	13.00	800	720	3 000	>80	IP44
ENDURA STYLE Mini Spot I 8 W DG	4058075205130	3	Dark gray	Aluminum	30 000	7.50	320	720	3 000	>80	IP44
ENDURA STYLE Mini Spot I 8 W WT	4058075205154	4	White	Aluminum	30 000	7.50	410	720	3 000	>80	IP44

Product name	l (mm)	w (mm)	h (mm)	Depth (mm)	
ENDURA STYLE Mini Spot II 13 W DG	15 000	100.0	230.0	54.0	6
ENDURA STYLE Mini Spot II 13 W WT	15 000	100.0	230.0	54.0	6
ENDURA STYLE Mini Spot I 8 W DG	15 000	100.0	110.0	54.0	6
ENDURA STYLE Mini Spot I 8 W WT	15 000	100.0	110.0	54.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE RING**

MULTIFACETED LED WALL AND CEILING LUMINAIRE





1  
ENDURA STYLE Ring RD  
13 W DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	----

ENDURA STYLE Ring RD 13 W DG	4058075205215	1	Dark gray	Aluminum	30 000	13.00	480	1450	3000	>80	IP44
------------------------------	---------------	---	-----------	----------	--------	-------	-----	------	------	-----	------

Product name	h (mm)	d (mm)	Weight
--------------	--------	--------	--------

ENDURA STYLE Ring RD 13 W DG	45.0	202.0	6
------------------------------	------	-------	---

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE SHIELD

UPDOWN LUMINAIRES IN FRESH DESIGN





1  
ENDURA STYLE Shield RD  
11 W DG



2  
ENDURA STYLE Shield SQ  
11 W DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	----

ENDURA STYLE Shield RD 11 W DG	4058075205291	1	Dark gray	Aluminum	30 000	10.50	400	1 150	3 000	>80	IP44
ENDURA STYLE Shield SQ 11 W DG	4058075205314	2	Dark gray	Aluminum	30 000	10.50	410	1 150	3 000	>80	IP44

Product name	Area (mm²)	l (mm)	w (mm)	h (mm)	Depth (mm)
--------------	------------	--------	--------	--------	------------

ENDURA STYLE Shield RD 11 W DG	15 000	60.0	240.0	142.0	6
ENDURA STYLE Shield SQ 11 W DG	15 000	60.0	240.0	142.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE SPOT ROUND

FLEXIBLE LED WALL LUMINAIRE FOR DIRECT LIGHT





1  
ENDURA STYLE Spot Round  
8 W DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
ENDURA STYLE Spot Round 8 W DG	4058075214095	1	Dark gray	Aluminum	30000	8.00	440	750	3000	>80	110

Product name	IP	l (mm)	w (mm)	h (mm)	U	
ENDURA STYLE Spot Round 8 W DG	IP44	15000	135.0	90.0	140.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE SQUARE** MULTIFACETED LED WALL AND CEILING LUMINAIRES







1  
ENDURA STYLE Square SQ  
13 W DG



2  
ENDURA STYLE Square SQ  
13 W WT



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	IP
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	----

ENDURA STYLE Square SQ 13 W DG	4058075205253	1	Dark gray	Aluminum	30 000	13.00	480	1450	3000	>80	IP44
ENDURA STYLE Square SQ 13 W WT	4058075205277	2	White	Aluminum	30 000	13.00	600	1450	3000	>80	IP44

Product name	Area (mm²)	l (mm)	w (mm)	h (mm)	Depth (mm)
--------------	------------	--------	--------	--------	------------

ENDURA STYLE Square SQ 13 W DG	15 000	202.0	202.0	45.0	6
ENDURA STYLE Square SQ 13 W WT	15 000	202.0	202.0	45.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE UPDOWN DECO**

OUTDOOR WALL LED LUMINAIRES WITH  
DISTINCTIVE LIGHTING DESIGN





1  
ENDURA STYLE UpDown Deco II  
11 W DG



2  
ENDURA STYLE UpDown Deco I  
6 W DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
--------------	------------	-----	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	---

ENDURA STYLE UpDown Deco II 11 W DG	4058075205543	1	Dark gray	Aluminum	30 000	10.50	550	940	3 000	≥80	55
ENDURA STYLE UpDown Deco I 6 W DG	4058075205529	2	Dark gray	Aluminum	30 000	6.00	280	500	3 000	≥80	55

Product name	IP	l (mm)	w (mm)	h (mm)	mm
--------------	----	--------	--------	--------	----

ENDURA STYLE UpDown Deco II 11 W DG	IP44	100 000	50.0	140.0	130.0	6
ENDURA STYLE UpDown Deco I 6 W DG	IP44	100 000	50.0	100.0	130.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE UPDOWN FLEX**

OUTDOOR WALL LED LUMINAIRES WITH  
ADJUSTABLE LUMINAIRE HEADS





1  
ENDURA STYLE UpDown Flex  
13 W DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
ENDURA STYLE UpDown Flex 13 W DG	4058075205437	1	Dark gray	Aluminum	30000	12.50	700	1450	3000	≥80	110

Product name	IP	l (mm)	w (mm)	h (mm)	U	
ENDURA STYLE UpDown Flex 13 W DG	IP44	15000	94.0	65.0	220.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE UPDOWN** LED WALL LUMINAIRES IN CLASSIC DESIGN





1  
ENDURA STYLE UpDown  
12 W AL













2  
ENDURA STYLE UpDown  
12 W DG



3  
ENDURA STYLE UpDown  
12 W WT



Product name	GTIN (EAN)	 No.	 COLOR	 MATERIAL	 <sup>2</sup>		 <sup>3</sup>	 <sup>4</sup>			
ENDURA STYLE UpDown 12 W AL	4058075205604	1	Aluminum	Aluminum	30 000	11.50	700	1050	3000	≥80	110
ENDURA STYLE UpDown 12 W DG	4058075214057	2	Dark gray	Aluminum	30 000	11.50	700	1050	3000	>80	110
ENDURA STYLE UpDown 12 W WT	4058075214071	3	White	Aluminum	30 000	11.50	700	1050	3000	>80	110

Product name						
ENDURA STYLE UpDown 12 W AL	IP44	15 000	55.0	90.0	160.0	6
ENDURA STYLE UpDown 12 W DG	IP44	15 000	55.0	90.0	160.0	6
ENDURA STYLE UpDown 12 W WT	IP44	15 000	55.0	90.0	160.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE UPDOWN PUCK** POWERFUL OUTDOOR WALL LED LUMINAIRES







1  
ENDURA STYLE UpDown Puck  
13 W DG



2  
ENDURA STYLE UpDown Puck  
13 W WT



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
ENDURA STYLE UpDown Puck 13 W DG	4058075205567	1	Dark gray	Aluminum	30 000	12.50	980	1450	3000	≥80	110
ENDURA STYLE UpDown Puck 13 W WT	4058075205581	2	White	Aluminum	30 000	12.50	980	1450	3000	≥80	110

Product name	IP	l (mm)	w (mm)	h (mm)	Quantity	
ENDURA STYLE UpDown Puck 13 W DG	IP44	15000	131.0	91.0	110.0	6
ENDURA STYLE UpDown Puck 13 W WT	IP44	15000	131.0	91.0	110.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## ENDURA® STYLE WALL

SLIM LED WALL LUMINAIRES WITH OR WITHOUT SENSOR





1  
ENDURA STYLE Wall Sensor  
12 W DG



3  
ENDURA STYLE Wall  
12 W DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°
--------------	------------	-----	-------	----------	-------------------	---	---------------------------	---------------------------------	---	-----	---

ENDURA STYLE Wall Sensor 12 W DG	4058075214170	1	Dark gray	Aluminum	30 000	12.20	740	950	3 000	>80	107
ENDURA STYLE Wall 12 W DG	4058075214132	3	Dark gray	Aluminum	30 000	11.50	740	950	3 000	>80	107

Product name	IP	l (mm)	w (mm)	h (mm)	Qty
--------------	----	--------	--------	--------	-----

ENDURA STYLE Wall Sensor 12 W DG	IP44	15 000	168.0	100.0	273.0	4
ENDURA STYLE Wall 12 W DG	IP44	15 000	168.0	100.0	273.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE WALL WIDE SENSOR**

OUTDOOR WALL LED LUMINAIRE WITH  
DAYLIGHT AND MOTION SENSOR





1  
ENDURA STYLE Wall Wide Sensor  
12W DG




Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<sup>2</sup>	W	<sup>3</sup>	<sup>4</sup>	K	CRI	
ENDURA STYLE Wall Wide Sensor 12W DG	4058075205666	1	Dark gray	Aluminum	30000	12.00	750	900	3000	≥80	106

Product name						
ENDURA STYLE Wall Wide Sensor 12W DG	IP44	15000	118.0	176.0	212.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® STYLE WIDE** LED WALL LUMINAIRES IN CLASSIC SHAPE

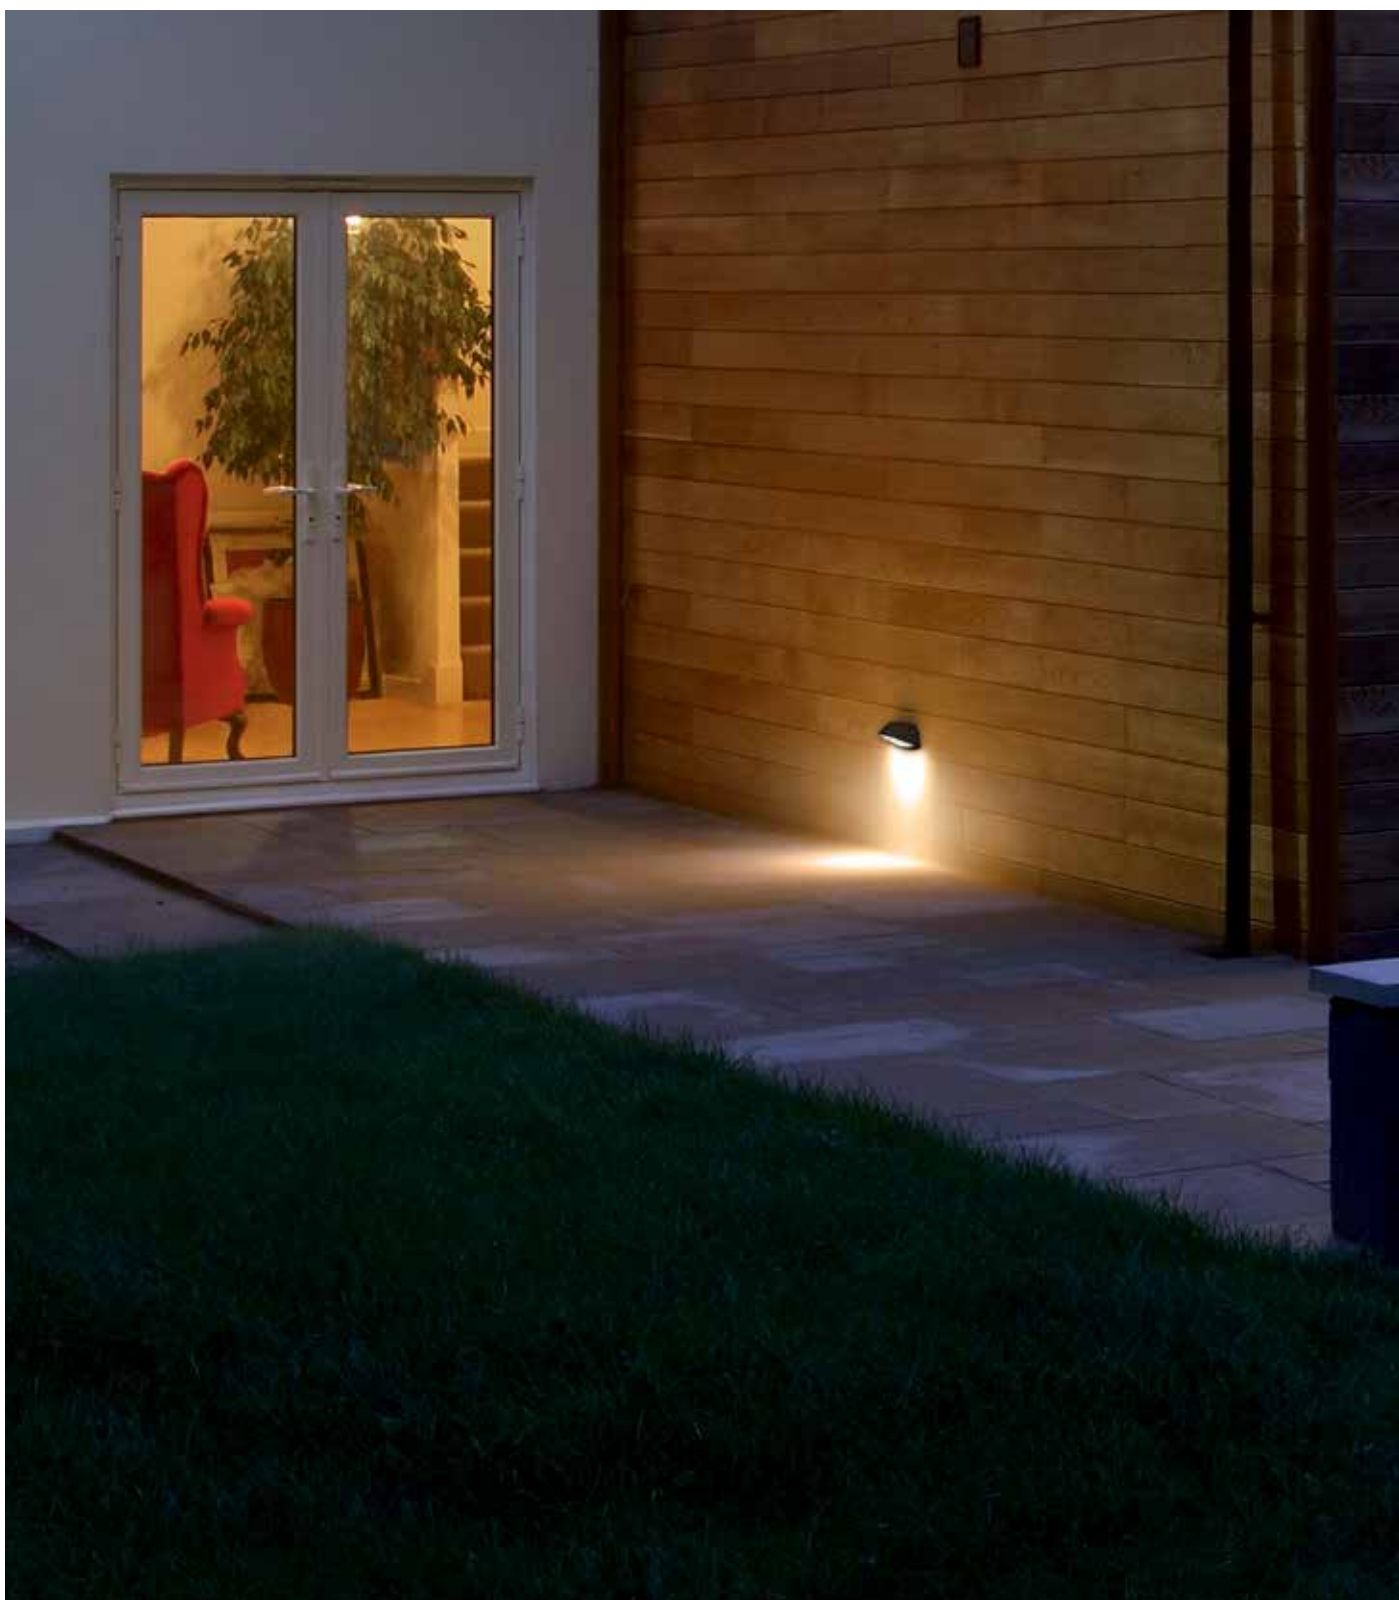



1  
ENDURA STYLE Wide  
12 W DG



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<sup>2</sup>	W	<sup>3</sup>	<sup>4</sup>	K	CRI	IP
ENDURA STYLE Wide 12 W DG	4058075214019	1	Dark gray	Aluminum	30 000	12.00	530	1220	3000	>80	IP44

Product name		(mm)	(mm)	(mm)	
ENDURA STYLE Wide 12 W DG	15 000	86.0	210.0	90.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® CLASSIC PIPE AMBER**

OUTDOOR LUMINAIRE FAMILY WITH GLASS DIFFUSER IN ELEGANT AMBER – FOR LED LAMPS WITH E27 BASE







1  
ENDURA CLASSIC PIPE Wall  
E27

ALU



2  
ENDURA CLASSIC PIPE  
80cm Post E27

STAINLESS  
STEEL



3  
ENDURA CLASSIC PIPE  
50cm Post E27

STAINLESS  
STEEL



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	d [mm]	Quantity
ENDURA CLASSIC PIPE Wall E27	4058075554214	1	Dark gray	Aluminum	IP44	129.0	90.0	197.0	-	4
ENDURA CLASSIC PIPE 80CM Post E27	4058075554252	2	Dark gray	Stainless Steel	IP44	-	-	800.0	135.0	2
ENDURA CLASSIC PIPE 50CM Post E27	4058075554238	3	Dark gray	Stainless Steel	IP44	-	-	500.0	135.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## **ENDURA® CLASSIC CASCADE AMBER**

OUTDOOR LUMINAIRE FAMILY WITH AMBER-COATED GLASS DIFFUSERS – FOR LED LAMPS WITH E27 BASE





1  
ENDURA CLASSIC CASCADE  
80cm Post E27 AMB



2  
ENDURA CLASSIC CASCADE  
50cm Post E27 AMB



3  
ENDURA CLASSIC CASCADE Wall  
E27 AMB




Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	
ENDURA CLASSIC CASCADE 80CM Post E27 AMB	4058075554313	1	Dark gray	Aluminum	IP44	200.0	160.0	800.0	2
ENDURA CLASSIC CASCADE 50CM Post E27 AMB	4058075554290	2	Dark gray	Aluminum	IP44	200.0	160.0	500.0	2
ENDURA CLASSIC CASCADE Wall E27 AMB	4058075554276	3	Dark gray	Aluminum	IP44	160.0	120.0	180.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## **ENDURA® CLASSIC CASCADE CLEAR**

OUTDOOR LUMINAIRE FAMILY WITH TRANSPARENT GLASS DIFFUSERS – FOR LED LAMPS WITH E27 BASE

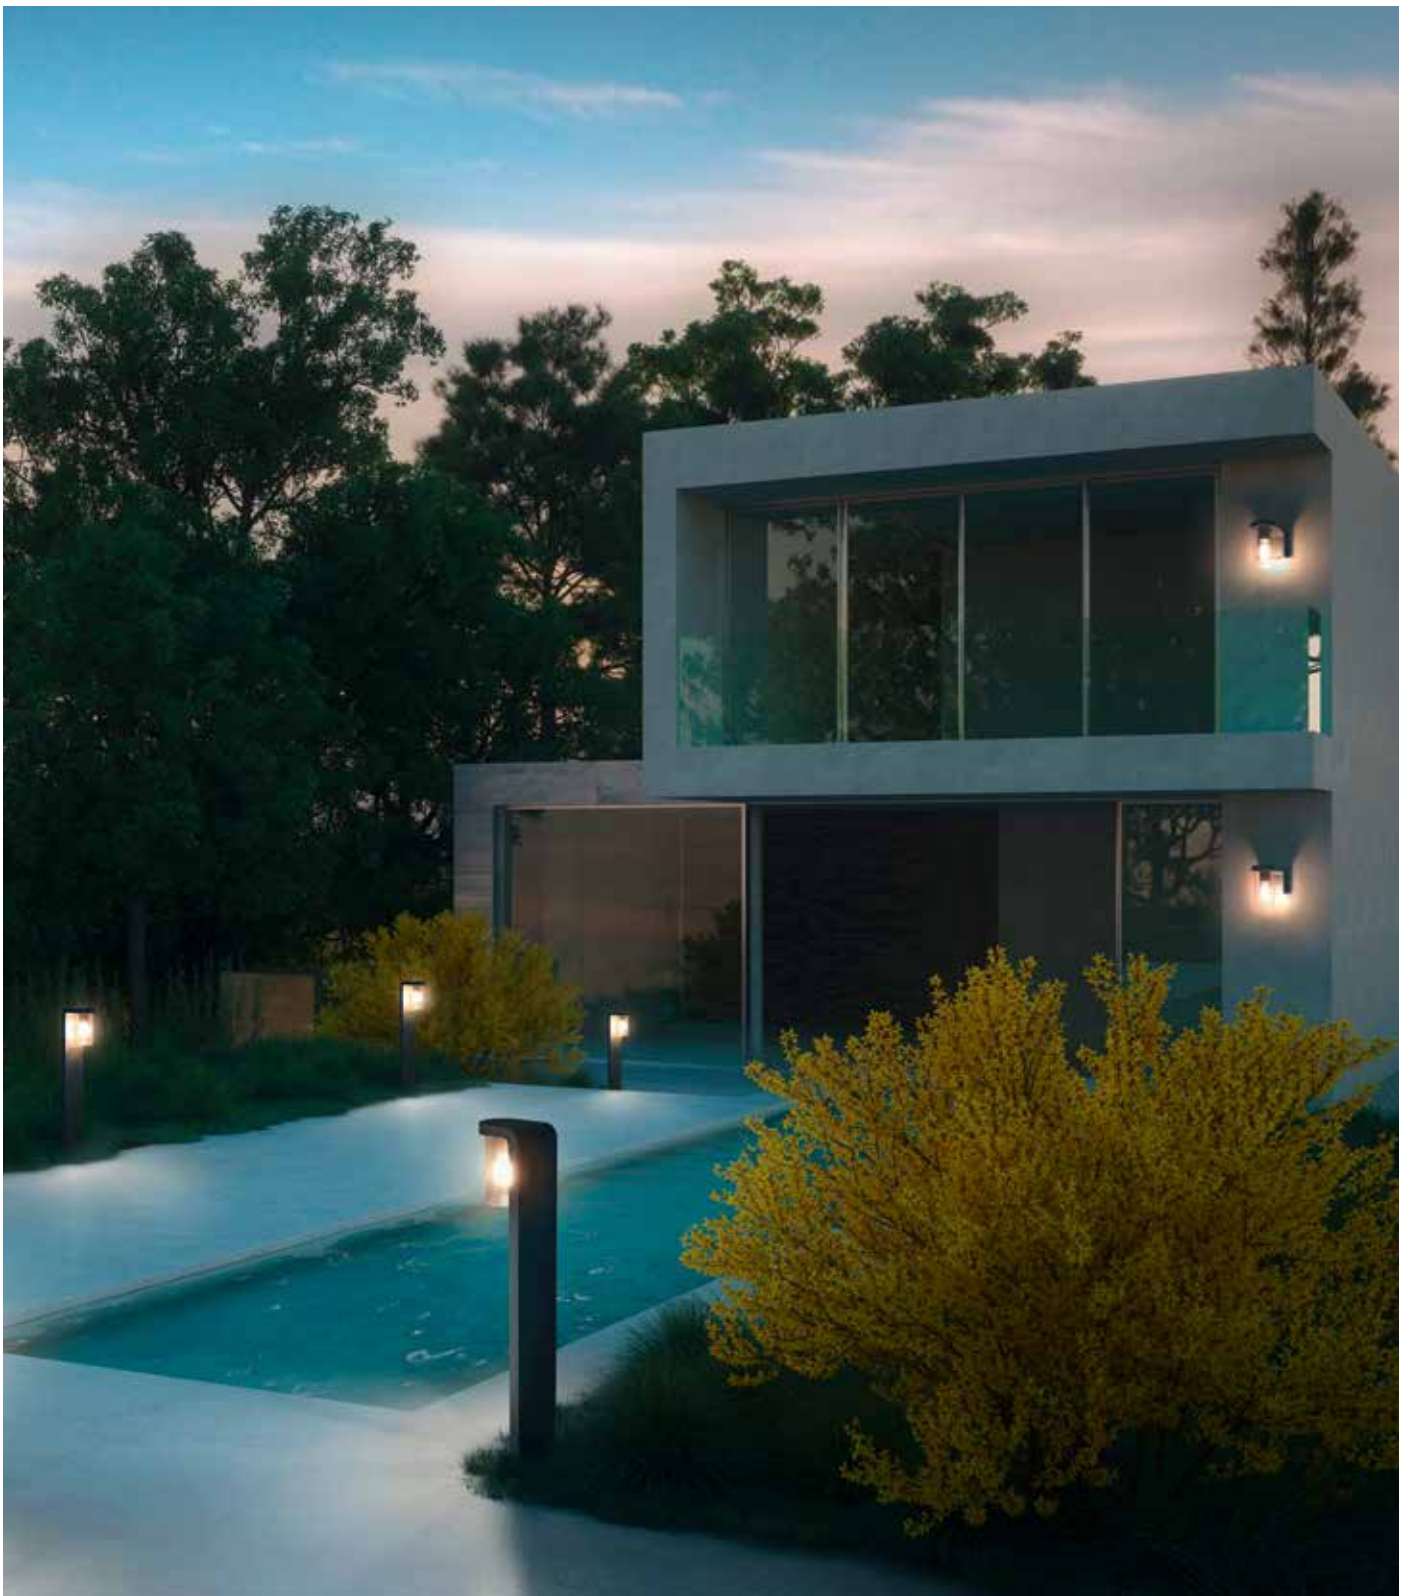



1  
ENDURA CLASSIC CASCADE  
80cm Post E27 CLR



2  
ENDURA CLASSIC CASCADE  
50cm Post E27 CLR



3  
ENDURA CLASSIC CASCADE Wall  
E27 CLR



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	
ENDURA CLASSIC CASCADE 80CM Post E27 CLR	4058075554375	1	Dark gray	Aluminum	IP44	200.0	160.0	800.0	2
ENDURA CLASSIC CASCADE 50CM Post E27 CLR	4058075554351	2	Dark gray	Aluminum	IP44	200.0	160.0	500.0	2
ENDURA CLASSIC CASCADE Wall E27 CLR	4058075554337	3	Dark gray	Aluminum	IP44	160.0	120.0	180.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## ENDURA® CLASSIC FRAME

OUTDOOR LUMINAIRE FAMILY IN A CLASSIC FRAME DESIGN –  
FOR LED LAMPS WITH E27 BASE





1  
ENDURA CLASSIC FRAME Wall E27



2  
ENDURA CLASSIC FRAME  
80cm Post E27



3  
ENDURA CLASSIC FRAME  
60cm Post E27




Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	
ENDURA CLASSIC FRAME Wall E27	4058075554399	1	Dark gray	Aluminum	IP44	140.0	110.0	245.0	4
ENDURA CLASSIC FRAME 80CM Post E27	4058075554436	2	Dark gray	Aluminum	IP44	110.0	110.0	800.0	2
ENDURA CLASSIC FRAME 60CM Post E27	4058075554412	3	Dark gray	Aluminum	IP44	110.0	110.0	600.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## **ENDURA® CLASSIC CANNON WALL**

ELEGANT OUTDOOR WALL LUMINAIRES IN A PURIST BARREL DESIGN – FOR LED LAMPS WITH GU10 BASE

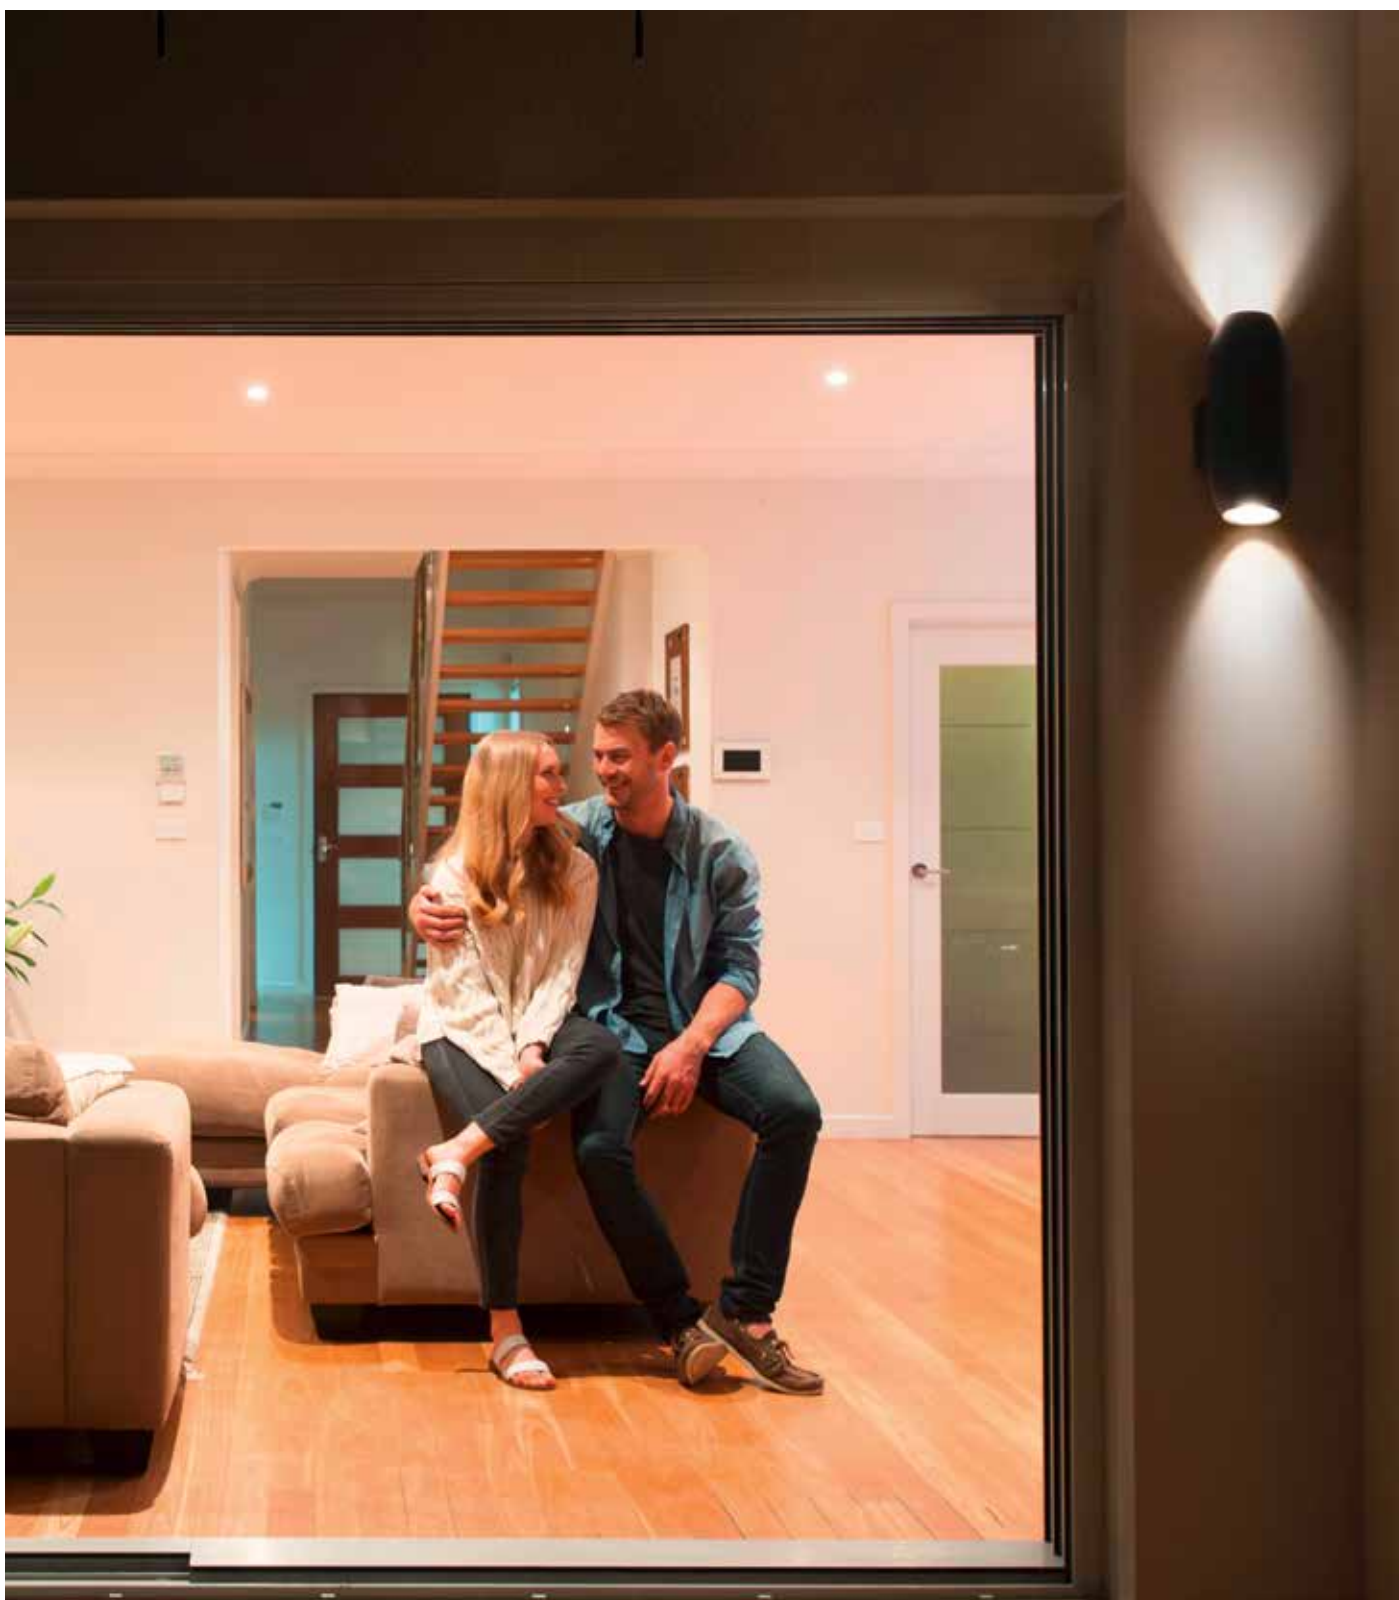





1  
ENDURA CLASSIC CANNON Wall up  
GU10



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	Quantity
ENDURA CLASSIC CANNON Wall up GU10	4058075554474	2	Dark gray	Aluminum	IP44	90.0	75.0	120.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## ENDURA® CLASSIC BEAM WALL

STYLISH OUTDOOR WALL LUMINAIRES WITH LIGHT OUTPUT UPWARD AND DOWNWARD – FOR LED LAMPS WITH GU10 BASE





1  
ENDURA CLASSIC BEAM GAP wall updown  
GU10



2  
ENDURA CLASSIC BEAM Wall updown  
GU10



3  
ENDURA CLASSIC BEAM GAP wall down  
GU10



4  
ENDURA CLASSIC BEAM Wall down  
GU10



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	
ENDURA CLASSIC BEAM GAP wall updown GU10	4058075554559	1	Dark gray	Aluminum	IP44	104.0	92.0	233.0	4
ENDURA CLASSIC BEAM Wall updown GU10	4058075554573	2	Dark gray	Aluminum	IP44	104.0	92.0	200.0	4
ENDURA CLASSIC BEAM GAP wall down GU10	4058075554511	3	Dark gray	Aluminum	IP44	104.0	92.0	163.0	4
ENDURA CLASSIC BEAM Wall down GU10	4058075554535	4	Dark gray	Aluminum	IP44	104.0	92.0	146.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## ENDURA® CLASSIC CALICE

WALL AND BOLLARD LUMINAIRES WITH GLAS DIFFUSOR AND ELEGANT STAINLESS STEEL HOUSING





1  
ENDURA CLASSIC CALICE WALL Sensor E27



2  
ENDURA CLASSIC CALICE WALL E27 ST



3  
ENDURA CLASSIC CALICE 80CM Post E27



4  
ENDURA CLASSIC CALICE 50CM Post E27



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	d [mm]	
ENDURA CLASSIC CALICE WALL Sensor E27	4058075477971	1	Steel	Stainless steel	IP44	161.0	120.0	305.0	-	4
ENDURA CLASSIC CALICE WALL E27 ST	4058075477957	2	Steel	Stainless steel	IP44	161.0	120.0	290.0	-	4
ENDURA CLASSIC CALICE 80CM Post E27	4058075478015	3	Steel	Stainless steel	IP44	-	-	800.0	120.0	2
ENDURA CLASSIC CALICE 50CM Post E27	4058075477995	4	Steel	Stainless steel	IP44	-	-	500.0	120.0	2

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## **ENDURA® CLASSIC ROTARY UPDOWN**

OUTDOOR WALL LIGHTS WITH ROTATABLE ALUMINUM HOUSING FOR GU10 LIGHT SOURCES





1  
ENDURA® CLASSIC ROTARY UPDOWN




Product name	GTIN (EAN)	Lightbulb No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	Quantity
ENDURA® CLASSIC ROTARY UPDOWN	4058075763449	1	Dark	Aluminum/Steel	IP44	69.0	112.0	175.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## **ENDURA® CLASSIC GARDEN SPOT SPIKE**

GARDEN SPIKE SPOTLIGHT MADE OF DIE-CAST ALUMINUM WITH MOVABLE LUMINAIRE HEAD AND GU10 BASE

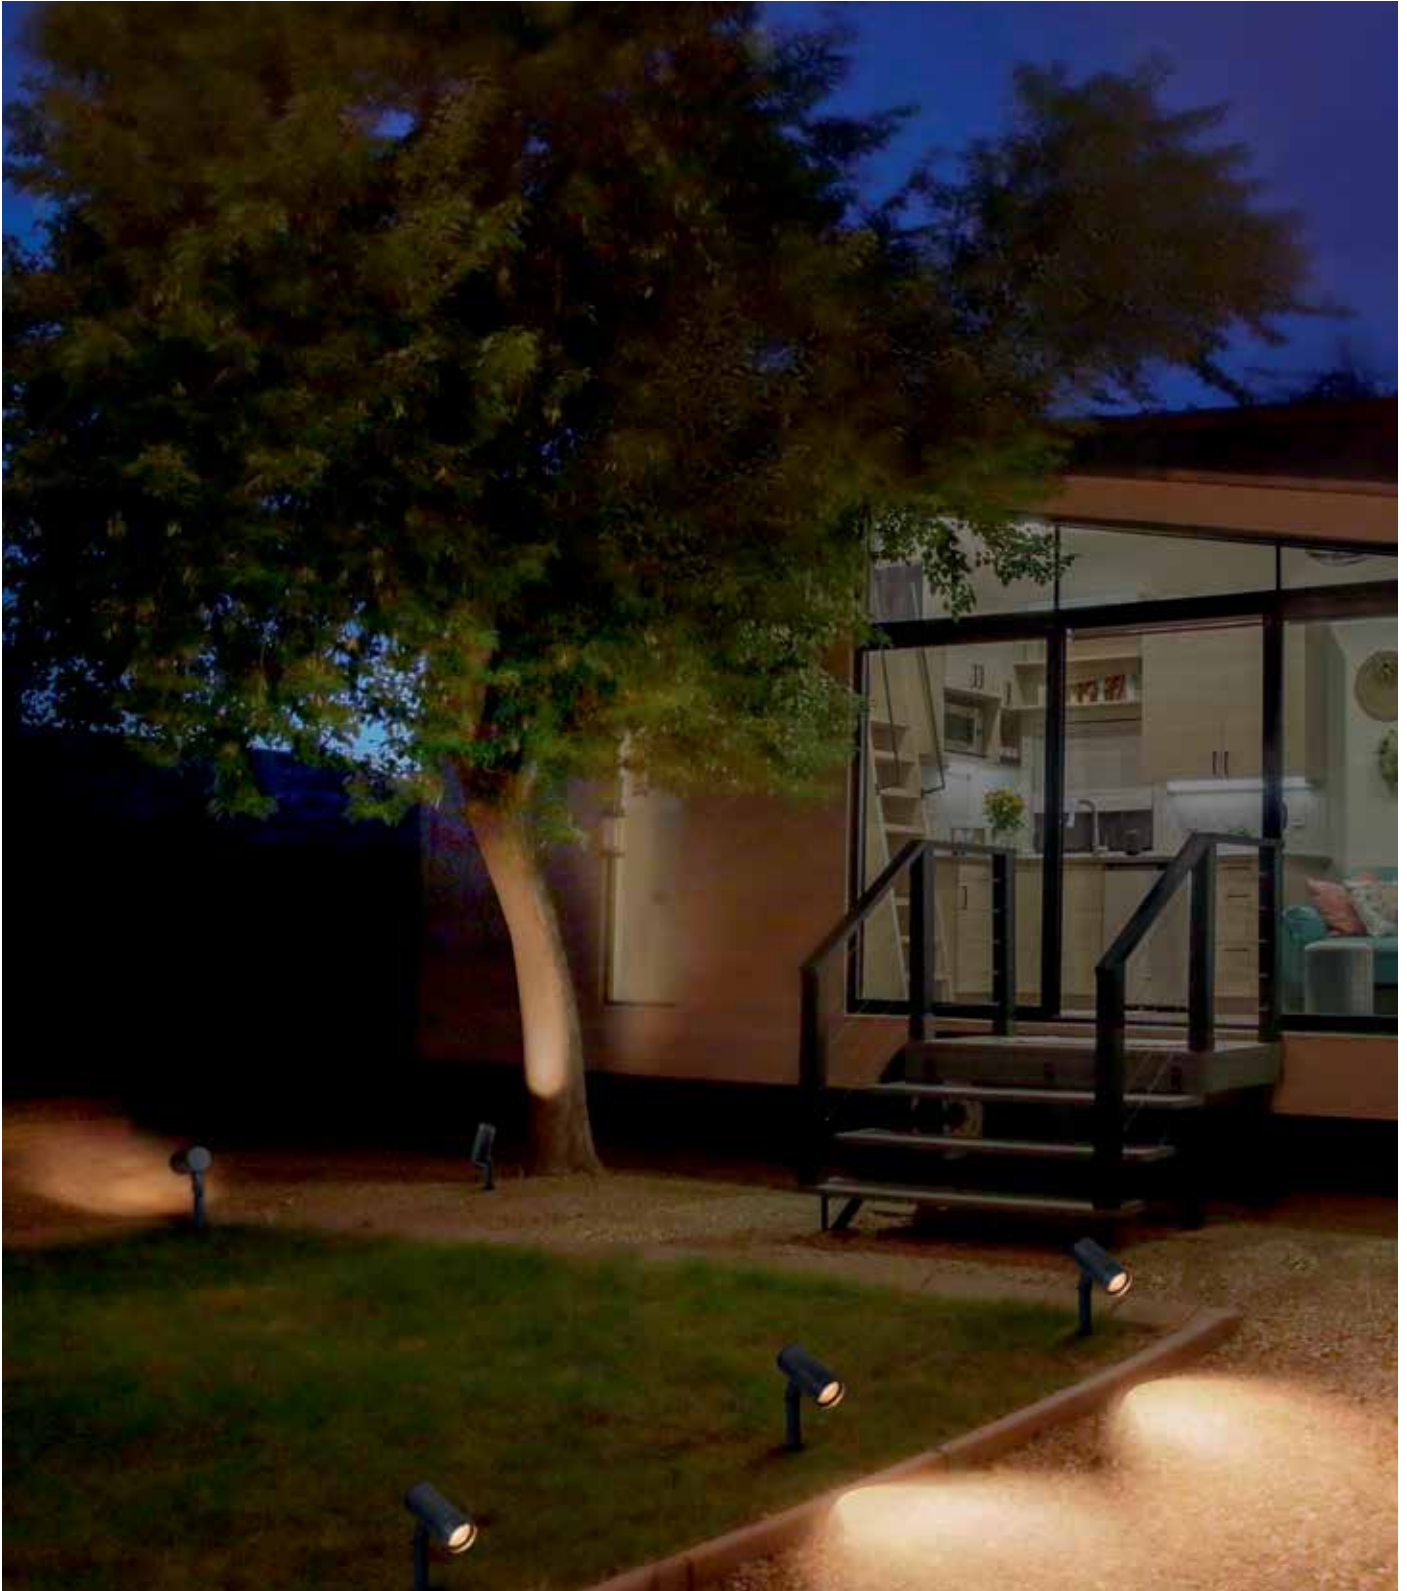





1  
ENDURA CLASSIC GARDN SPOTSPIKE  
GU10



Product name

GTIN (EAN)



ENDURA CLASSIC GARDN SPOTSPIKE GU10

4058075763548

1

Aluminum

IP54

65.0

130.0

415.0

4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## ENDURA® CLASSIC CUBE ADJUST

CLASSIC OUTDOOR WALL LIGHTS WITH GU10 BASE AND ADJUSTABLE HEAD





1  
ENDURA CLASSIC CUBE Black



2  
ENDURA CLASSIC CUBE Silver



3  
ENDURA CLASSIC CUBE White




Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	
ENDURA CLASSIC CUBE Black	4058075763562	1	Black	Aluminum	IP44	66.0	93.0	100.0	6
ENDURA CLASSIC CUBE Silver	4058075763586	2	Silver	Aluminum	IP44	66.0	93.0	100.0	6
ENDURA CLASSIC CUBE White	4058075763609	3	White	Aluminum	IP44	66.0	93.0	100.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## **ENDURA® CLASSIC SQUARE**

OUTDOOR WALL LIGHTS IN CLASSIC DESIGN FOR GU10 LIGHT SOURCES

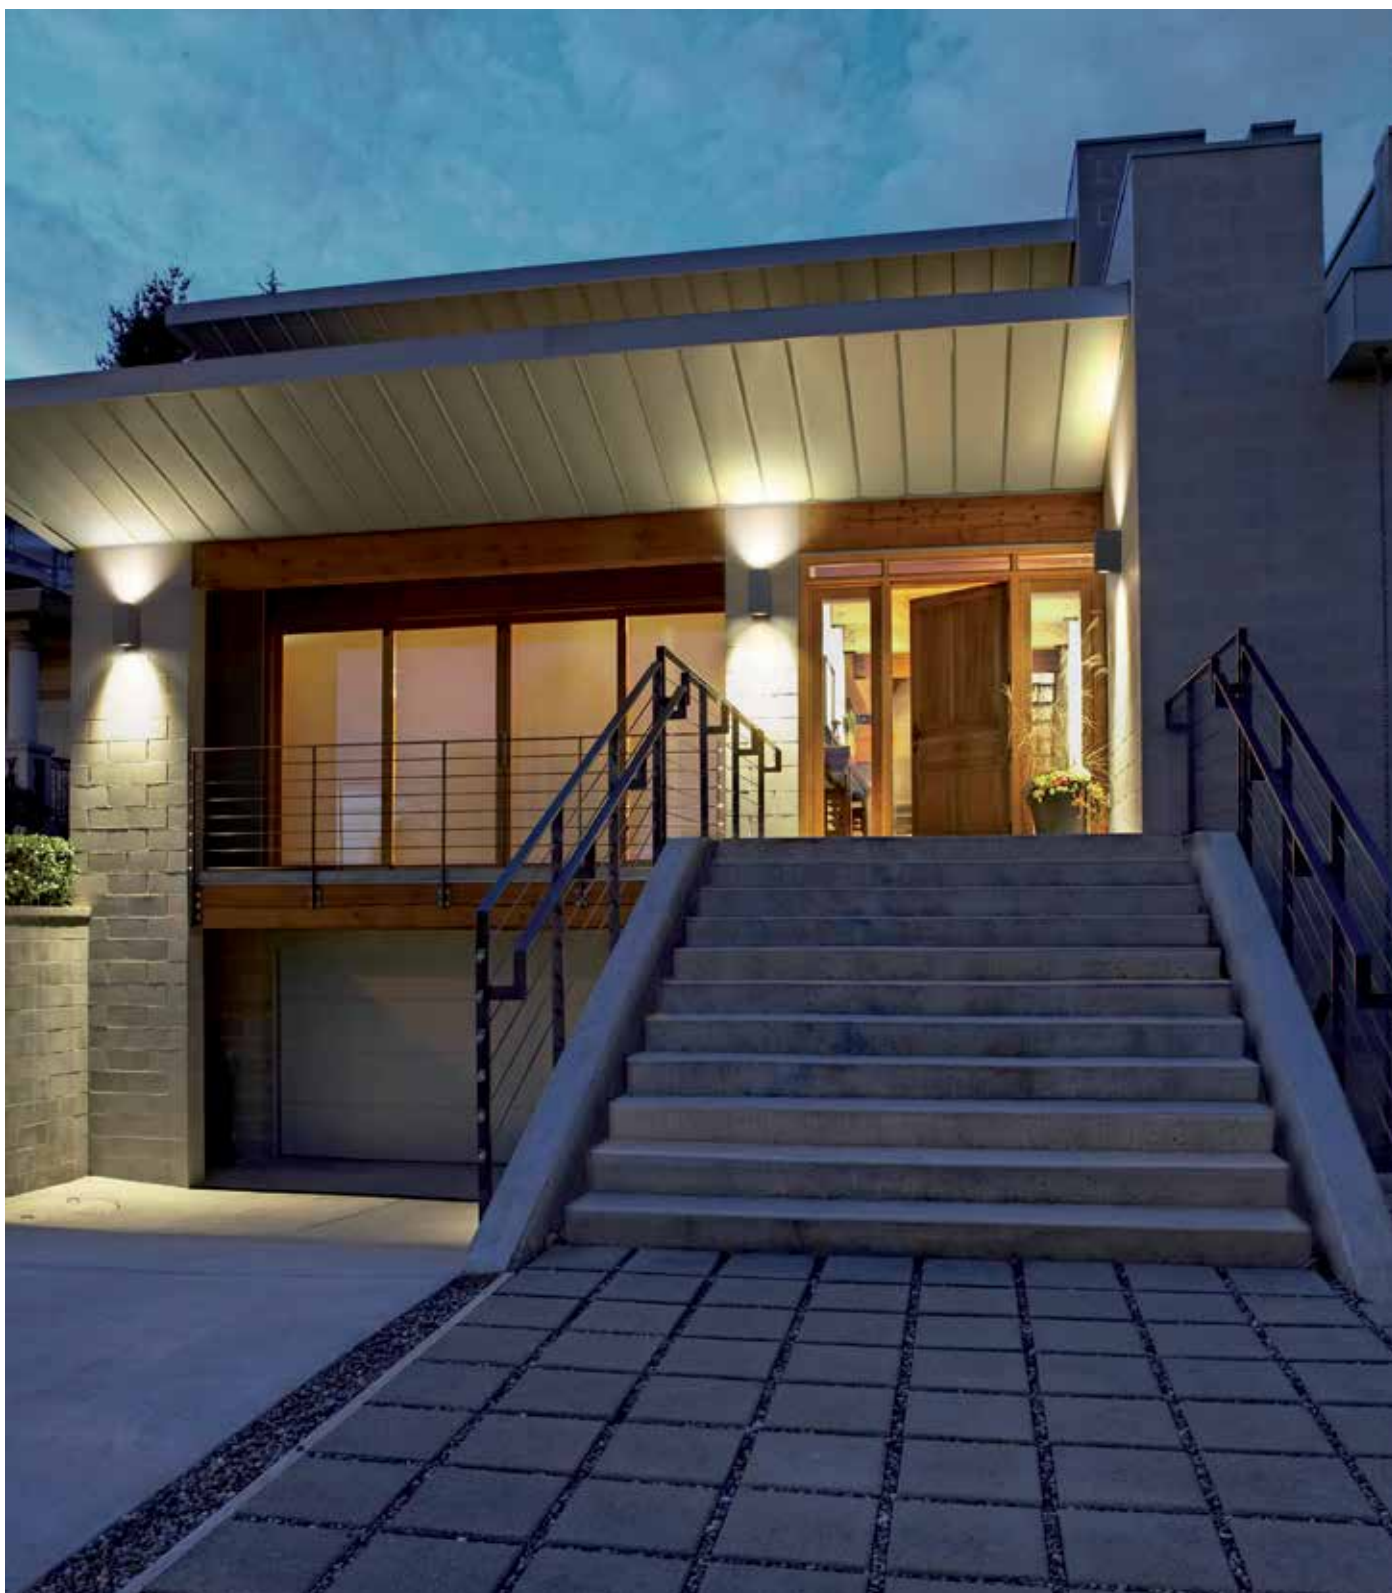



1  
ENDURA CLASSIC SQUARE UpDown black



2  
ENDURA CLASSIC SQUARE UpDown white



3  
ENDURA CLASSIC SQUARE Down black




4  
ENDURA CLASSIC SQUARE Down white



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	b [mm]	h [mm]	
ENDURA CLASSIC SQUARE UpDown black	4058075763647	1	Black	Aluminum	IP44	68.0	150.0	92.0	6
ENDURA CLASSIC SQUARE UpDown white	4058075763685	2	White	Aluminum	IP44	68.0	150.0	92.0	6
ENDURA CLASSIC SQUARE Down black	4058075763623	3	Black	Aluminum	IP44	68.0	81.0	92.0	6
ENDURA CLASSIC SQUARE Down white	4058075763661	4	White	Aluminum	IP44	68.0	81.0	92.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

**ENDURA® CLASSIC LANTERN CYLINDER**  
CYLINDRICAL SHAPED WALL LUMINAIRES WITH  
GLASS DIFFUSOR AND E27 BASE

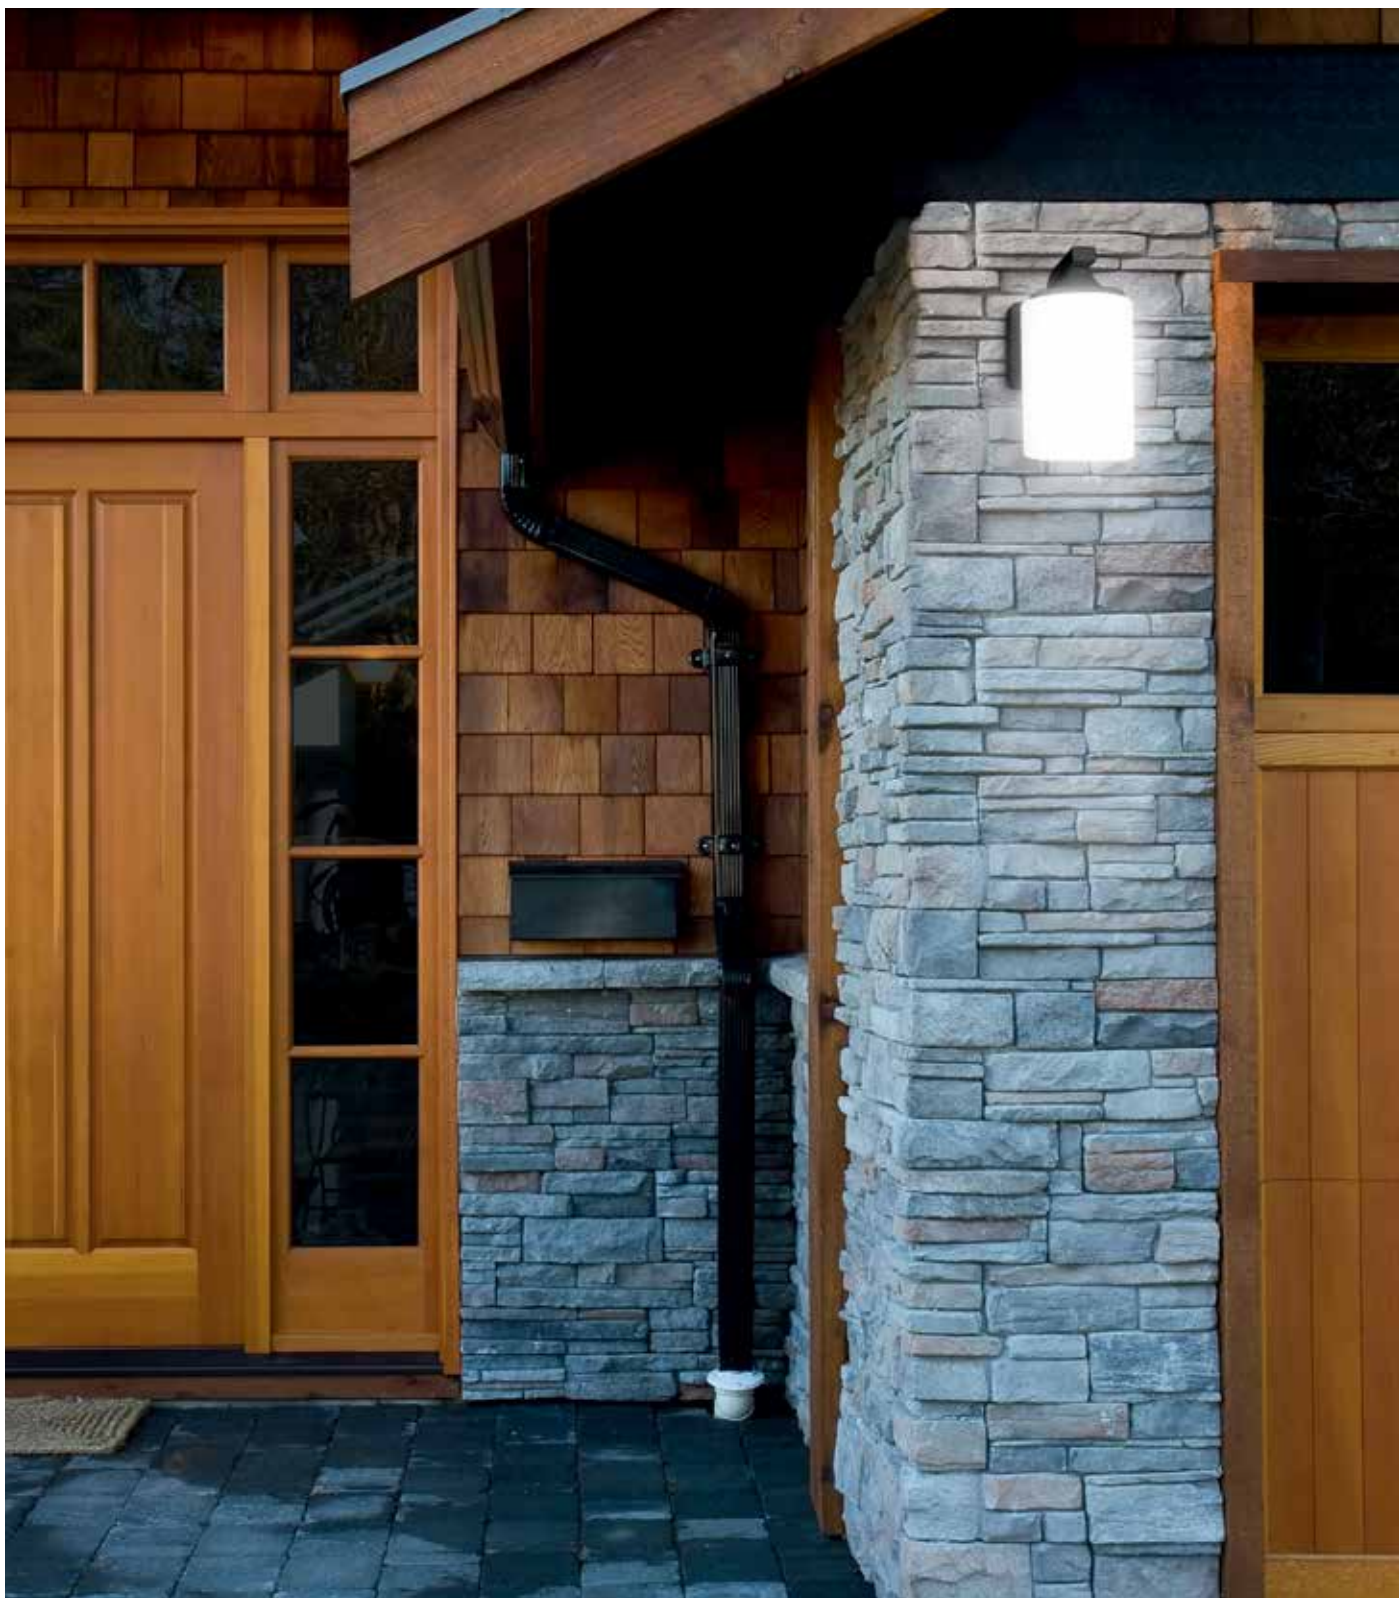



1  
ENDURA CLASSIC Lantern Cylinder  
E27 WD



2  
ENDURA CLASSIC Lantern Cylinder  
E27 WT



3  
ENDURA CLASSIC Lantern Cylinder  
E27 BK



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l (mm)	w (mm)	h (mm)	Icons
ENDURA CLASSIC Lantern Cylinder E27 WD	4058075392625	1	WOOD DECOR	Aluminum	IP43	210.0	118.0	212.0	4
ENDURA CLASSIC Lantern Cylinder E27 WT	4058075392649	2	White	Aluminum	IP43	210.0	118.0	212.0	4
ENDURA CLASSIC Lantern Cylinder E27 BK	4058075392663	3	Black	Aluminum	IP43	210.0	118.0	212.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## **ENDURA® CLASSIC LANTERN**

TIMELESS LANTERNS WITH E27 BASE







1  
ENDURA CLASSIC Lantern SQ M  
E27 BK



2  
ENDURA CLASSIC Lantern SQ S  
E27 BK



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	w [mm]	h [mm]	Icons
ENDURA CLASSIC Lantern SQ M E27 BK <sup>3</sup>	4058075206649	1	Black	Aluminum	IP23	150.0	105.0	293.0	6
ENDURA CLASSIC Lantern SQ S E27 BK <sup>3</sup>	4058075206625	2	Black	Aluminum	IP23	150.0	105.0	225.0	6

<sup>3</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## ENDURA® CLASSIC POST

TIMELESS STAINLESS STEEL OUTDOOR LUMINAIRES  
WITH E27 BASE





1  
ENDURA CLASSIC Post Down  
E27 ST



2  
ENDURA CLASSIC Post Up  
E27 ST



3  
ENDURA CLASSIC Post Up Sensor  
E27 ST



4  
ENDURA CLASSIC Post  
550 E27 ST



5  
ENDURA CLASSIC Post  
800 E27 ST



Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	w [mm]	h [mm]	Ø d [mm]	Icons
ENDURA CLASSIC Post Down E27 ST <sup>3</sup>	4058075206526	1	Steel	Stainless steel	IP44	212.0	127.0	195.0	-	4
ENDURA CLASSIC Post Up E27 ST <sup>3</sup>	4058075206502	2	Steel	Stainless steel	IP44	212.0	127.0	193.0	-	4
ENDURA CLASSIC Post Up Sensor E27 ST <sup>3</sup>	4058075206540	3	Steel	Stainless steel	IP44	212.0	127.0	193.0	-	4
ENDURA CLASSIC Post 550 E27 ST <sup>3</sup>	4058075206564	4	Steel	Stainless steel	IP44	-	-	550.0	127.0	4
ENDURA CLASSIC Post 800 E27 ST <sup>3</sup>	4058075206588	5	Steel	Stainless steel	IP44	-	-	127.0	800.0	4

<sup>3</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## ENDURA® CLASSIC TRADITION ALU

CLASSIC OUTDOOR LUMINAIRES MADE FROM ALUMINUM WITH E27 BASE





1  
ENDURA CLASSIC Trad Alu Up Sensor E27 GD



2  
ENDURA CLASSIC Trad Alu Up E27 GD



3  
ENDURA CLASSIC Trad Alu Down E27 GD



4  
ENDURA CLASSIC Trad Alu 1000 E27 BK/GD



5  
ENDURA CLASSIC Trad Alu 330 E27 GD





Product name	GTIN (EAN)	No.	COLOR	MATERIAL	IP	l [mm]	w [mm]	h [mm]	
ENDURA CLASSIC Trad Alu Up Sensor E27 GD <sup>3</sup>	4058075206281	1	Black/Gold	Aluminum	IP44	230.0	170.0	280.0	4
ENDURA CLASSIC Trad Alu Up E27 GD <sup>3</sup>	4058075206229	2	Black/Gold	Aluminum	IP44	230.0	170.0	260.0	4
ENDURA CLASSIC Trad Alu Down E27 GD <sup>3</sup>	4058075206168	3	Black/Gold	Aluminum	IP44	230.0	170.0	230.0	4
ENDURA CLASSIC Trad Alu 1000 E27 GD <sup>3</sup>	4058075206380	4	Black/Gold	Aluminum	IP44	170.0	170.0	1000.0	4
ENDURA CLASSIC Trad Alu 330 E27 GD <sup>3</sup>	4058075206342	5	Black/Gold	Aluminum	IP44	170.0	170.0	325.0	4

<sup>3</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee)

## **ENDURA® GARDEN DOT**

SMALL GARDEN SPOTLIGHTS FOR AESTHETIC ACCENT LIGHTING –  
WITH REMOVABLE GROUND STAKES

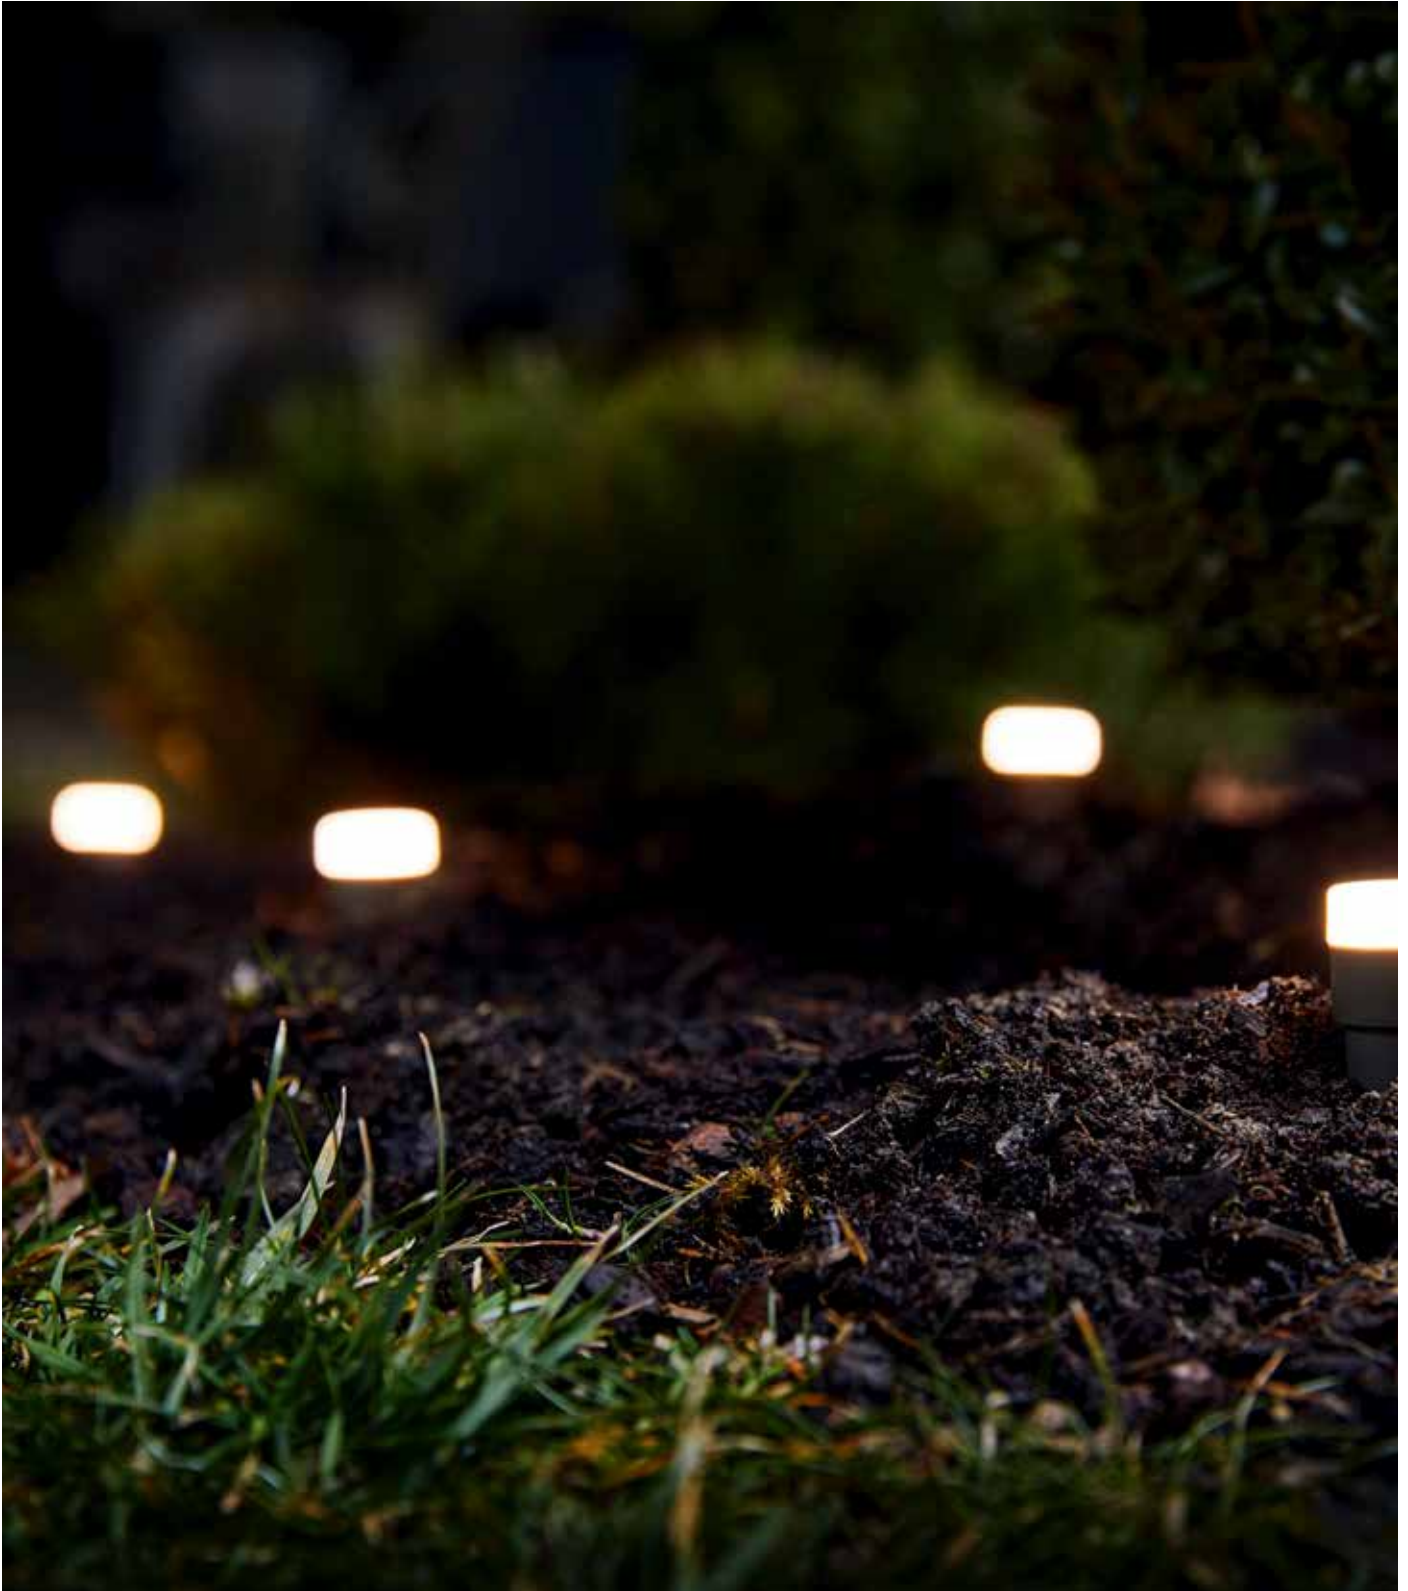



1  
ENDURA GARDEN  
18 Dot 12W



2  
ENDURA GARDEN  
9 Dot 6W



3  
ENDURA GARDEN  
3 Dot extension 2,1 W



Product name	GTIN (EAN)	No.	MATERIAL	t <sub>in</sub> <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°	IP
ENDURA GARDEN 18 Dot 12W	4058075478473	1	Plastic (PC)	25000	12.00	850	1260	3000	≥80	33	IP65
ENDURA GARDEN 9 Dot 6W	4058075478411	2	Plastic (PC)	25000	6.00	480	630	3000	≥80	33	IP65
ENDURA GARDEN 3 Dot extension 2,1 W	4058075478510	3	Plastic (PC)	25000	2.10	160	210	3000	≥80	33	IP65

Product name	b [mm]	h [mm]	d [mm]	Quantity	
ENDURA GARDEN 18 Dot 12W	12500	23.0	96.0	23.0	4
ENDURA GARDEN 9 Dot 6W	12500	23.0	96.0	23.0	4
ENDURA GARDEN 3 Dot extension 2,1 W	12500	23.0	96.0	23.0	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## NEON FLEX

FLEXIBLE LED STRIPS WITH A PARTICULARLY HOMOGENEOUS WARM WHITE LIGHT IN A NEON LOOK – FOR INDOORS AND OUTDOORS







1  
NEON FLEX



Product name	GTIN (EAN)	No.	MATERIAL	t[h] <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	°	IP
--------------	------------	-----	----------	-------------------	---	------------------------	------------------------------	---	-----	---	----

NEON FLEX 5M	4058075504721	1	Silicone	30000	29.00	1700	3100	3000	>80	110	IP44
NEON FLEX 3M	4058075504707	1	Silicone	30000	19.00	1000	1860	3000	>80	110	IP44

Product name	l (mm)	b (mm)	h (mm)	Quantity
--------------	--------	--------	--------	----------

NEON FLEX 5M	15000	5000.0	13.5	6.7	4
NEON FLEX 3M	15000	3000.0	13.5	6.7	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## NEON DIGITAL FLEX MULTICOLOR

DECORATIVE COLORFUL LED STRIPS FOR OUTDOOR USE WITH HOMOGENIOUS ILLUMINATION





LED MODULE INTEGRATED
REMOTE
DIFFUSE LIGHT
COLOR
LEDVANCE 3 year guarantee
1

Product name	GTIN (EAN)	No.	MATERIAL	t[h] <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	°	IP	15000	5000.0
--------------	------------	-----	----------	-------------------	---	------------------------	------------------------------	---	----	-------	--------

NEON DIGITAL FLEX 5M	4058075504769	1	Silicone	30000	23.00	180	-	160	IP44	15000	5000.0
NEON DIGITAL FLEX 3M	4058075504745	1	Silicone	30000	15.00	120	-	160	IP44	15000	3000.0

Product name	b [mm]	h [mm]	Icons
--------------	--------	--------	-------

NEON DIGITAL FLEX 5M	6.7	13.5	4
NEON DIGITAL FLEX 3M	6.7	13.5	4

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® PRO SPOT SENSOR**

HIGHLY EFFICIENT OUTDOOR WALL SENSOR SPOTLIGHT WITH NARROW BEAM ANGLE IN NOVEL DESIGN





1  
ENDURA PRO SPOT SENSOR  
16 W 1500 840 IP55 WT



2  
ENDURA PRO SPOT SENSOR  
16 W 1500 840 IP55 DG



3  
ENDURA PRO SPOT SENSOR  
8 W 750 840 IP55 WT



4  
ENDURA PRO SPOT SENSOR  
8 W 750 840 IP55 DG




Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t <sub>h</sub> <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	⚠
ENDURA PRO SPOT SENSOR 16 W 1500 840 IP55 WT	4058075228900	1	White	Plastic (PC)	50 000	16.00	1 500	2 140	4 000	≥80	50
ENDURA PRO SPOT SENSOR 16 W 1500 840 IP55 DG	4058075228924	2	Dark gray	Plastic (PC)	50 000	16.00	1 500	2 140	4 000	≥80	50
ENDURA PRO SPOT SENSOR 8 W 750 840 IP55 WT	4058075228863	3	White	Plastic (PC)	50 000	8.00	750	1 070	4 000	≥80	50
ENDURA PRO SPOT SENSOR 8 W 750 840 IP55 DG	4058075228887	4	Dark gray	Plastic (PC)	50 000	8.00	750	1 070	4 000	≥80	50

Product name	IP	l <sub>h</sub> <sup>2</sup> (mm)	w <sub>h</sub> <sup>2</sup> (mm)	h <sub>h</sub> <sup>2</sup> (mm)	⊞	
ENDURA PRO SPOT SENSOR 16 W 1500 840 IP55 WT	IP55	100 000	177.0	58.0	187.0	6
ENDURA PRO SPOT SENSOR 16 W 1500 840 IP55 DG	IP55	100 000	177.0	58.0	187.0	6
ENDURA PRO SPOT SENSOR 8 W 750 840 IP55 WT	IP55	100 000	87.0	58.0	187.0	6
ENDURA PRO SPOT SENSOR 8 W 750 840 IP55 DG	IP55	100 000	87.0	58.0	187.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **ENDURA® PRO UPDOWN SENSOR**

MODERN SHAPED WALL SENSOR LUMINAIRES WITH  
LIGHT OUTLET UP AND DOWN

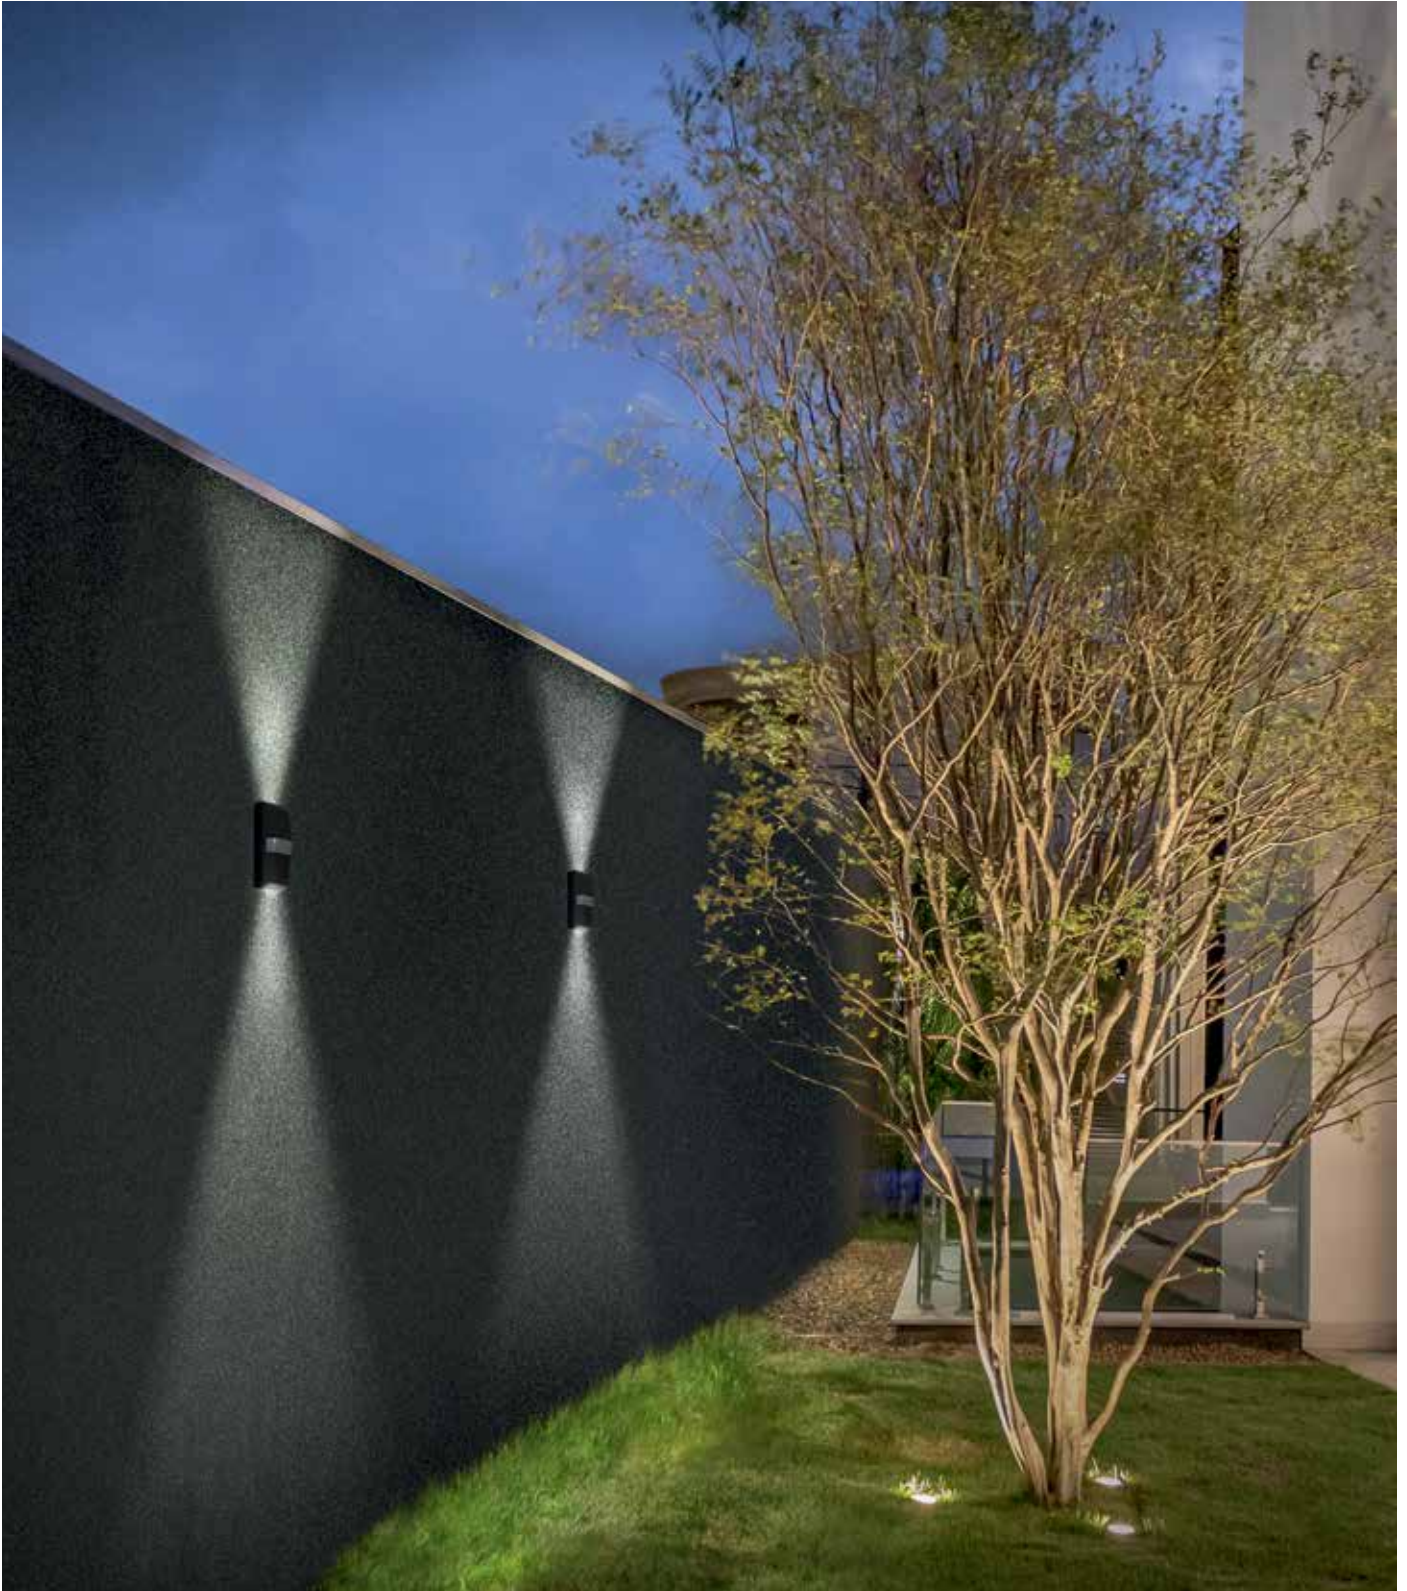



1  
ENDURA PRO UpDown SENSOR  
10 W 1000 840 IP55 WT



2  
ENDURA PRO UpDown SENSOR  
10 W 1000 840 IP55 DG



Product name	GTIN (EAN)	LED No.	COLOR	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	K	CRI	Recycling
--------------	------------	---------	-------	----------	-------------------	---	------------------------	------------------------------	---	-----	-----------

ENDURA PRO UpDown SENSOR 10 W 1000 840 IP55 WT	4058075228948	1	White	Plastic (PC)	50 000	10.00	1 000	1 360	4 000	≥80	50
ENDURA PRO UpDown SENSOR 10 W 1000 840 IP55 DG	4058075228962	2	Dark gray	Plastic (PC)	50 000	10.00	1 000	1 360	4 000	≥80	50

Product name	IP	l (mm)	w (mm)	h (mm)	Weight
--------------	----	--------	--------	--------	--------

ENDURA PRO UpDown SENSOR 10 W 1000 840 IP55 WT	IP55	15 000	87.0	55.0	180.0	6
ENDURA PRO UpDown SENSOR 10 W 1000 840 IP55 DG	IP55	15 000	87.0	55.0	180.0	6

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser

## **SMART<sup>+</sup> WIFI STRING LIGHT IP44 RGBW**

SMART OUTDOOR CHAIN OF LIGHTS WITH RGB COLOR CHANGE AND DIMMING FUNCTION







1  
SMART+ OUTDOOR WIFI STRING LIGHT



Product name	GTIN (EAN)	No.	MATERIAL	t(h) <sup>2</sup>	W	lm <sup>3</sup> OUTPUT	lm <sup>4</sup> LIGHT SOURCE	IP <sup>5</sup>	K	CRI	IP
SMART+ OUTDOOR WIFI STRING LIGHT	4058075763906	1	Plastic (ABS)	15000	4.50	120	240	F	2200	>80	IP44


Product name	x (mm)	l (mm)	b (mm)	h (mm)	Weight
SMART+ OUTDOOR WIFI STRING LIGHT	12	7468.0	44.7	210.0	2


**HOW TO READ OUR PRODUCT TABLES**

The new lighting regulation states that the new EU label indicating the energy efficiency class must be clearly visible on every product packaging. To make our product tables clearer and easier to read, the energy efficiency class isn't specified by a colored arrow but a letter. See on the right.

Energy efficiency class	Information Table
A →	A
B →	B
C →	C
D →	D
E →	E
F →	F
G →	G

<sup>1</sup> The exact terms and conditions can be found at [www.ledvance.com/consumer/services/guarantee](http://www.ledvance.com/consumer/services/guarantee) | <sup>2</sup> Average lifetime in hours | <sup>3</sup> Total luminous flux of the luminaire taking into account the diffuser | <sup>4</sup> Total luminous flux of the contained light sources without the diffuser | <sup>5</sup> Energy efficiency grade of the permanently integrated, non-exchangeable LED modules. Energy efficiency index (EEI) on a scale of A (highest efficiency) to G (lowest efficiency).

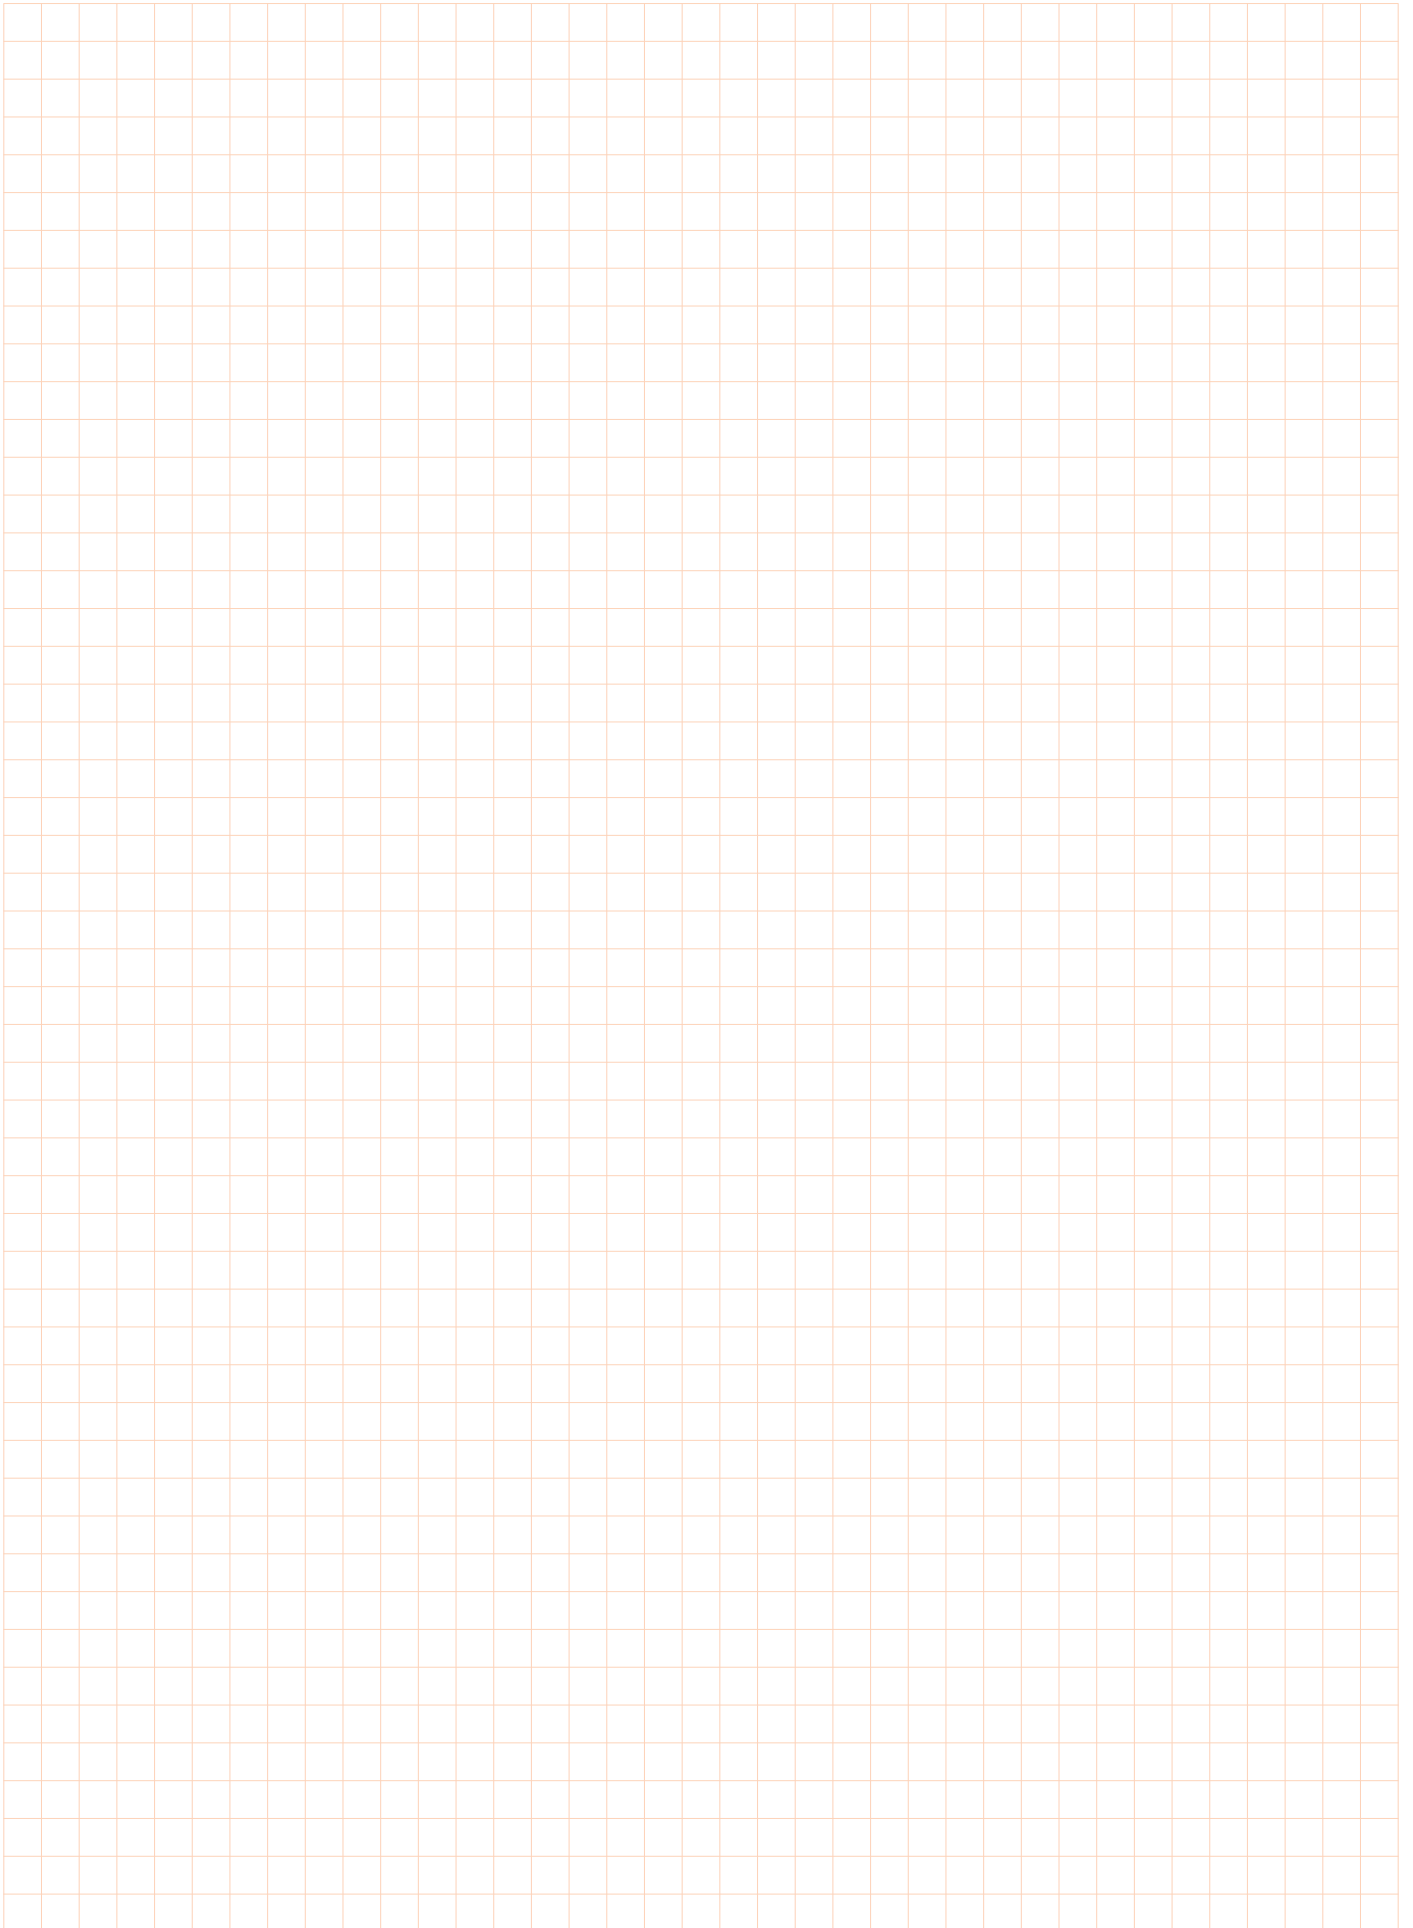

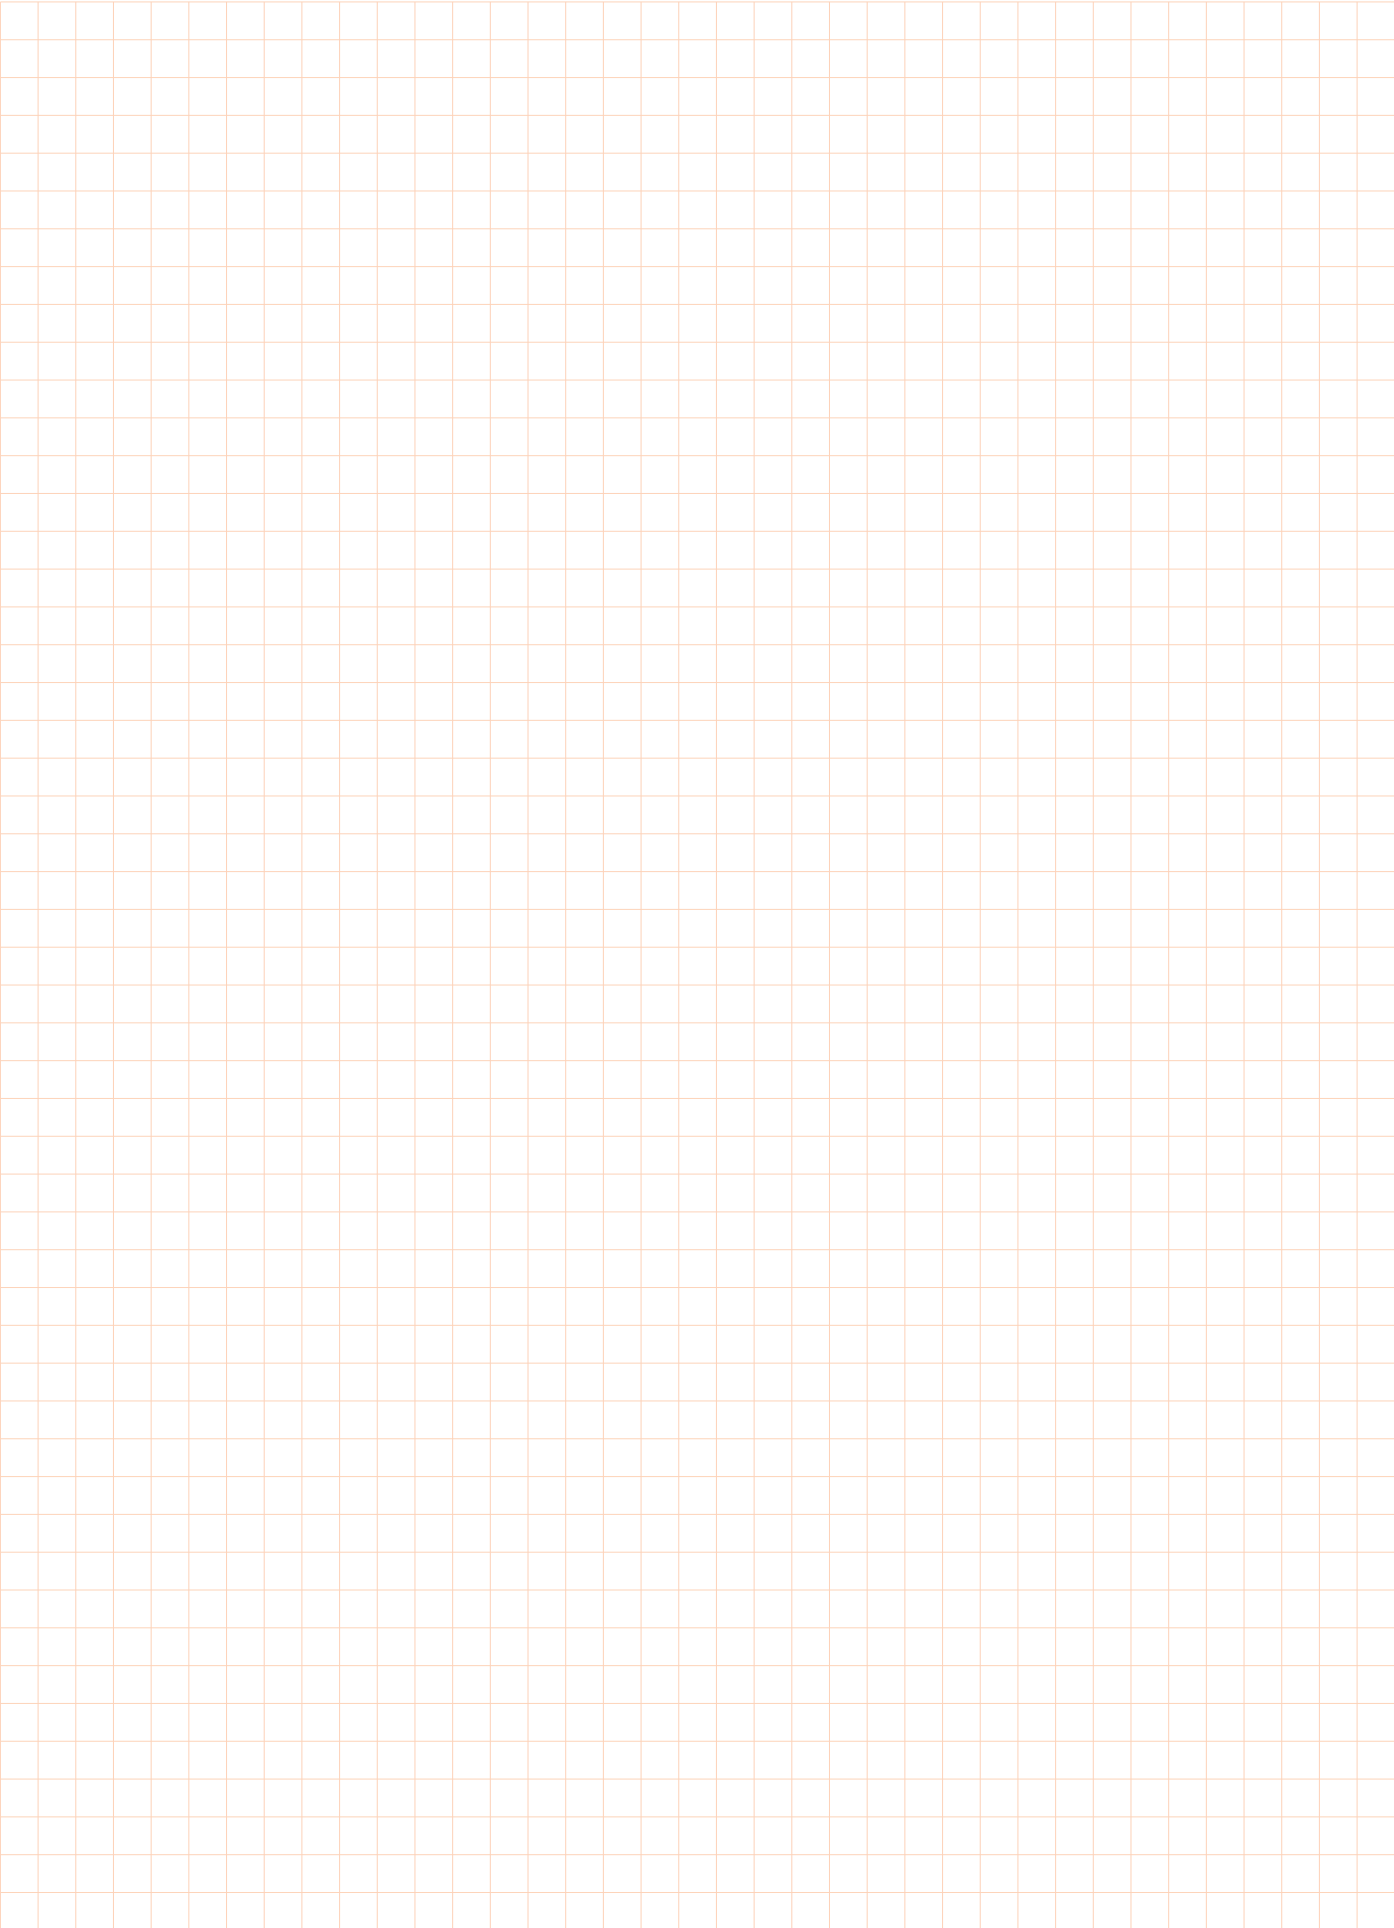

## ABOUT LEDVANCE

With offices in more than 50 countries and business activities in more than 140 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and end consumers. Having emerged from OSRAM's general lighting division, LEDVANCE offers a wide-ranging portfolio of LED luminaires for a broad spectrum of applications, intelligent lighting products for Smart Home and Smart Building solutions, one of the most comprehensive ranges of advanced LED lamps in the lighting industry, traditional light sources, an LED Strip System and light management systems.



# LEDVANCE

### Customer Service Centre:

[kundenservice.retail@ledvance.com](mailto:kundenservice.retail@ledvance.com)

Germany:

Phone: +49 89 780673-670

Fax: +49 89 780670-665

LEDVANCE GmbH

Parkring 29–33

85748 Garching

Germany

**LEDVANCE.COM**



**LEDVANCE.COM**